

★

RESTRICTED

DIST: 4, 5, 7, 8,
FILE: BEGHT

T. O. NO. 01-75F-1

*PILOT'S FLIGHT OPERATING
INSTRUCTIONS*

FOR

ARMY MODELS

P-38 Series

F-4 and F-5 Series

NOTICE: This document contains information affecting the National Defense of the United States within the meaning of the Espionage Act, 50 U. S. C., 31 and 32, as amended. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

Published by authority of the Commanding General, Army Air Forces.

THIS PUBLICATION MAY BE USED BY PERSONNEL RENDERING SERVICE TO THE UNITED STATES OR ITS ALLIES

Paragraph 5.d. of Army Regulation 380-5 relative to the handling of "restricted" printed matter is quoted below.

"d. Dissemination of restricted matter.—The information contained in restricted documents and the essential characteristics of restricted material may be given to any person known to be in the service of the United States and to persons of undoubted loyalty and discretion who are cooperating

in Government work, but will not be communicated to the public or to the press except by authorized military public relations agencies."

This permits the issue of "restricted" publications to civilian contract and other accredited schools engaged in training personnel for Government work, to civilian concerns contracting for overhaul and repair of aircraft or aircraft accessories, and to similar commercial organizations.

LIST OF REVISED PAGES ISSUED

NOTE: A heavy black vertical line, to the left of the text on revised pages, indicates the extent of the revision. This line is omitted where more than 50 percent of the page is revised.

Page No.	Latest Revised Date
B (Deleted)	September 1-43
C (Deleted)	September 1-43
1	September 1-43
5	May 15-43
8	May 15-43
14	May 15-43
15	September 1-43
17	May 15-43
20	September 1-43
21	September 1-43
22	September 1-43
23	September 1-43
24	September 1-43
25	September 1-43
26	September 1-43
27	September 1-43
28	September 1-43
29	September 1-43
30	September 1-43
31	September 1-43
32	September 1-43
32A	September 1-43
33	May 15-43
45	May 15-43
46	May 15-43
62	May 15-43
69	May 15-43
73	May 15-43
74	May 15-43

ADDITIONAL COPIES of this publication may be secured on Requisition, AAF Form 102, as prescribed in AAF Regulations 15-102. Submit requisitions to: Commanding General, Air Service Command, Patterson Field, Fairfield, Ohio. Also, see T. O. No. 00-25-3 for details on distribution of Technical Orders. (Requests from Naval activities shall be submitted to: Chief of the Bureau of Aeronautics, Navy Department, Washington, D. C.)

CONTENTS

SECTION	PAGE	SECTION	PAGE
I Description	5	Weight and Balance Chart—P-38G Series	40
1. General	5	Weight and Balance Chart—F-4	41
2. Fuel, Oil and Coolant	5	Weight and Balance Chart—F-4A	42
3. Pilot Protection	5	Weight and Balance Chart—F-5A Series	43
II Pilot Operating Instructions	20	Specific Engine Flight Chart V-1710-27 and V-1710-29	44
1. Flight Restrictions	20	Specific Engine Flight Chart V-1710-49 and V-1710-53	45
2. Before Entering Cockpit	20	Specific Engine Flight Chart V-1710-51 and V-1710-55	46
3. On Entering the Cockpit	21	Take-off, Climb and Landing Chart P-38D, P-38E and F-4	47
4. Starting Engines	22	Take-off, Climb and Landing Chart P-38F and F-4A Series	48
5. Engine Warm-up	23	Take-off, Climb and Landing Chart P-38G and F-5A Series	49
6. Emergency Take-off	23	Flight Operation Instruction Chart P-38D, P-38E & F-4 (without droppable tank)	50
7. Engine and Accessories Ground Test	23	Flight Operation Instruction Chart P-38D, P-38E & F-4 (with 150 gallon tank)	51
8. Taxiing Instructions	24	Flight Operation Instruction Chart P-38D, P-38E & F-4 (with 300 gallon tank)	52
9. Take-off	24	Flight Operation Instruction Chart P-38D, P-38E & F-4 (with one propeller feathered)	53
10. Engine Failure During Take-off	25	Flight Operation Instruction Chart P-38F & F-4A Series (without droppable tank)	54
11. Climb	26	Flight Operation Instruction Chart P-38F & F-4A Series (with 150 gallon tank)	55
12. Flight Operations	26	Flight Operation Instruction Chart P-38F & F-4A Series (with 300 gallon tank)	56
13. General Flying Characteristics	28	Flight Operation Instruction Chart P-38F & F-4A Series (with one propeller feathered) ...	57
14. Engine Failure During Flight	28	Flight Operation Instruction Chart P-38G & F-5A Series (without droppable tank)	58
15. Stalls	29	Flight Operation Instruction Chart P-38G & F-5A Series (with 150 gallon tank)	59
16. Spins	29	Flight Operation Instruction Chart P-38G & F-5A Series (with 300 gallon tank)	60
17. Acrobatics	29	Flight Operation Instruction Chart P-38G & F-5A Series (with one propeller feathered)	61
18. Diving	30		
19. Night Flying	31		
20. Emergency Exit	31		
21. Approach, Landing and Cross-Wind Landing	31		
22. Stopping of Engines	32		
23. Before Leaving Cockpit	32 A		
24. Airspeed Correction Table	32 A		
III Flight Operation Data	33		
1. Weight and Balance Computations	33		
Weight and Balance Chart—P-38D	34		
Weight and Balance Chart—P-38E	35		
Weight and Balance Chart—P-38F	36		
Weight and Balance Chart—P-38F-1-LO	37		
Weight and Balance Chart—P-38F-5-LO	38		
Weight and Balance Chart— P-38F-13-LO, P-38F-15-LO, P-38G-15-LO	39		

CONTENTS—(cont.)


SECTION	PAGE	SECTION	PAGE
IV Operating Equipment	62	3. Operation of Armament	69
1. Oxygen System	62	a. General	69
2. Operation of Communication Equipment	64	b. Operation of Machine Guns	69
a. General	64	c. Operation of 20 MM Cannon	69
b. Operation of SCR-AL-283 Radio Set	64	d. Operation of 37 MM Cannon	70
c. Operation of SCR-274N Radio Set	65	e. Operation of Optical Gun Sight	70
d. Operation of SCR-522 Radio Set	66	f. Operation of Gun Camera	70
e. Operation of BC-608 Contactor	67	g. Armament Heat	70
f. Operation of SCR-535 Radio	68	b. To Drop Bombs	70
g. Operation of Type 185 Receiver	69	4. Operation of Photographic Equipment	70
b. Operation of RCA AVR-100 or		a. General	70
AVR-101 Receiver	69	b. Ground Operations (for photographer)	70
		c. Camera Operation (for pilot)	72
		APPENDIX I U.S.A.-British	
		Glossary of Nomenclature	75

ILLUSTRATIONS

FIGURE	PAGE	FIGURE	PAGE
1 Lockheed P-38 Fighter Airplane	4	19 Flap Hydraulic System	19
2 Lockheed P-38 with Droppable Fuel Tanks	5	20 Coolant Radiator Exit Flap Hydraulic System	19
3 Fuselage Contents Arrangement	6	21 Cannon Charger Hydraulic System	19
4 Instrument Panel	7	22 Access Ladder	20
5 Cockpit (Right Front)	8	23 Hatch Controls	20
6 Cockpit (Left Front)	9	24 Dive Limits	29
7 Cockpit (Left Side)	10	25 Controls-Constant Flow Oxygen System	
8 Cockpit (Right Side)	10	and 37 MM Cannon	62
9 Cockpit (Left Rear)	11	26 Oxygen Systems	63
10 Cockpit—F-4 Photographic Airplanes		27 Controls Demand Type Oxygen System	
(Left Rear)	11	and 20 MM Cannon	64
11 Cockpit (Right Rear)	11	28 Controls—SCR-283 Radio Set	64
12 Armor Diagram	12	29 Controls—SCR-274 Radio Set	66
13 Fuel System—P-38D	13	30 Controls—SCR-522 Radio Set and	
14 Fuel System—P-38E, P-38F	14	Type 185 Receiver	67
15 Fuel System—Airplanes with Droppable Tanks	15	31 BC 608 Contactor	68
16 Oil System	16	32 Controls—SCR-535 Radio	68
17 Main Hydraulic System	17	33 Photographic Equipment Controls—	
18 Landing Gear Hydraulic System	18	F-4 Airplane	71
		34 Intervalometer Setting Table	74

WHAT'RE ALL THE
GADGETS FOR?

Do you know?

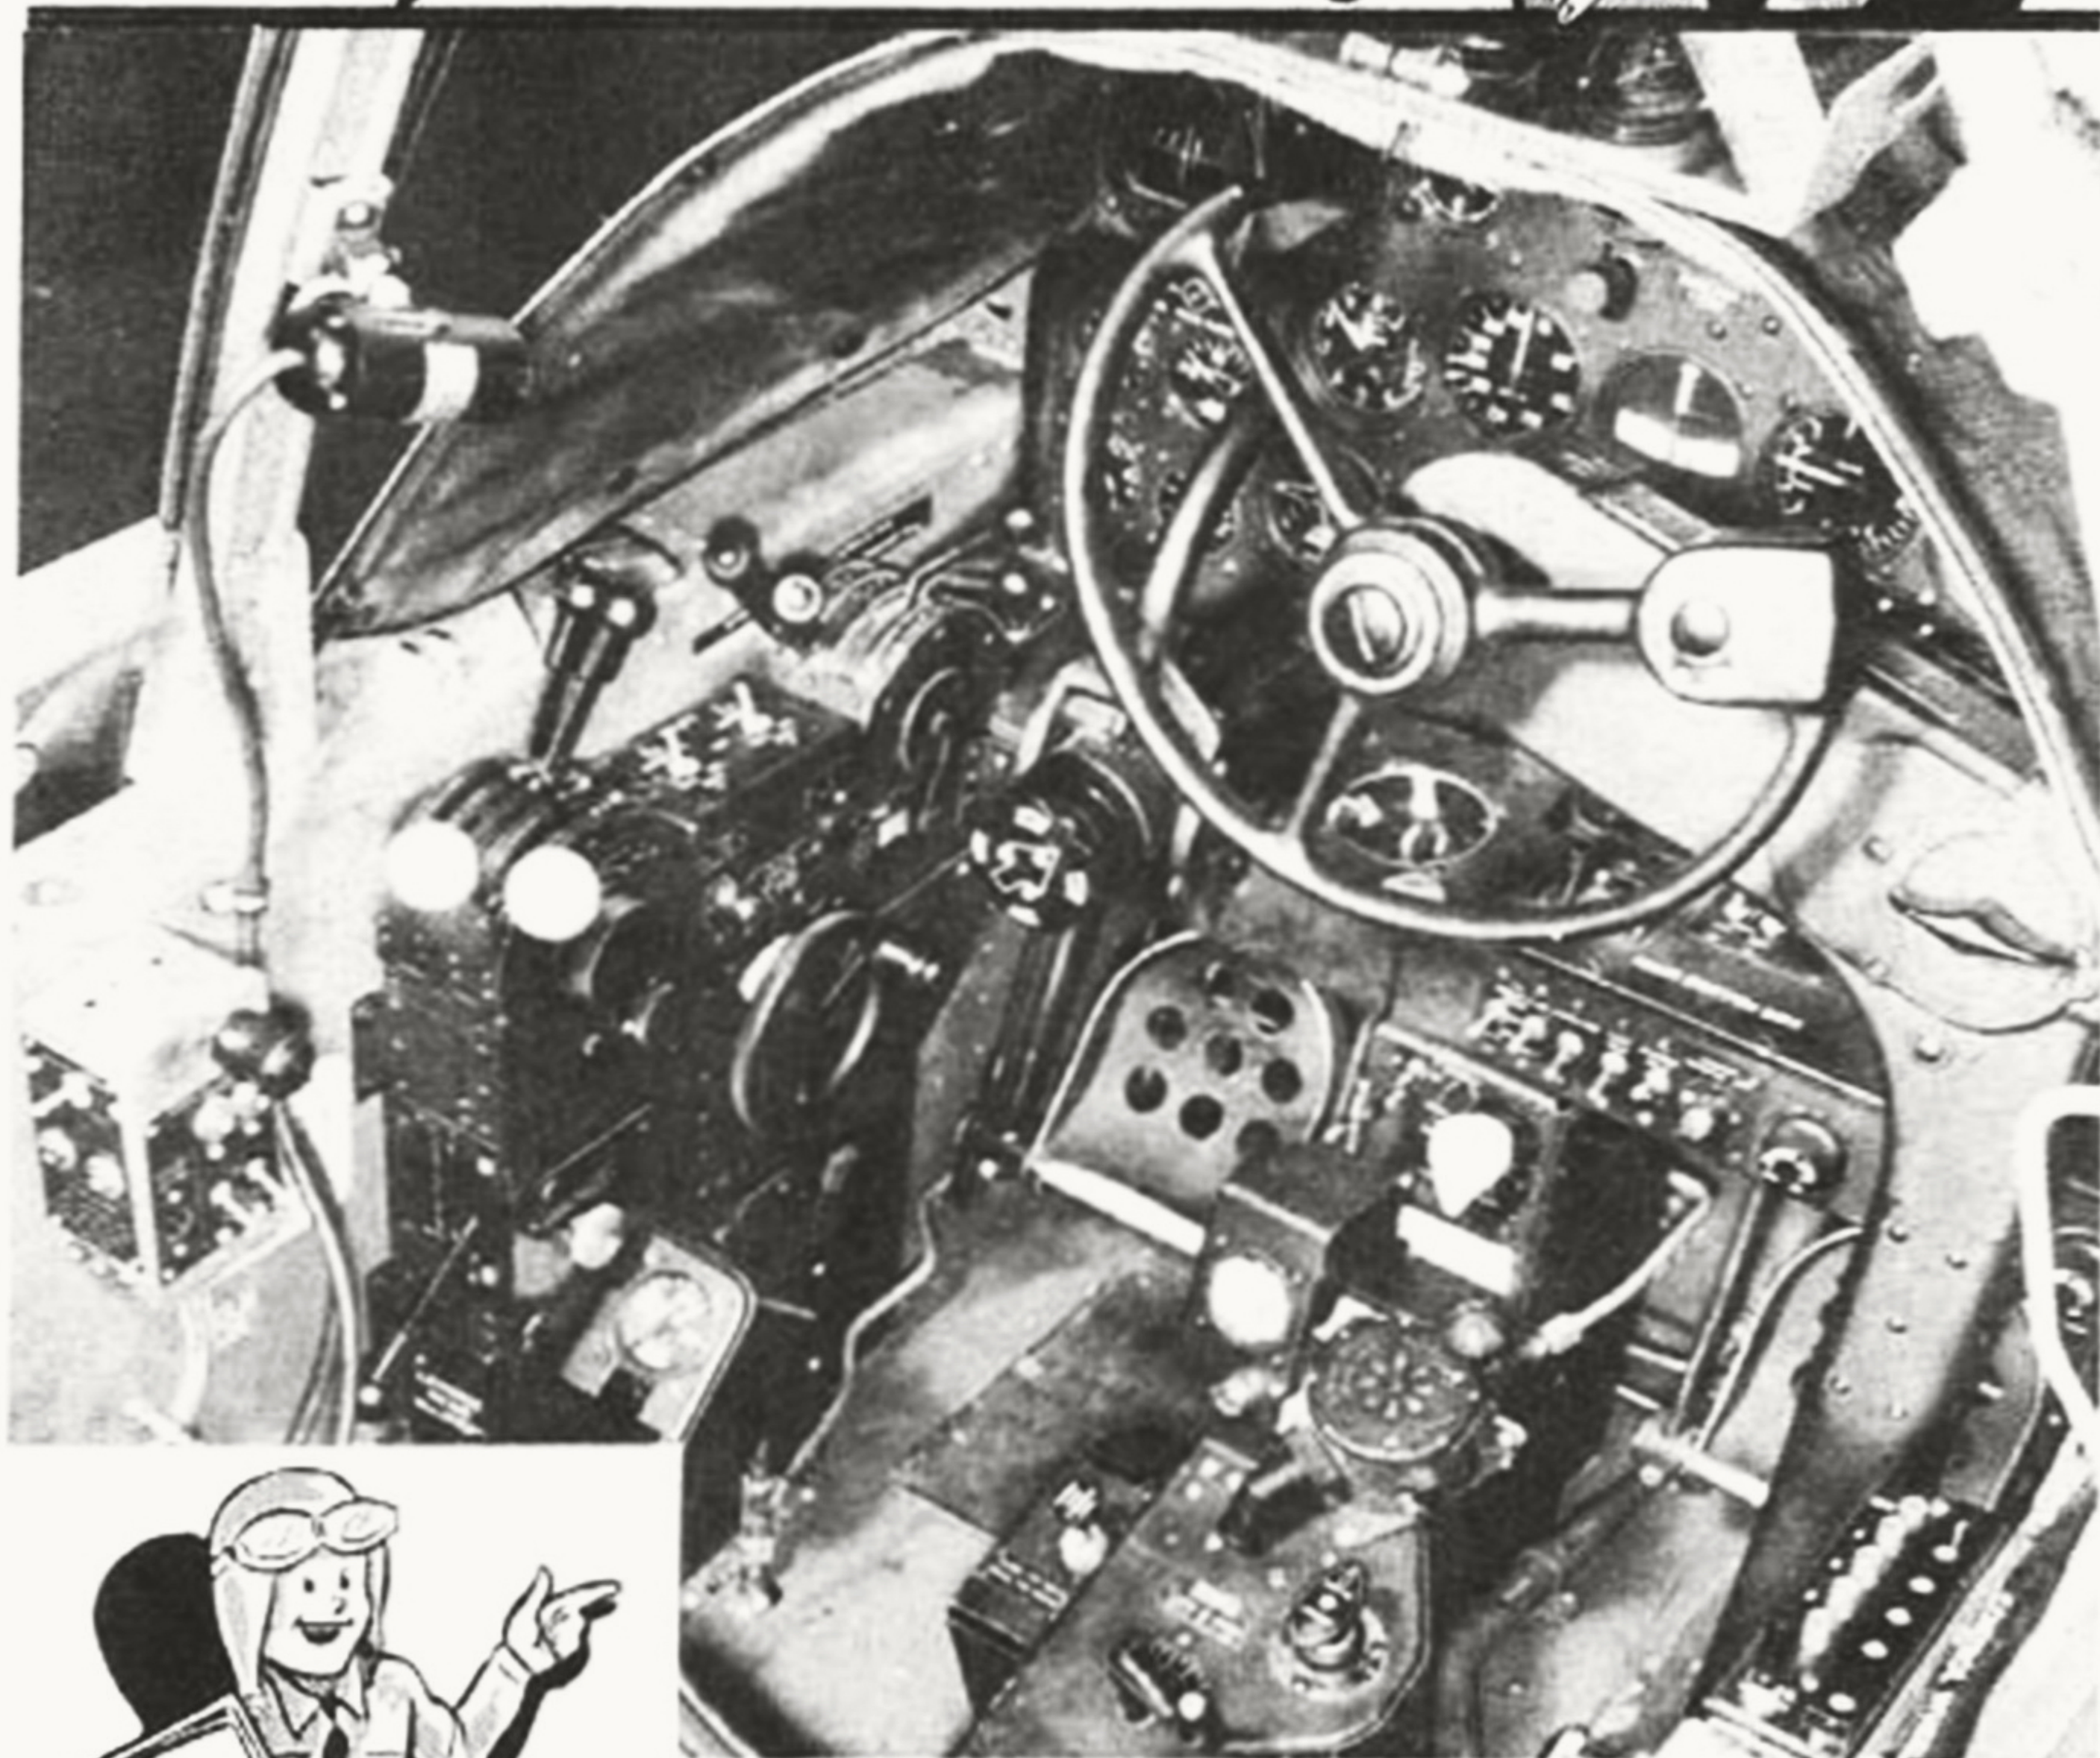

Read this manual and find out!

**KNOW YOUR AIRPLANE
BEFORE TAKING OFF**



FIGURE 1—LOCKHEED P-38 FIGHTER AIRPLANE



FIGURE 2—LOCKHEED P-38 WITH DROPPABLE FUEL TANKS

SECTION I DESCRIPTION

1. GENERAL.

This handbook covers the model RP-38D, RP-38E, P-38F, P-38F-1, P-38F-5, P-38F-13, P-38F-15, P-38G-1, P-38G-3, P-38G-5, P-38G-10, and P-38G-15 fighter airplanes, and the model F-4, F-4A, F-5A-1, F-5A-3, and F-5A-10 photographic airplanes. These airplanes are manufactured by Lockheed Aircraft Corporation, Burbank, California, under Contracts A-242, W535 ac 13205, W535 ac 15646, and W535 ac 21217.

They are tricycle geared, land monoplanes, powered with turbo-supercharged, twelve-cylinder, Allison, model V-1710-27 and -29, V-1710-49 and -53, or V-1710-51 and -55 engines.

Each engine drives a Curtiss electric, three-bladed, constant speed, full feathering propeller. Hydraulically operated flaps, landing gear, coolant shutters, cannon charger, and brakes are provided.

NOTE: The Hydraulic cannon charger has been deleted from airplanes serial No. 42-12567 and up, and serial No. 43-2035 and up.

The approximate overall dimensions are as follows:


Length.....	37 Ft. 9 $\frac{1}{2}$ In.
Height.....	9 Ft. 9 $\frac{3}{4}$ In.
Span.....	52 Ft. 0 In.

2. FUEL, OIL, AND COOLANT.

- a. Fuel: Specification—AN-VV-F-781
Octane—100
- b. Oil: Specification—AN-VV-O-446A
Viscosity—1120
- c. COOLANT: Specification—AN-E-2
Name—Ethylene Glycol

3. PILOT PROTECTION.

Front and rear armor is provided to protect the pilot from direct right angle .30 caliber fire originating within the shaded areas illustrated in Figure 12.

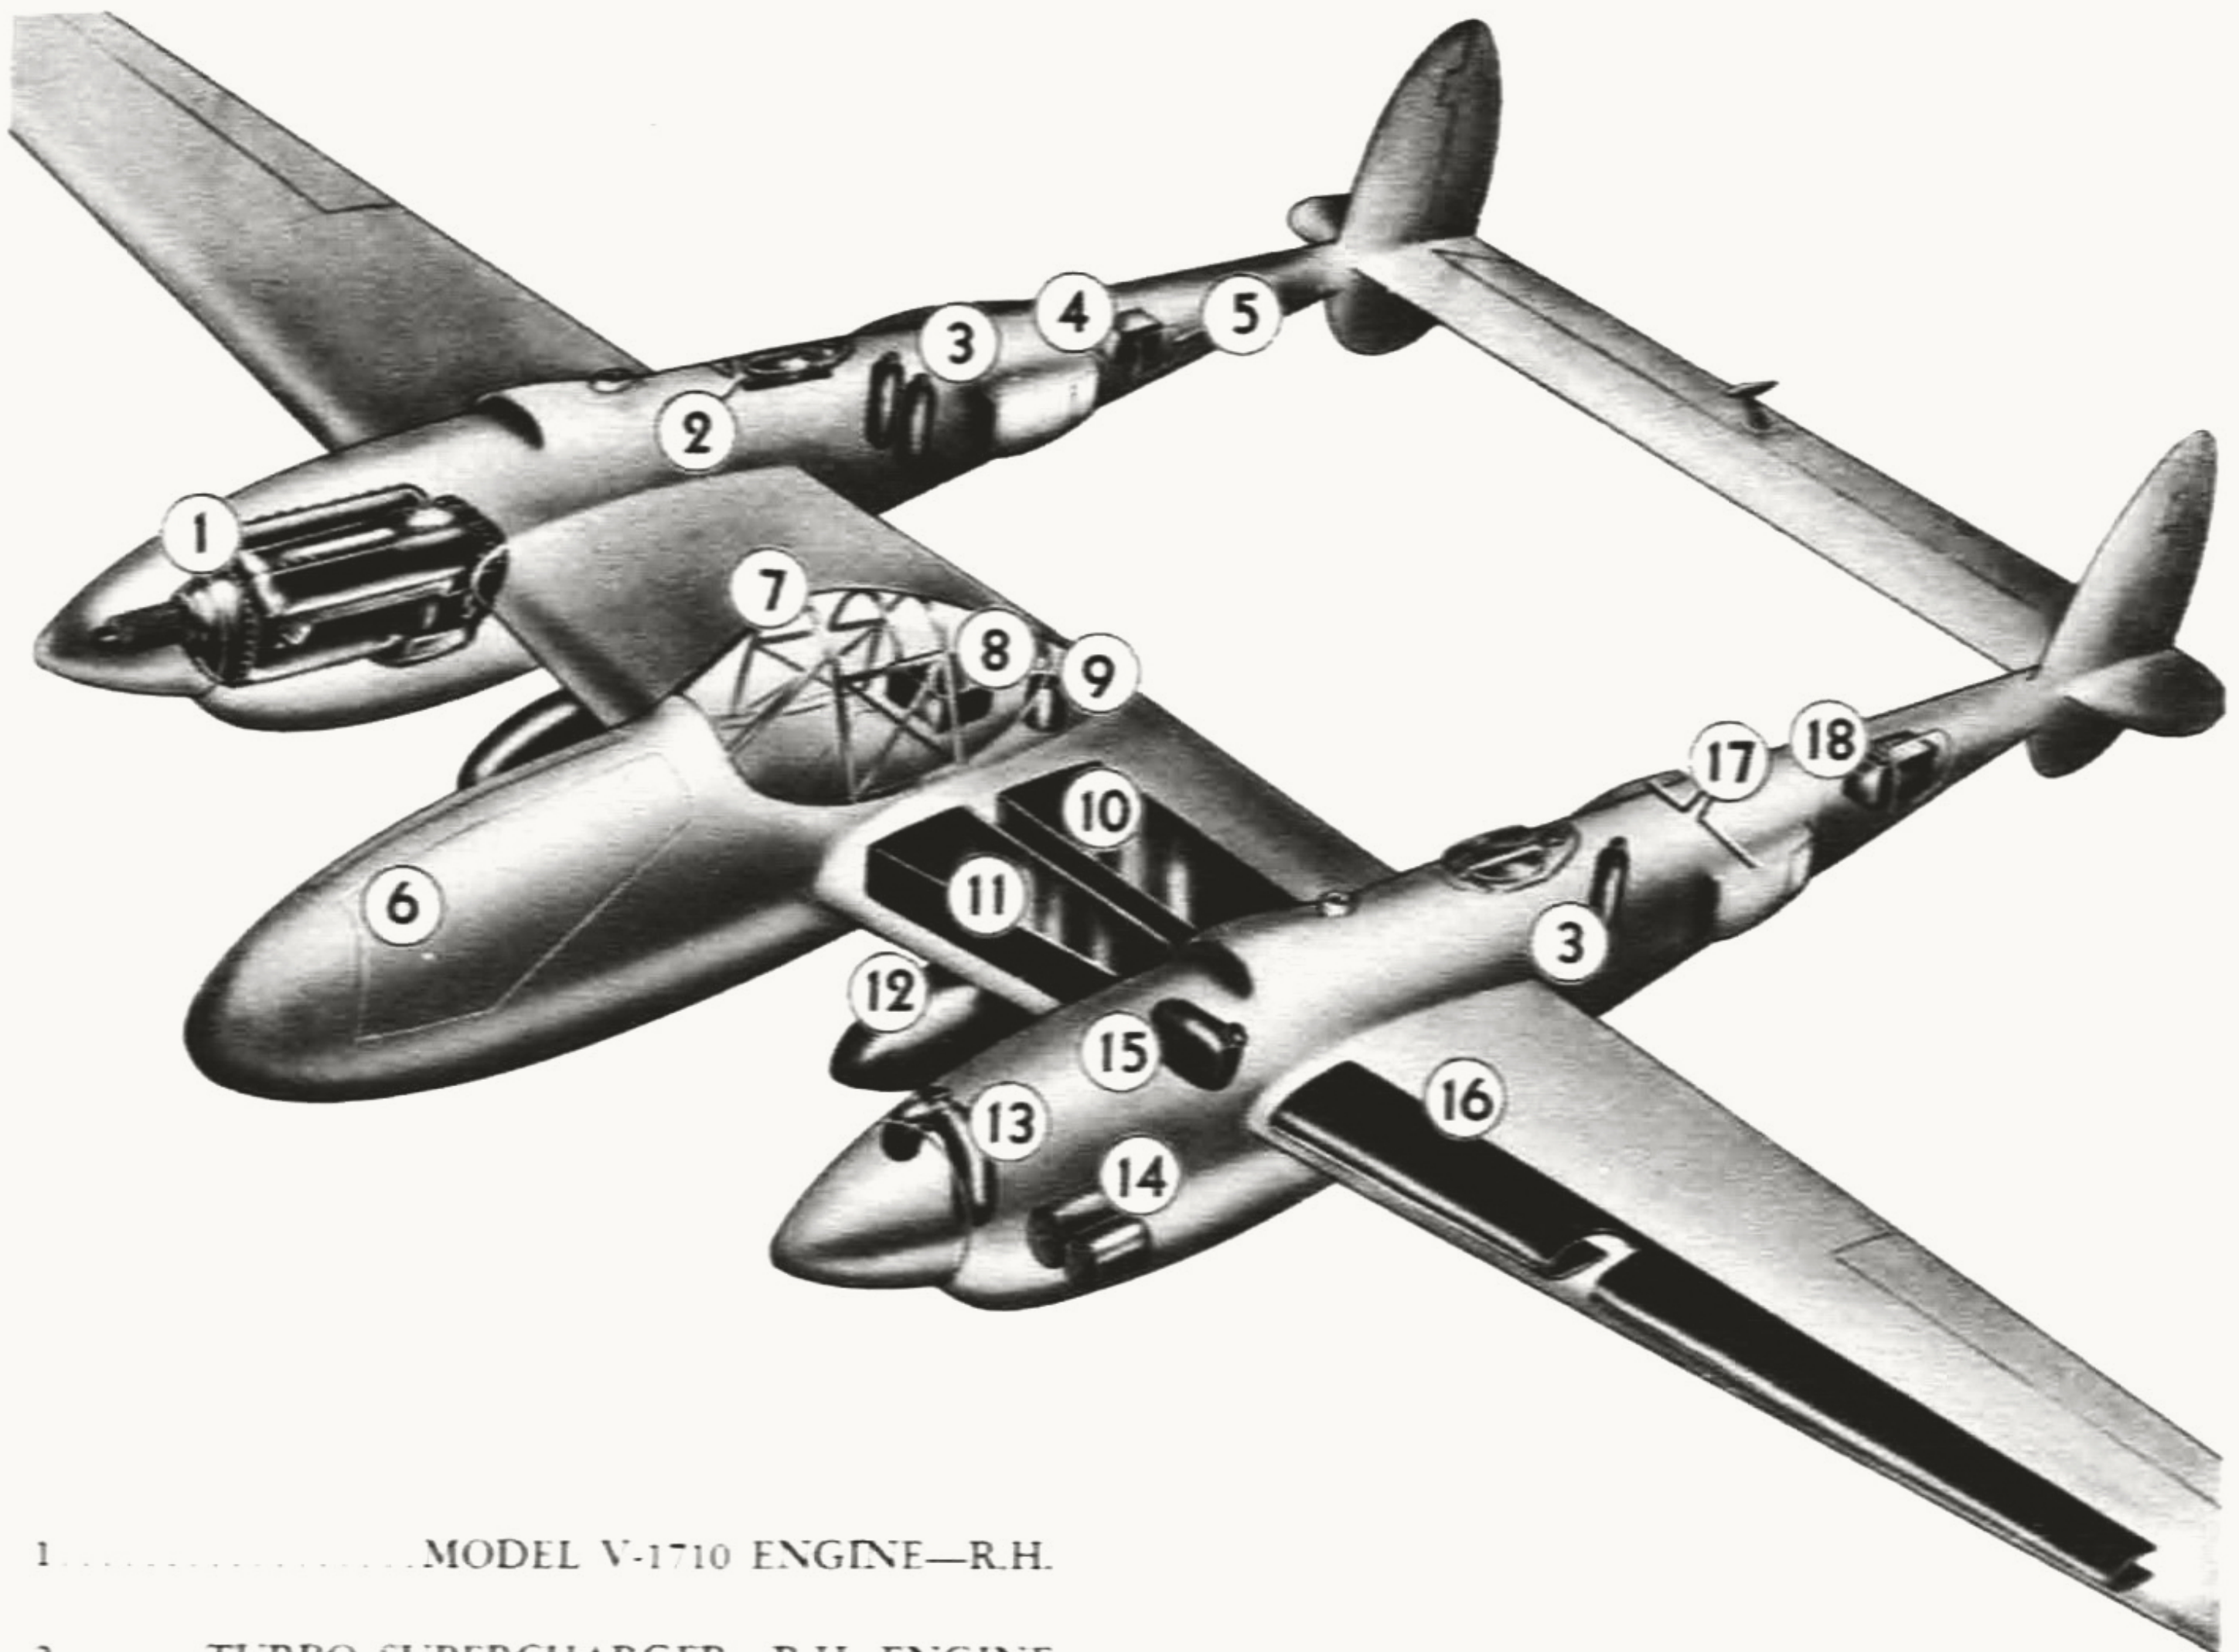

1.....MODEL V-1710 ENGINE—R.H.

2.....TURBO SUPERCHARGER—R.H. ENGINE

3.....OXYGEN CYLINDERS (Typical Installation)

4.....RECOGNITION RADIO

5.....BAGGAGE COMPARTMENT (Located in L.H.
Boom in Camera Airplanes)

6.....ARMAMENT COMPARTMENT OR CAMERA
COMPARTMENT

7.....COCKPIT

8.....RADIO EQUIPMENT

9.....HYDRAULIC RESERVOIR

10.....MAIN WING TANK—L.H.

11.....RESERVE WING TANK—L.H.

12.....EXTERNAL DROPPABLE FUEL TANK—L.H.

13.....COOLANT TANK—L.H. ENGINE

14.....OIL RADIATORS—L.H. ENGINE

15.....OIL TANK—L.H. ENGINE

16.....INTERCOOLER—L.H. ENGINE

17.....COOLANT RADIATOR—L.H. ENGINE


18.....BATTERY Located in Fuselage Nose in
Camera Airplanes)

FIGURE 3—FUSELAGE CONTENTS ARRANGEMENT



- | | |
|---|--|
| 1.....SUCTION GAGE SELECTOR VALVE | 18.....ALTIMETER |
| 2.....SUCTION GAGE | 19.....AIRSPEED INDICATOR |
| 3.....COMPASS CORRECTION CARD HOLDER | 20.....BANK AND TURN INDICATOR |
| 4.....TURN INDICATOR | 21.....RATE OF CLIMB INDICATOR |
| 5.....FLIGHT INDICATOR | 22.....TACHOMETER (Right and Left Engines) |
| 6.....FLAP AND LANDING GEAR PLACARD | 23.....OIL PRESSURE GAUGE (Right and Left Engines) |
| 7.....FLIGHT INDICATOR CAGING KNOB | 24.....LANDING GEAR AND FLAP POSITION INDICATOR |
| 8.....COMPASS | 25.....MACHINE GUNS AND CANNON BLINKER LIGHTS |
| 9.....MANIFOLD PRESSURE GAGE (Right and Left Engines) | 26.....COOLANT TEMPERATURE WARNING LIGHTS (Right and Left Engines) |
| 10.....FREE AIR TEMPERATURE GAGE | 27.....COOLANT TEMPERATURE INDICATOR (Right and Left Engines) |
| 11.....CLOCK | 28.....OIL TEMPERATURE INDICATOR (Right and Left Engines) |
| 12.....RADIO CALL PLATE | 29.....FUEL PRESSURE GAGE (Right and Left Engines) |
| 13.....FUEL PRESSURE WARNING LIGHTS (Right and Left Engines) | 30.....CARBURETOR AIR TEMPERATURE (Right and Left Engines) |
| 14.....HYDRAULIC SYSTEM PRESSURE GAGE | |
| 15.....FUEL QUANTITY INDICATOR (Front Tanks) | |
| 16.....FUEL QUANTITY INDICATOR (Rear Tanks) | |
| 17.....OIL COOLER FLAPS POSITION INDICATOR (Right and Left Engines) | |


FIGURE 4—TYPICAL INSTRUMENT PANEL

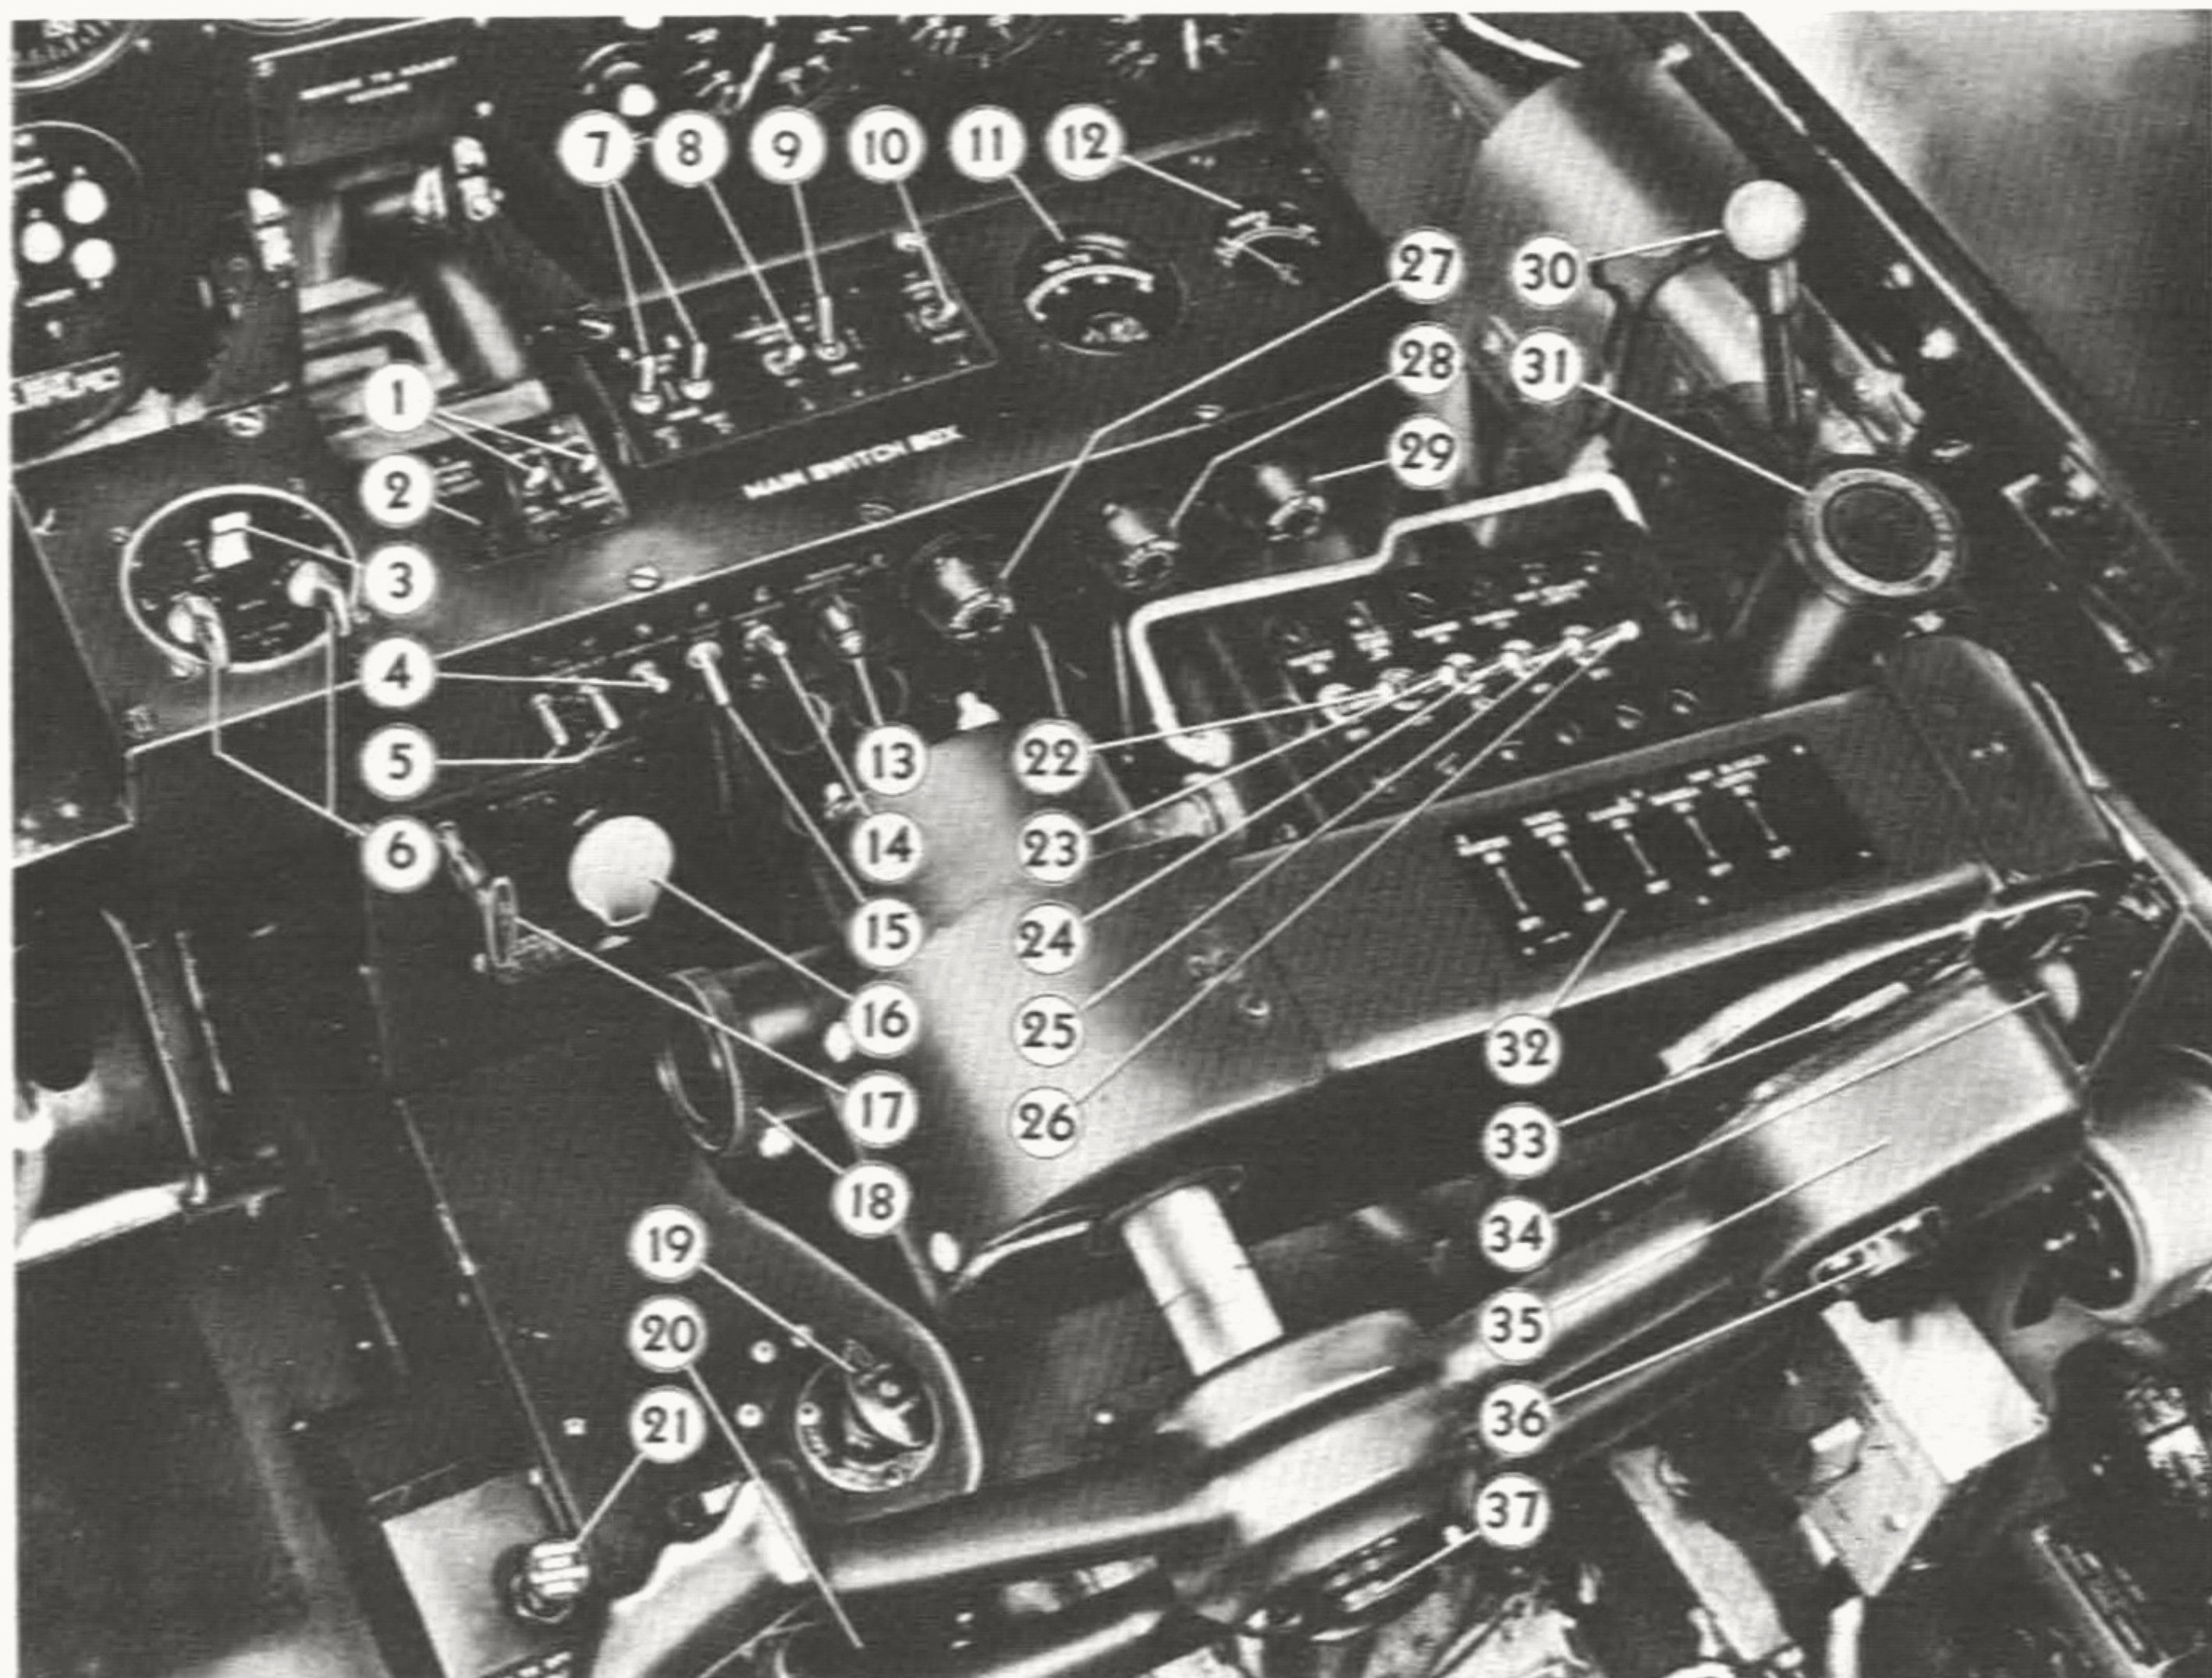

- 1 OIL DILUTION CONTROL SWITCHES
(Left and Right)
- 2 SPARE INSTRUMENT LIGHT
- 3 AIRPLANE MASTER SWITCH
- 4 GENERATOR CONTROL SWITCH
- 5 OIL COOLERS FLAP CONTROL SWITCHES
(Left and Right)
- 6 ENGINE IGNITION SWITCHES
(Left and Right)
- 7 ENGINE STARTER CONTROL SWITCHES
(Left and Right)
- 8 FLUORESCENT INSTRUMENT LIGHT
CONTROL SWITCH
- 9 POSITION LIGHT SWITCH
- 10 LANDING LIGHT CONTROL SWITCH
- 11 VOLTMETER
- 12 AMMETER
- 13 INVERTER WARNING LIGHT
- 14 INVERTER SELECTOR SWITCH
- 15 PITOT HEAD HEATER SWITCH
- 16 CANNON CHARGER CONTROL
- 17 PARKING BRAKE CONTROL HANDLE


- 18 FLUORESCENT INSTRUMENT LIGHT
- 19 DUAL ENGINE PRIMER
- 20 RUDDER TAB CONTROL
- 21 CANNON CASE EJECTION DOOR
CONTROL KNOB
- 22 ARMAMENT MASTER SWITCH
- 23 MACHINE GUNS CONTROL SWITCH
- 24 CANNON CONTROL SWITCH
- 25 GUN CAMERA CONTROL SWITCH
- 26 GUN BLINKER CONTROL SWITCH
- 27 COMPASS LIGHT RHEOSTAT SWITCH
- 28 GUN SIGHT LIGHT RHEOSTAT SWITCH
- 29 COCKPIT LIGHTS RHEOSTAT SWITCH
- 30 FLAP CONTROL LEVER
- 31 FLUORESCENT INSTRUMENT LIGHT
- 32 ARMAMENT SWITCHES INSTRUCTION PLATE
- 33 MACHINE GUNS TRIGGER BUTTON
- 34 AILERON TAB CONTROL
- 35 PILOTS CONTROL WHEEL
- 36 CANNON TRIGGER BUTTON
- 37 MICROPHONE BUTTON

FIGURE 5—COCKPIT (RIGHT FRONT)

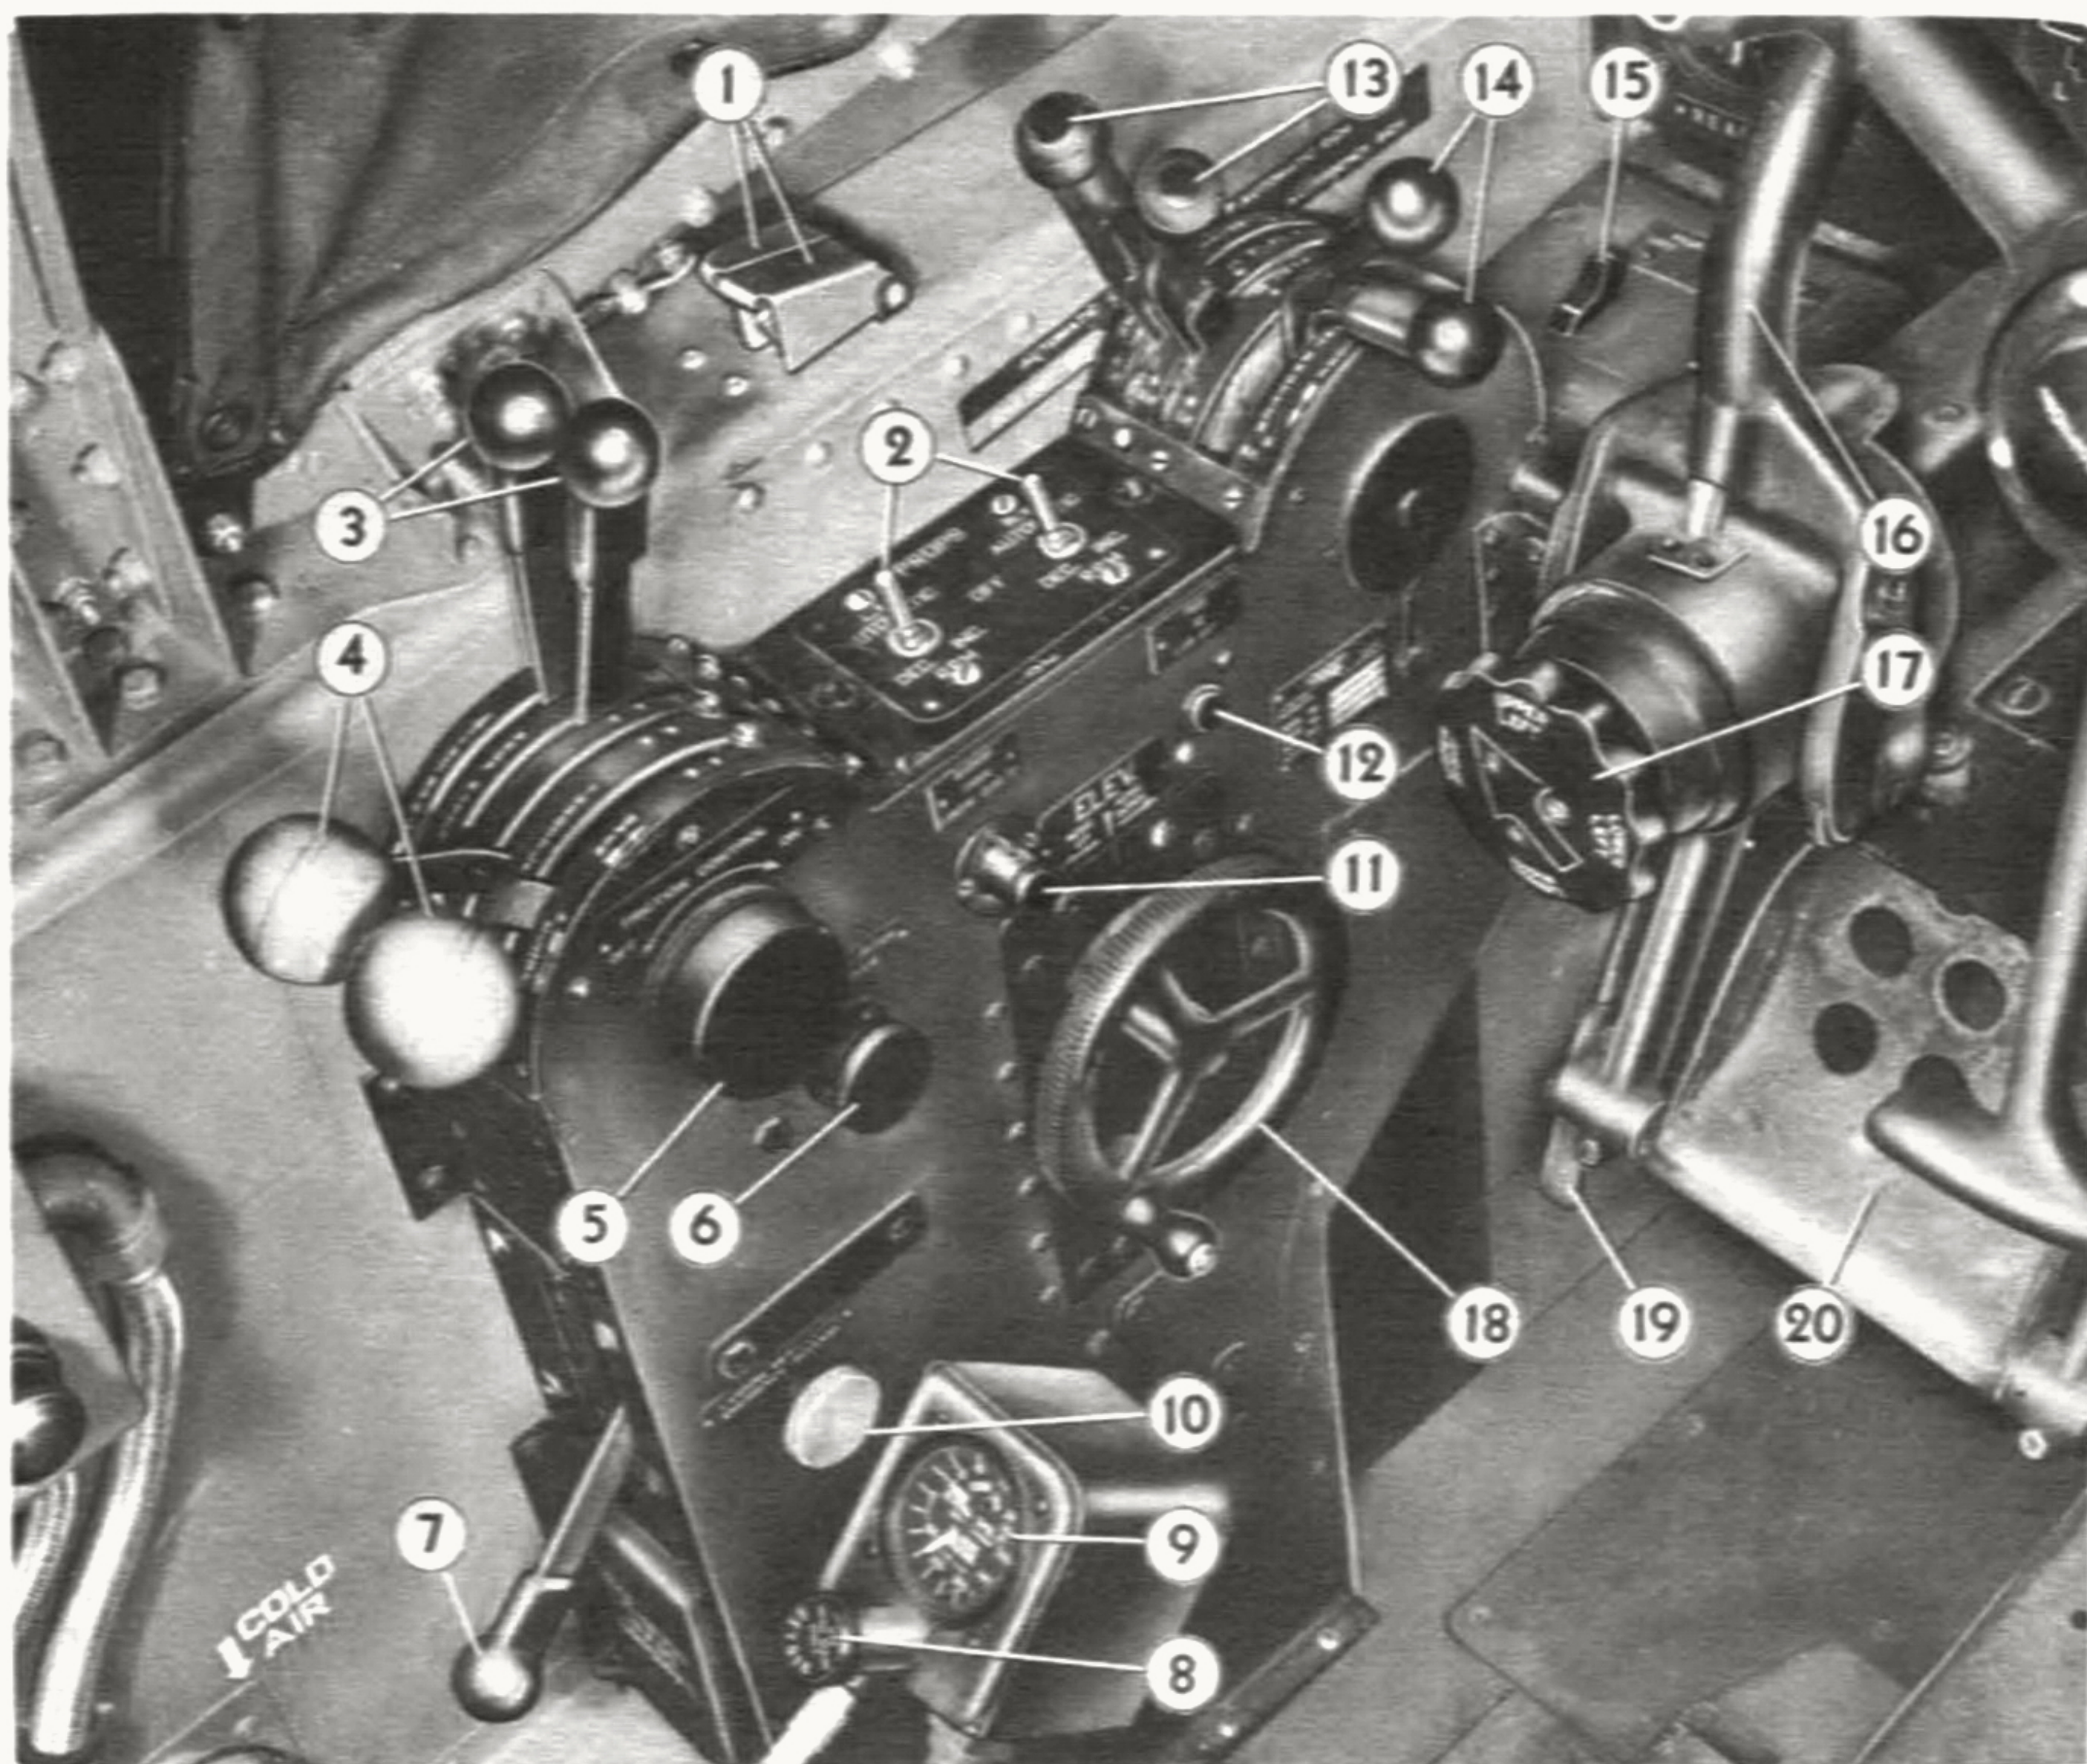


- | | |
|--|---|
| 1..... PROPELLER FEATHERING SWITCHES—
GUARDED (Left and Right) | 10..... LANDING GEAR LEVER EMERGENCY
RELEASE |
| 2..... PROPELLER SELECTOR SWITCHES—
AUTOMATIC MANUAL (Left and Right) | 11..... LANDING GEAR UP WARNING LIGHT |
| 3..... PROPELLER GOVERNOR CONTROLS
(Left and Right) | 12..... LANDING GEAR WARNING HORN STOP
BUTTON |
| 4..... THROTTLES (Left and Right) | 13..... MIXTURE CONTROLS (Left and Right) |
| 5..... FRICTION CONTROL | 14..... COOLANT SHUTTER CONTROLS
(Left and Right) |
| 6..... PROPELLER PITCH VERNIER CONTROL
(Right Engine) | 15..... PROPELLER SAFETY SWITCHES
(Left and Right) |
| 7..... LANDING GEAR CONTROL LEVER | 16..... MACHINE GUN CHARGER HANDLE |
| 8..... OXYGEN CONTROL VALVE | 17..... MACHINE GUN CHARGER SELECTOR |
| 9..... OXYGEN CYLINDER PRESSURE AND
FLOW INDICATOR | 18..... ELEVATOR TAB CONTROL WHEEL |
| | 19..... RUDDER PEDAL ADJUSTMENT LOCK—
LEFT |
| | 20..... RUDDER PEDAL AND TOE BRAKE—LEFT |

FIGURE 6—COCKPIT (LEFT FRONT)

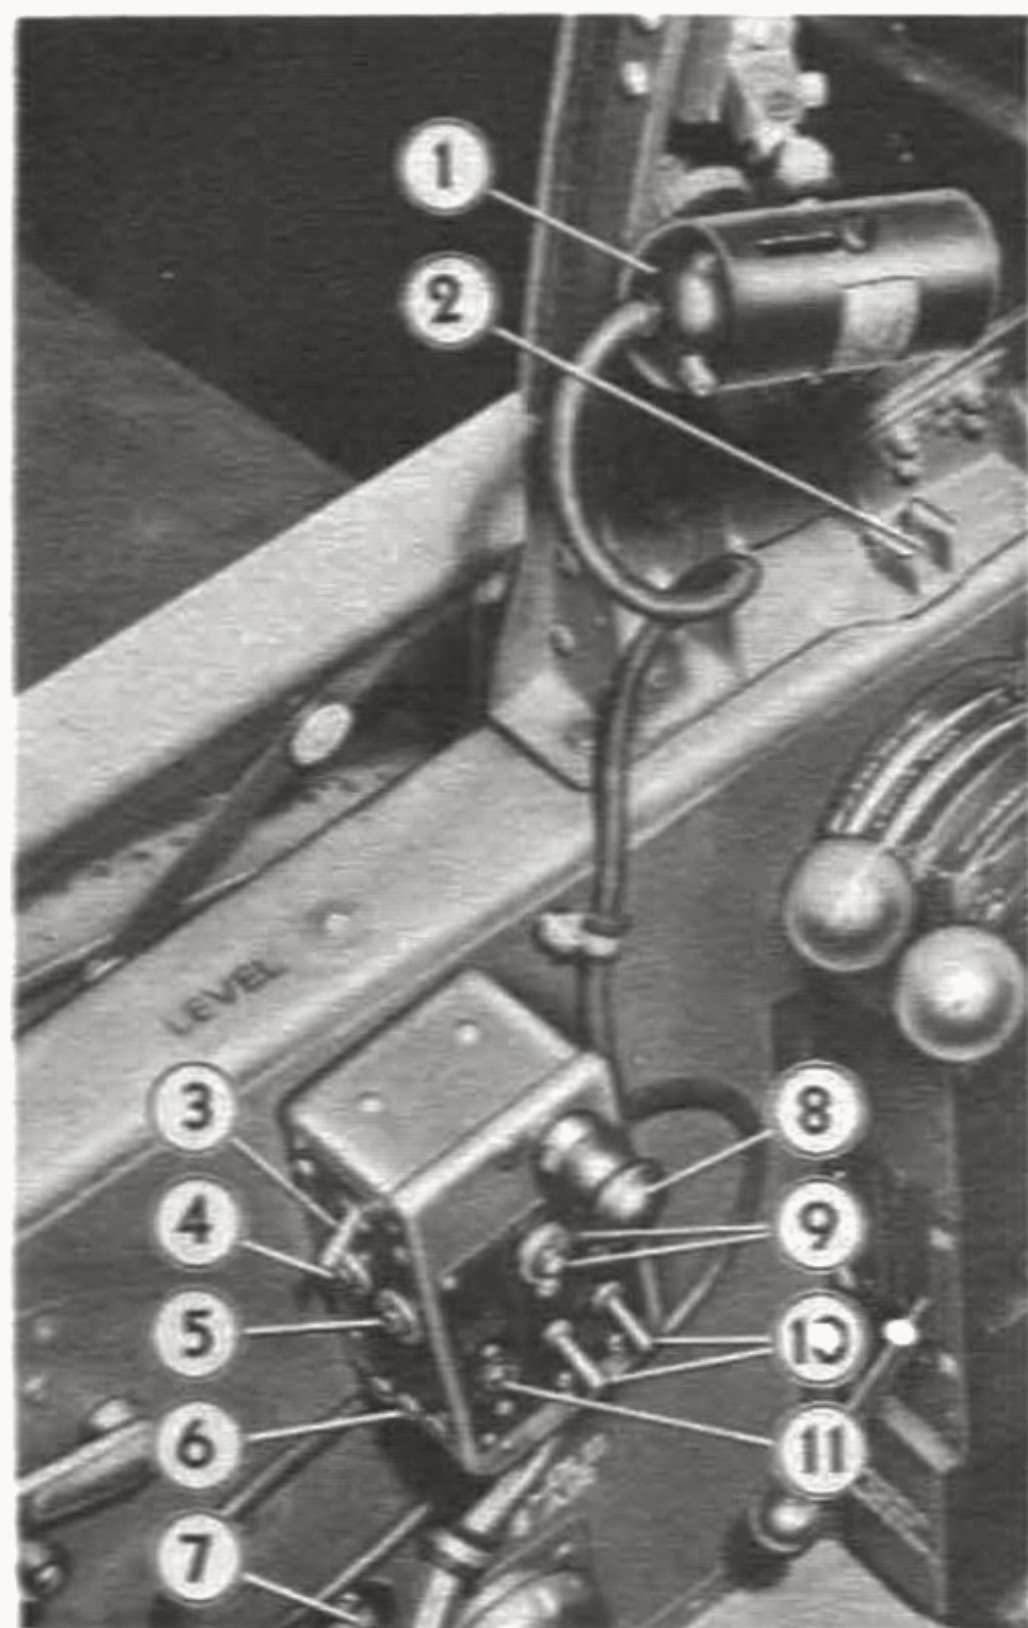


- 1.....AUXILIARY COCKPIT SWIVEL LIGHT
- 2.....SURFACE CONTROL LOCK CLIP
- 3.....BOMB ARMING SWITCH
- 4...BOMBS ARMED INDICATOR LIGHT—RED
- 5...BOMBS SAFE INDICATOR LIGHT—GREEN
- 6...SPARE INDICATOR LIGHTS—RED, GREEN AND AMBER
- 7...ALTERNATE MOUNTING FOR AUXILIARY COCKPIT SWIVEL LIGHT
- 8.....AUXILIARY COCKPIT LIGHT (Left)
- 9....BOMB OR DROPPABLE TANK SELECTOR SWITCH INDICATOR LIGHTS (Left and Right)
- 10....BOMB OR DROPPABLE TANK SELECTOR SWITCHES (Left and Right)
- 11....BOMB OR DROPPABLE TANK RELEASE BUTTON

FIGURE 7—COCKPIT (LEFT SIDE)

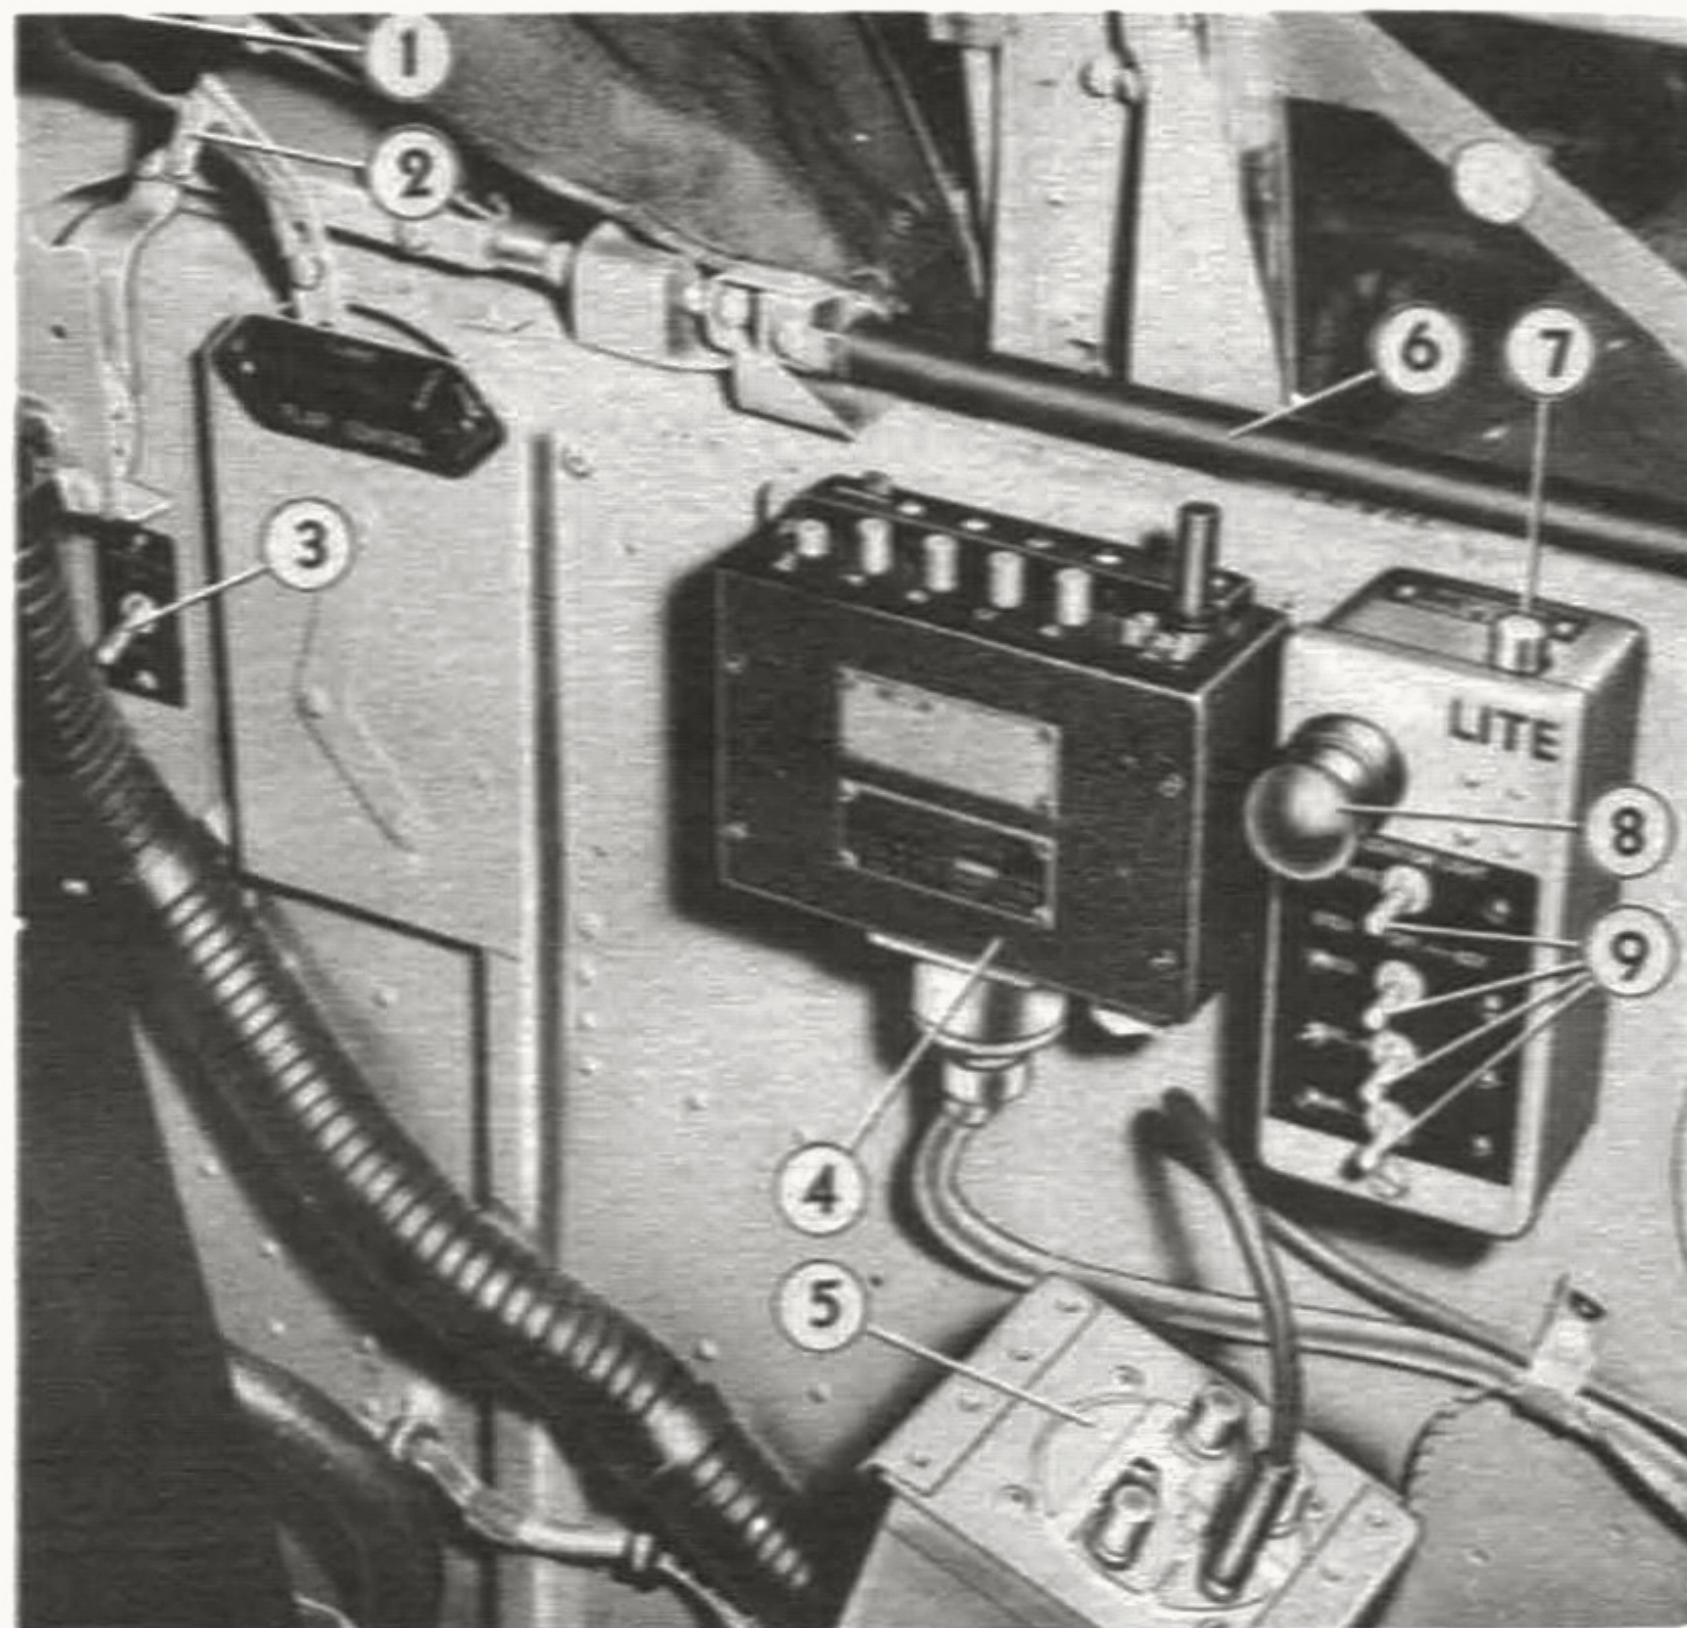


- 1.....FLAP CONTROL LEVER
- 2.....FLAP CONTROL LEVER TRIGGER
- 3.....INVERTER SWITCH
- 4.....SCR-522 RADIO CONTROLS
- 5.....RCA AVA-101
- 6.....SURFACE CONTROLS LOCK
- 7.....RECOGNITION LIGHTS KEYING SWITCH
- 8.....COCKPIT LIGHT
- 9..RECOGNITION LIGHTS SELECTOR SWITCHES

FIGURE 8—COCKPIT (RIGHT HAND)

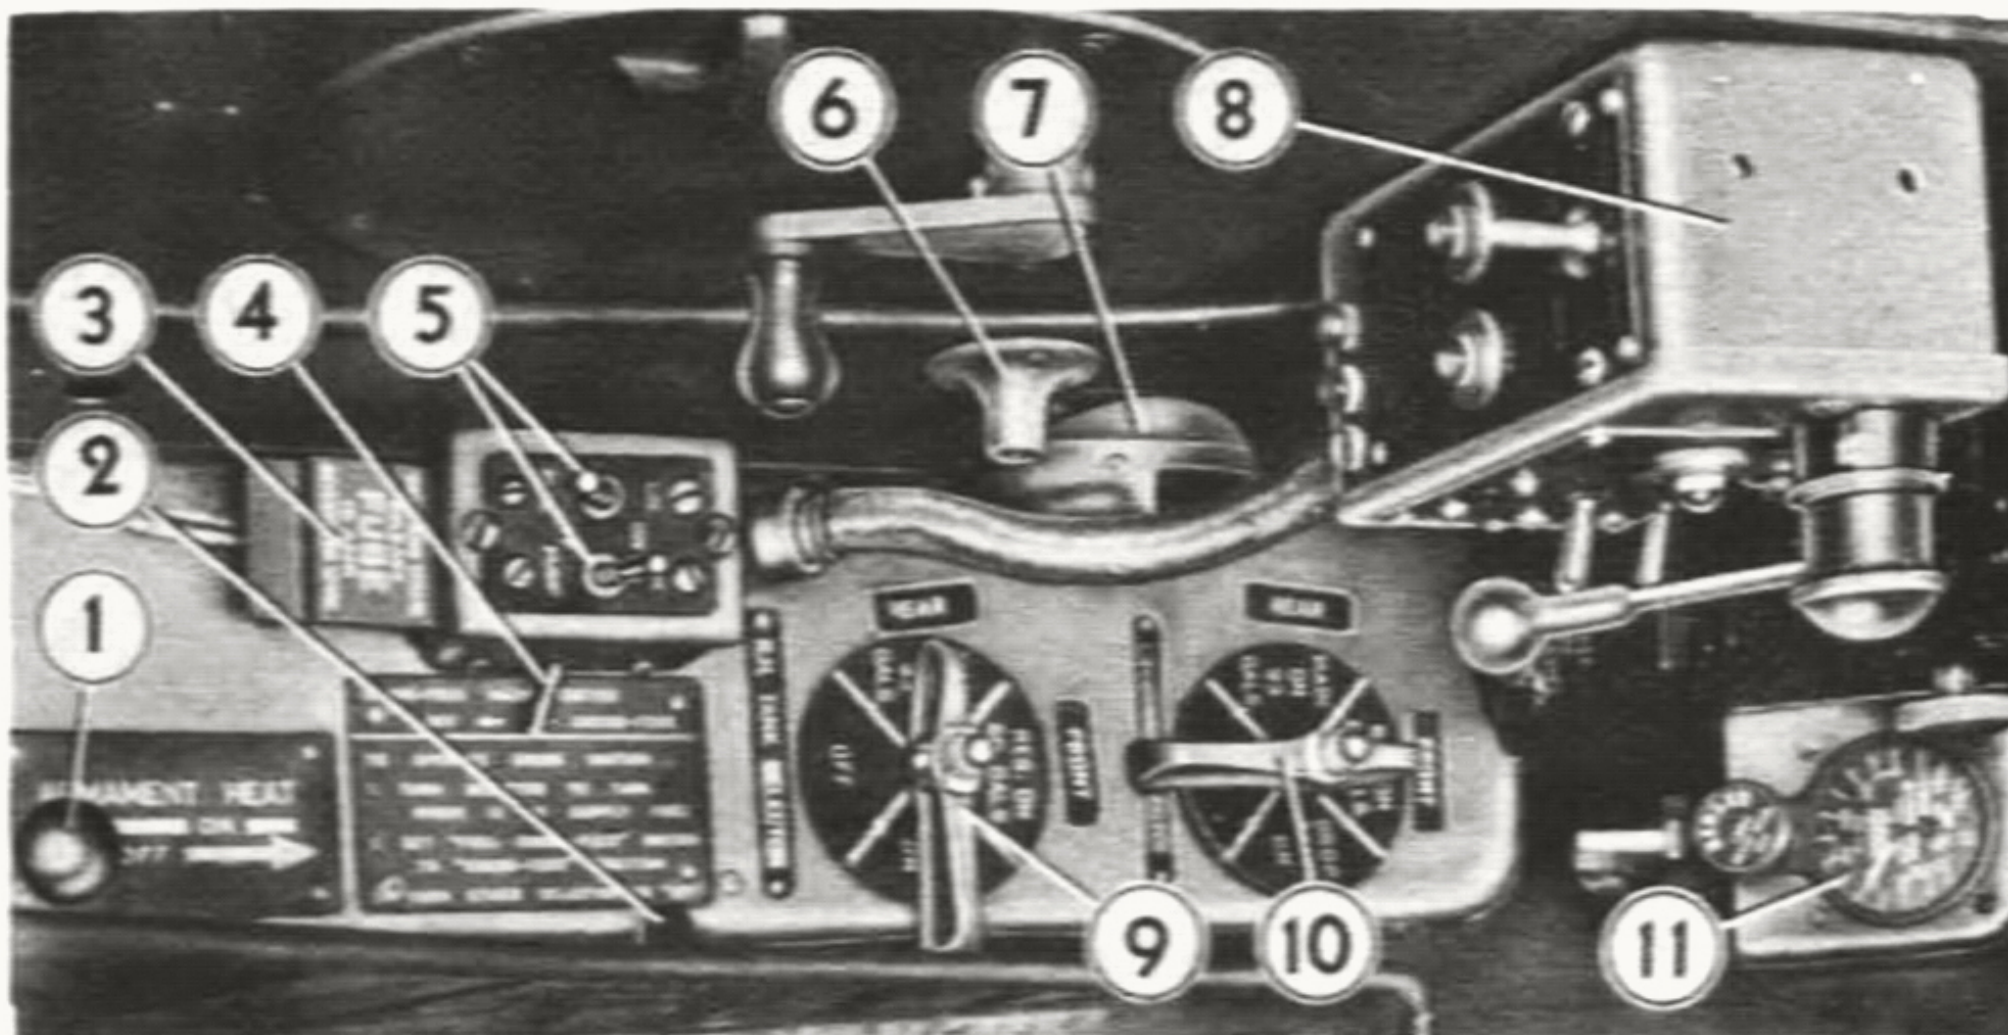


- 1... Armament Compartment Heat Control
- 2... Shoulder Harness Release
- 3... Tank or Bomb Fuse
- 4... Cross-feed Valve Switch
- 5... Fuel Boost Pump Switches
- 6... Alternate Mounting for Auxiliary Cockpit Swivel Light
- 7... Cockpit Ventilator
- 8... Tank and Bomb Switch Box
- 9... R.H. Tank Selector Valve
- 10... L.H. Tank Selector Valve
- 11... Oxygen Regulator

FIG. 9—COCKPIT (LEFT REAR)


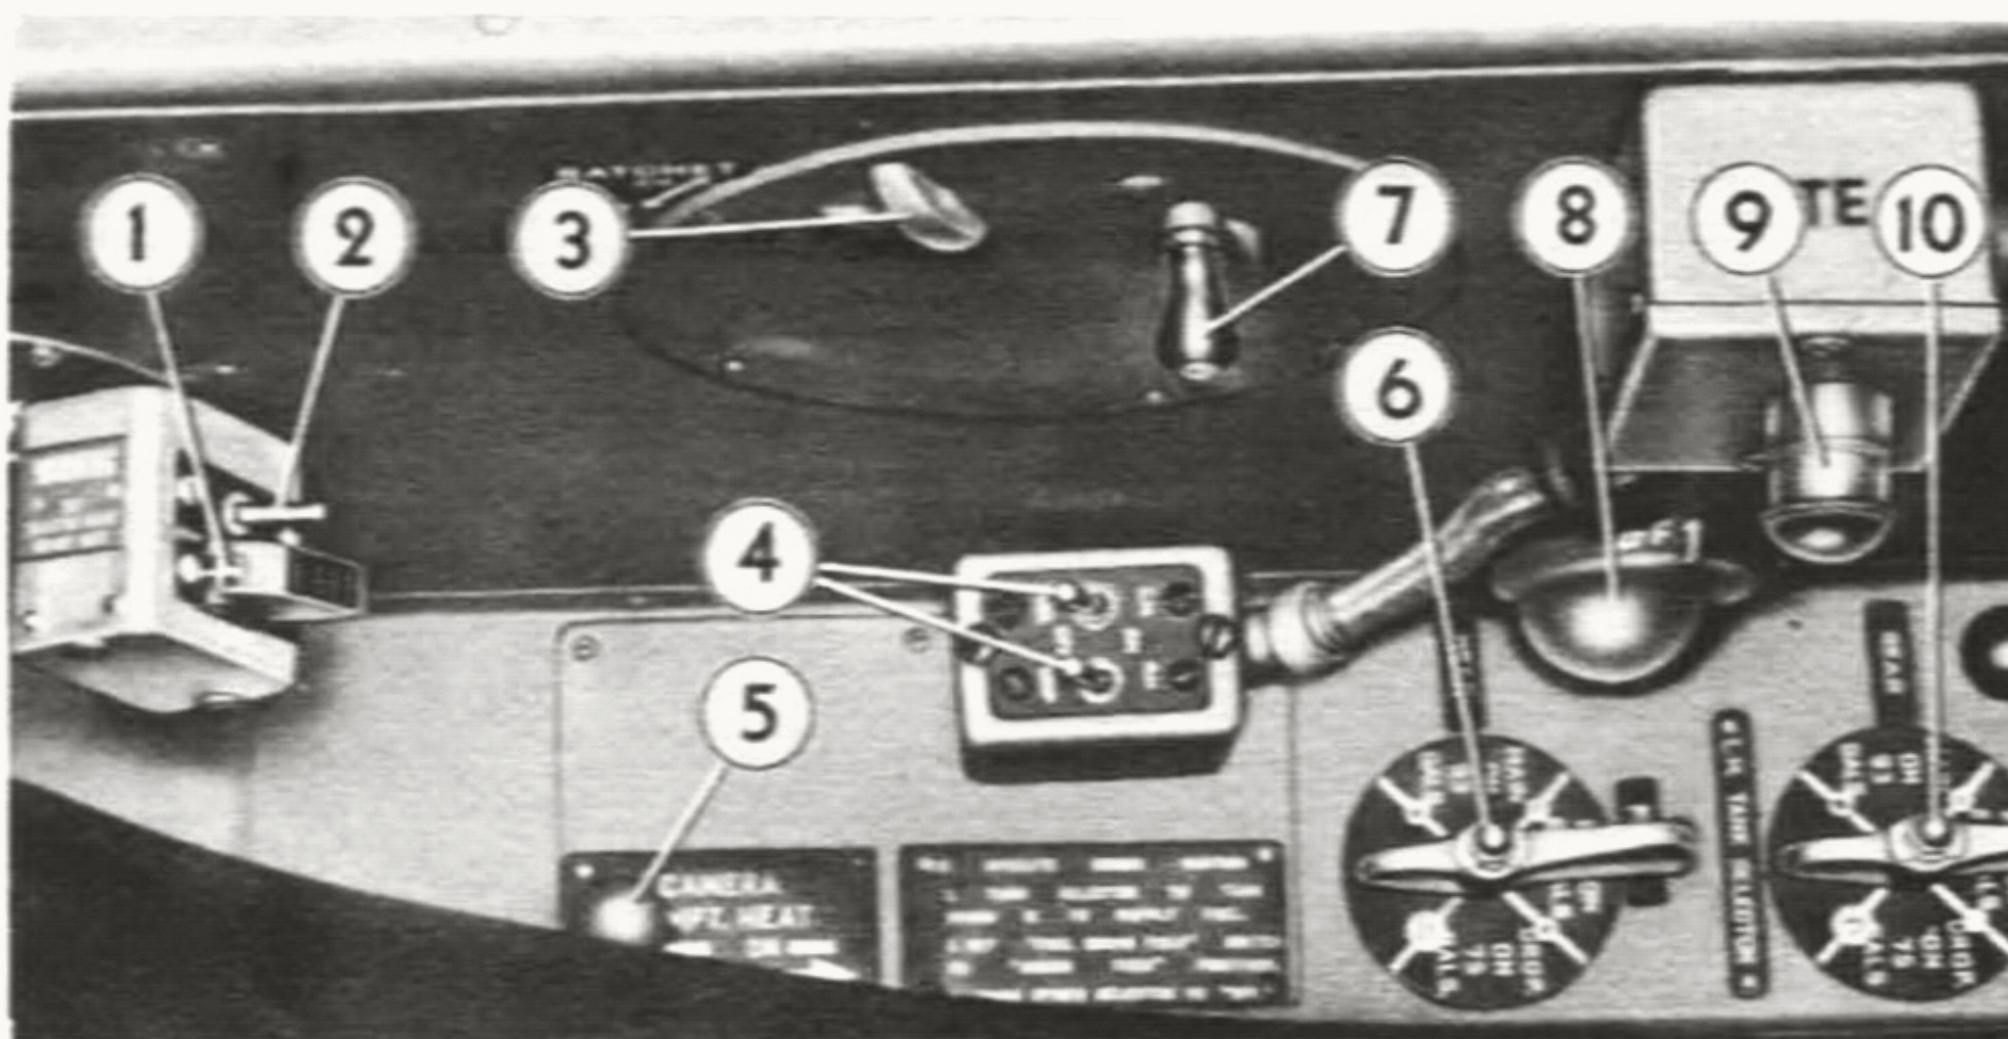


- 1... Tank Drop Switch—L.H.
- 2... Crossfeed Valve Switch—L.H.
- 3... Window Ratchet
- 4... Fuel Pump Switches
- 5... Camera Compartment Heat Control
- 6... R.H. Tank Selector Valve
- 7... Window Crank
- 8... Ventilator
- 9... Cockpit Light
- 10... L.H. Tank Selector Valve

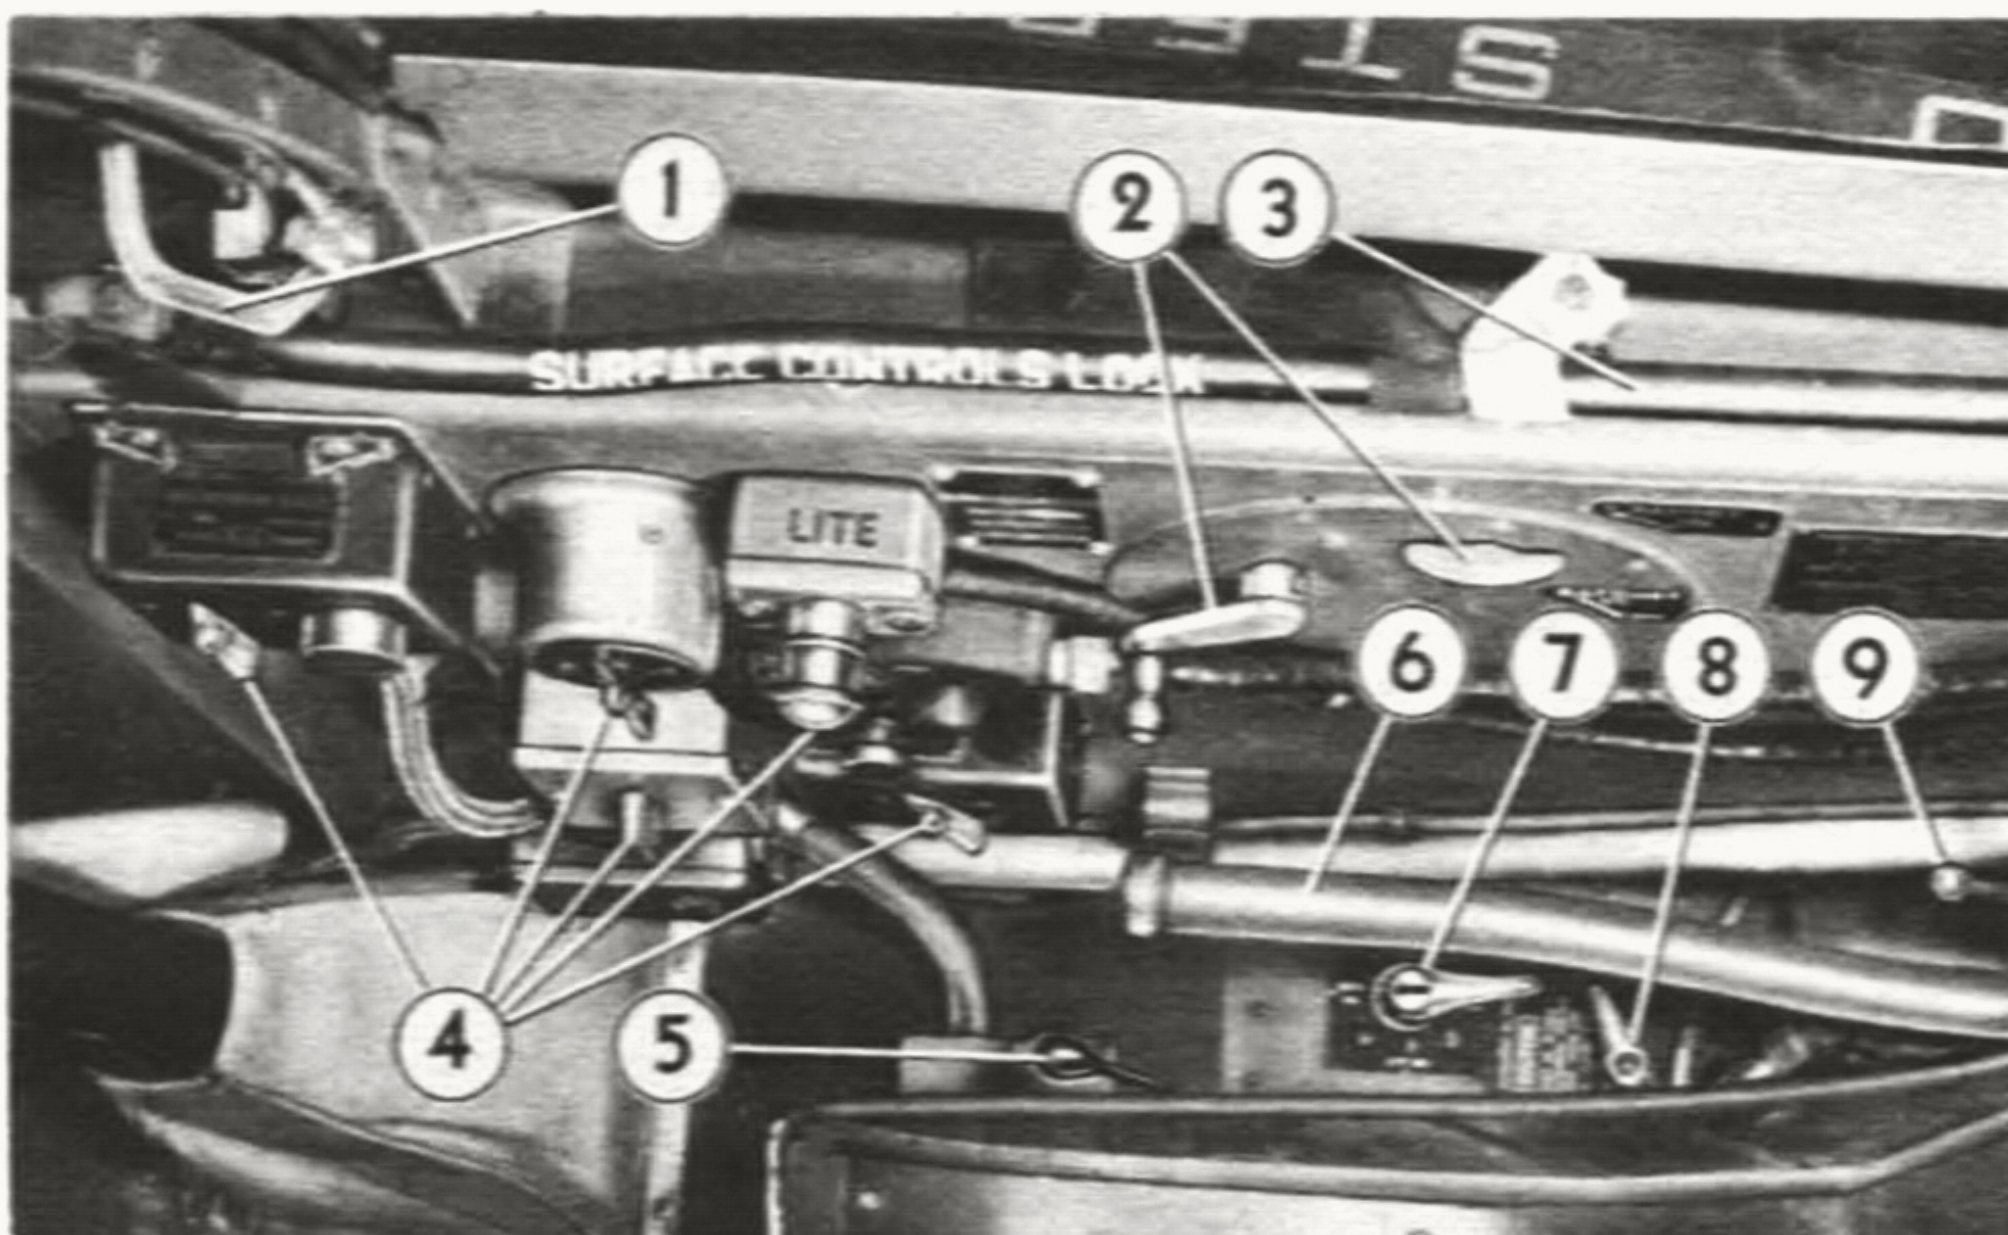FIG. 10—COCKPIT (LEFT REAR)
(F-4 CAMERA AIRPLANES)


- 1... Emergency Hatch Release
- 2... Window Controls
- 3... Surface Controls Lock—Stowed
- 4... SCR-283 Radio Controls
- 5... Seat Adjustment Lever
- 6... Hand Hydraulic Pump
- 7... Vacuum Pump Selector
- 8... By-pass Valve
- 9... Oil Source Selector Valve Lever

FIG. 11—COCKPIT (RIGHT REAR)

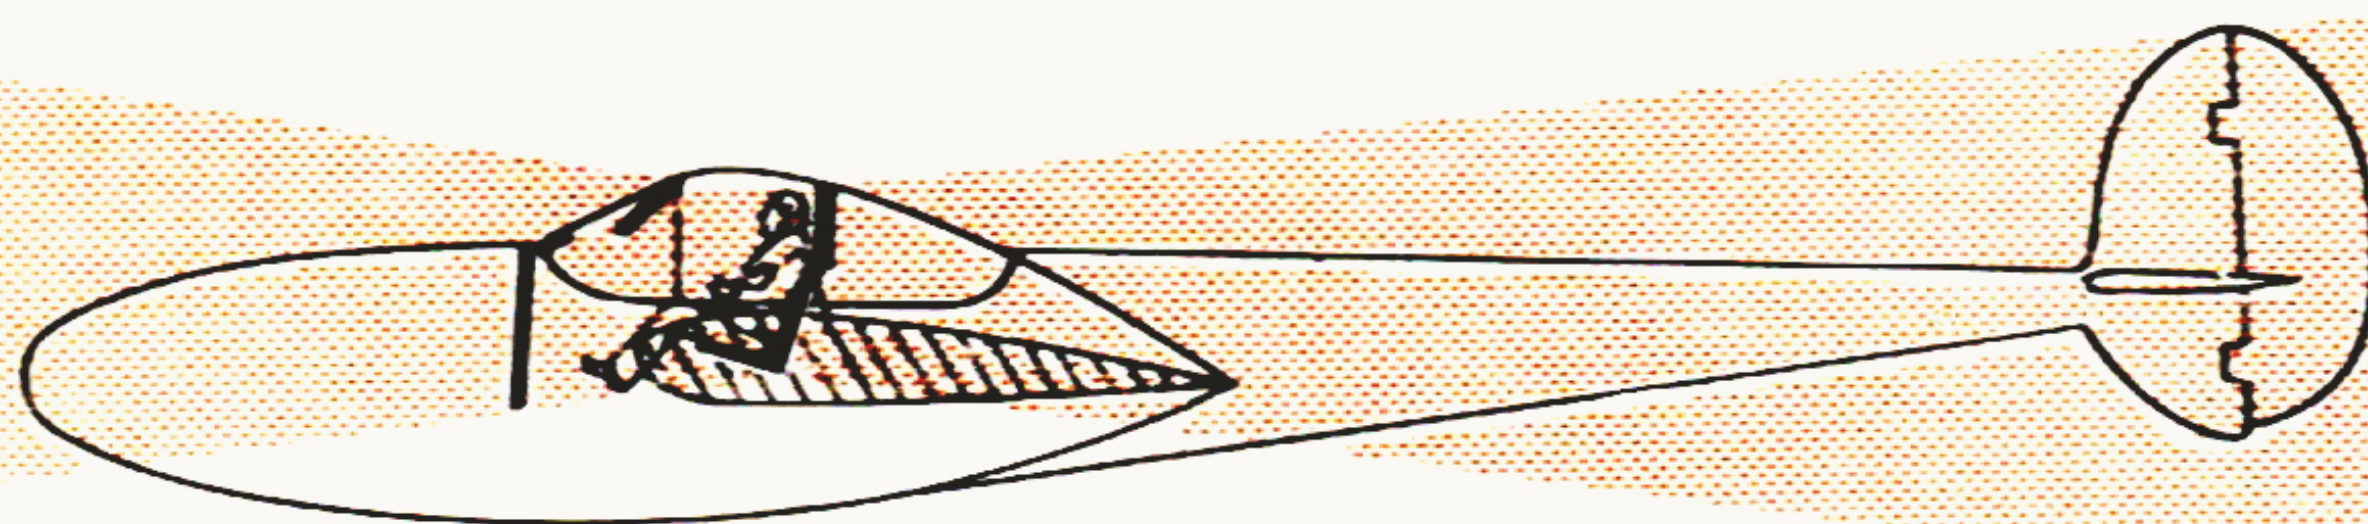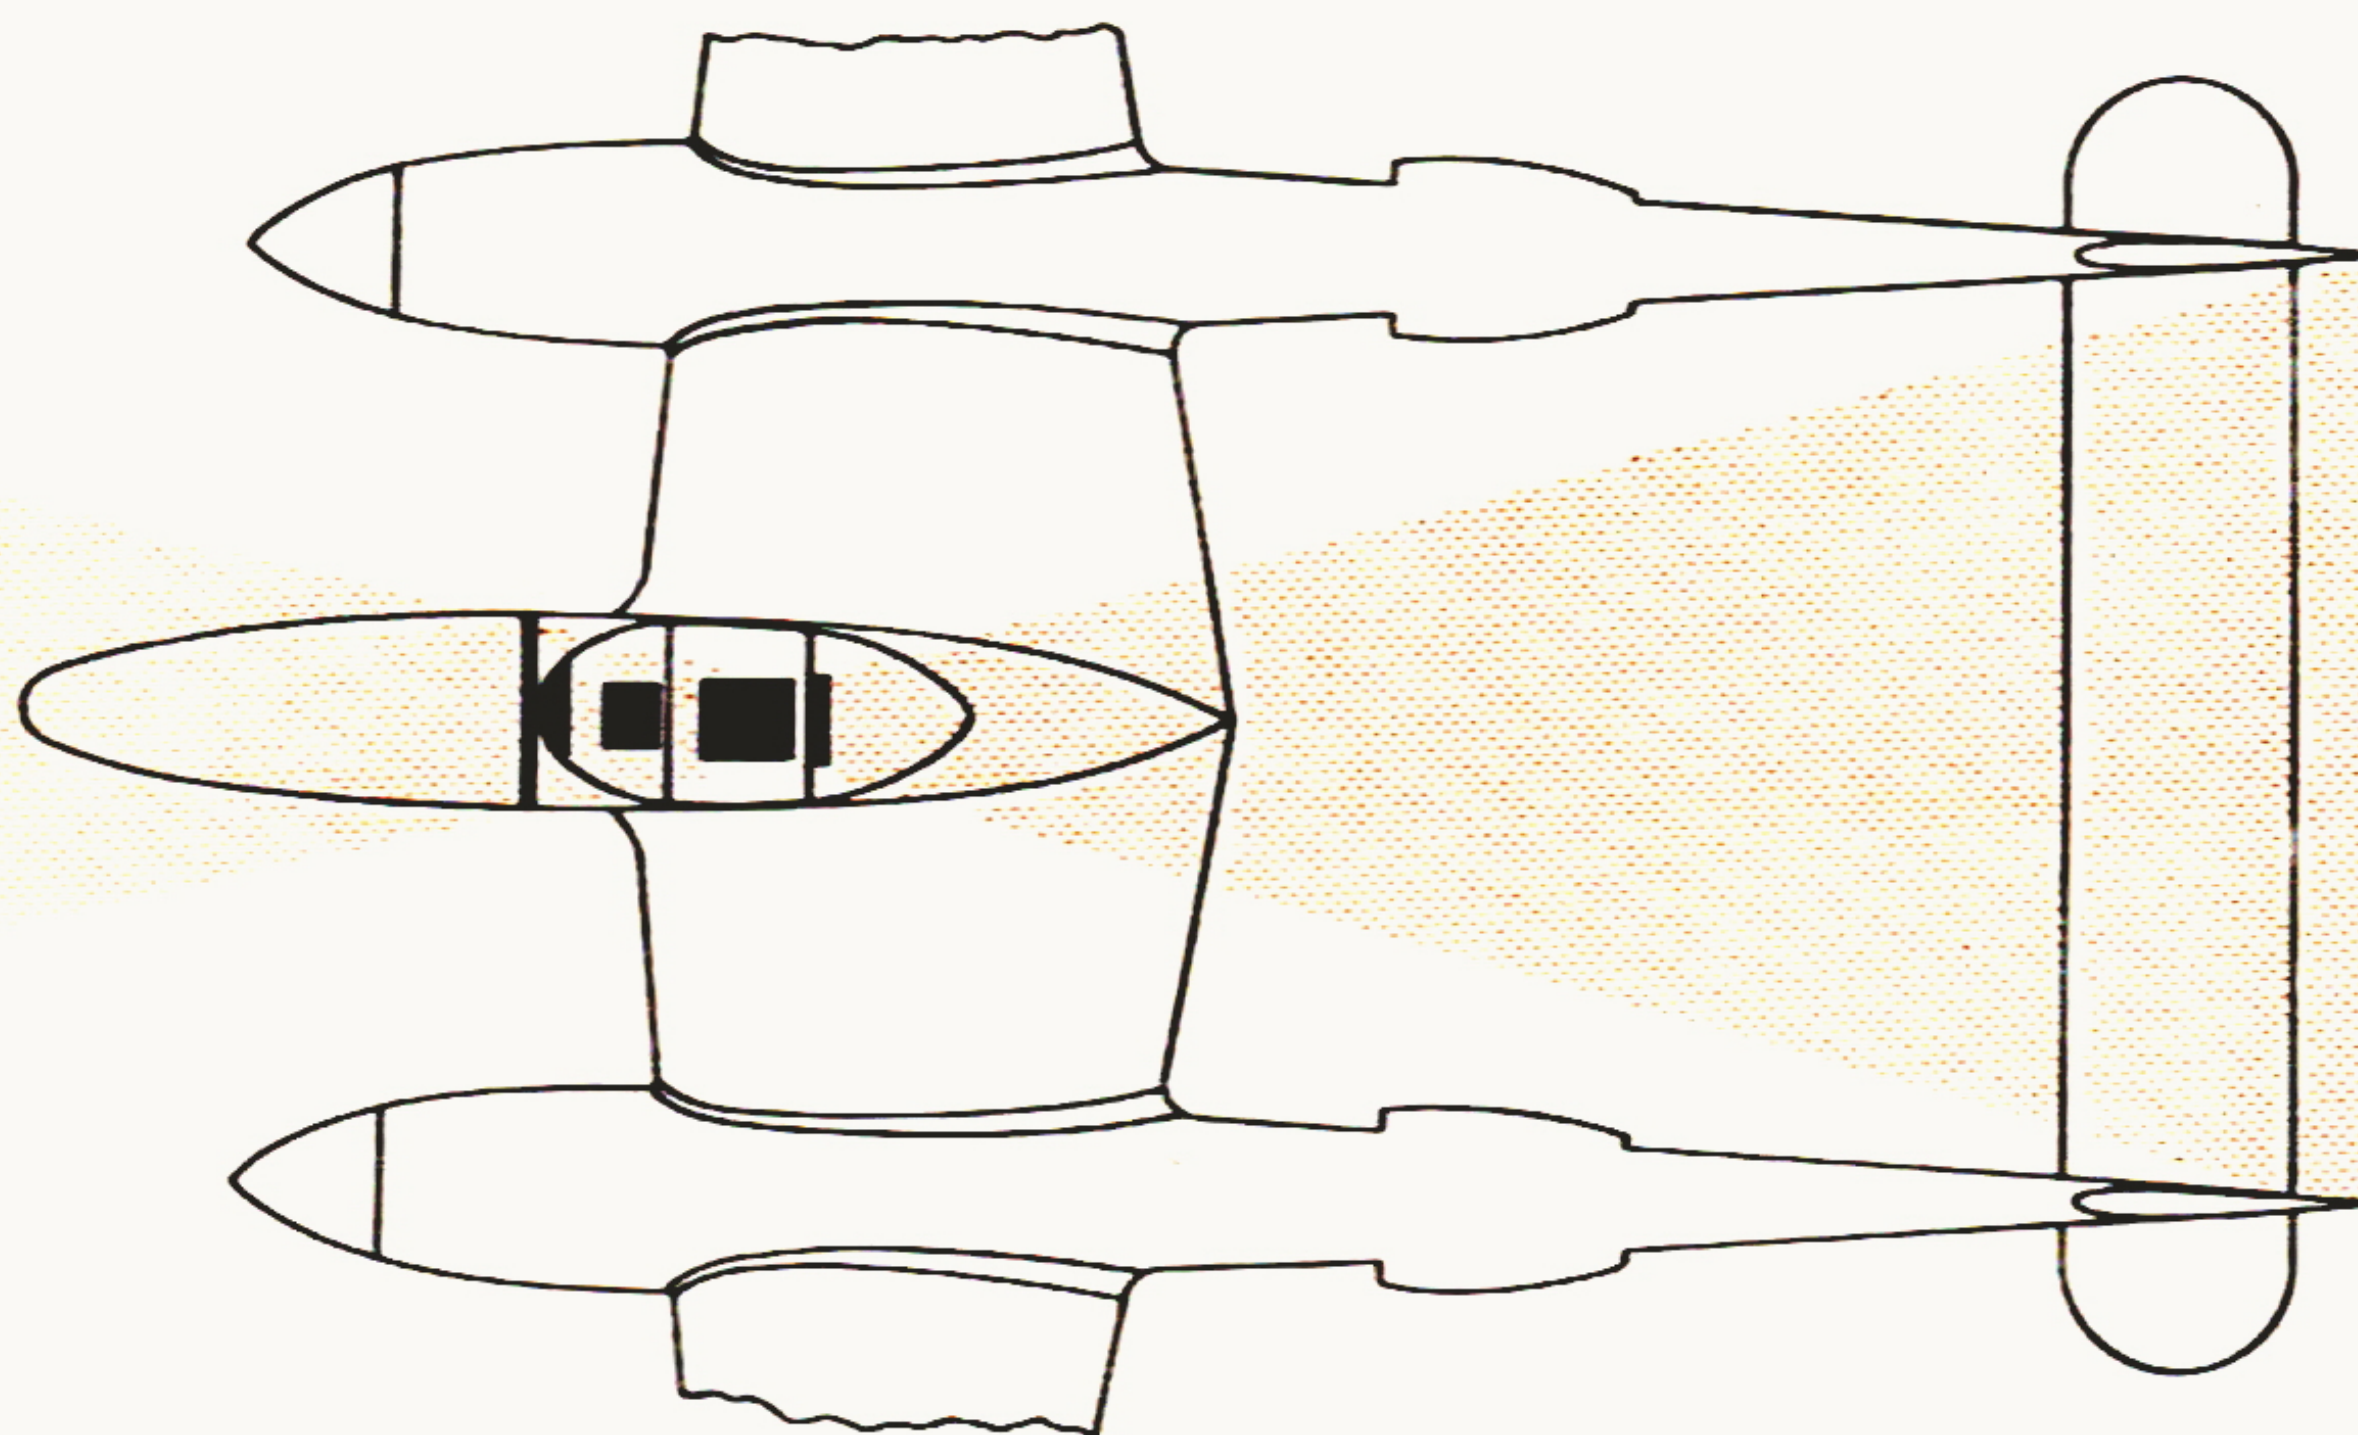

ARMOR PROTECTS PILOT FROM MACHINE GUN FIRE WITHIN SHADED AREA


FIGURE 12—ARMOR DIAGRAM

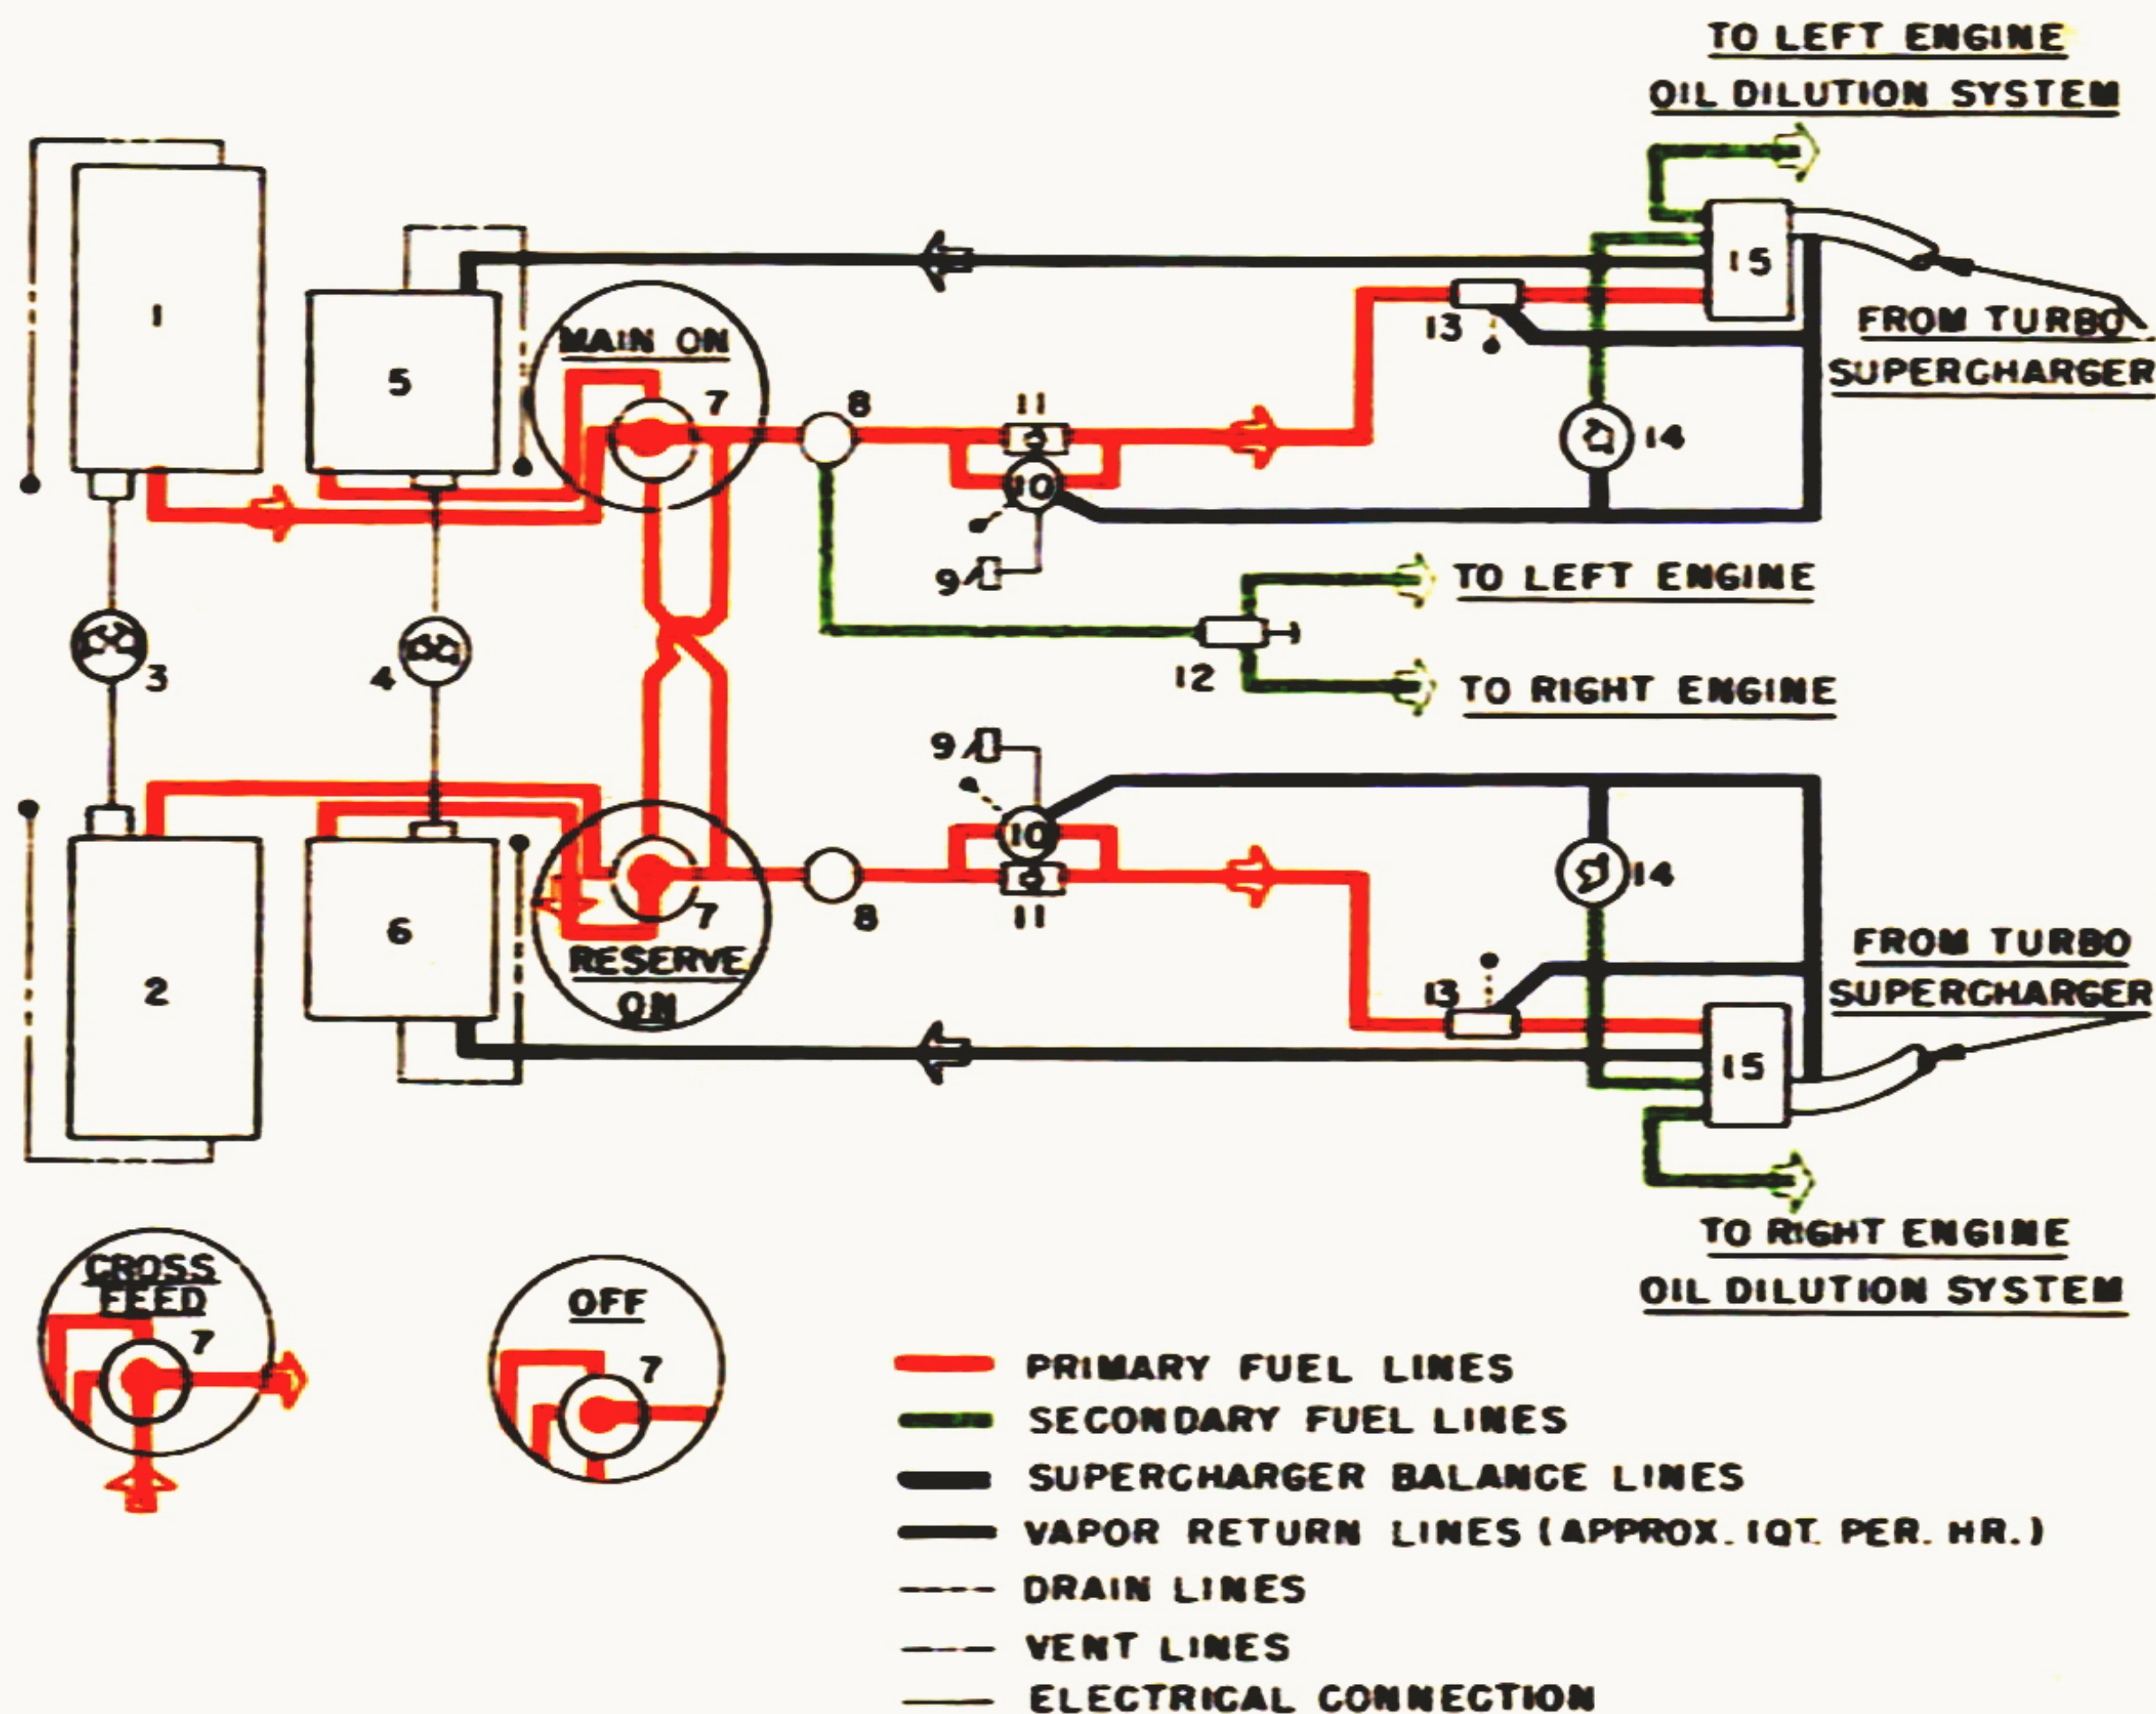

- 1 LEFT MAIN TANK—93 U.S. GAL., 77 IMP. GAL.
- 2 RIGHT MAIN TANK—93 U.S. GAL., 77 IMP. GAL.
- 3 REAR TANKS QUANTITY GAGE
- 4 FRONT TANKS QUANTITY GAGE
- 5 LEFT RESERVE TANK—60 U.S. GAL., 50 IMP. GAL.
- 6 RIGHT RESERVE TANK—60 U.S. GAL., 50 IMP. GAL.
- 7 TANK SELECTOR VALVE
- 8 FUEL STRAINER

- 9 ELECTRIC FUEL PUMP SWITCH
- 10 ELECTRIC FUEL PUMP
- 11 CHECK VALVE
- 12 PRIMER
- 13 ENGINE FUEL PUMP
- 14 FUEL PRESSURE GAGE
- 15 CARBURETOR


FIGURE 13—FUEL SYSTEM—P-38-D

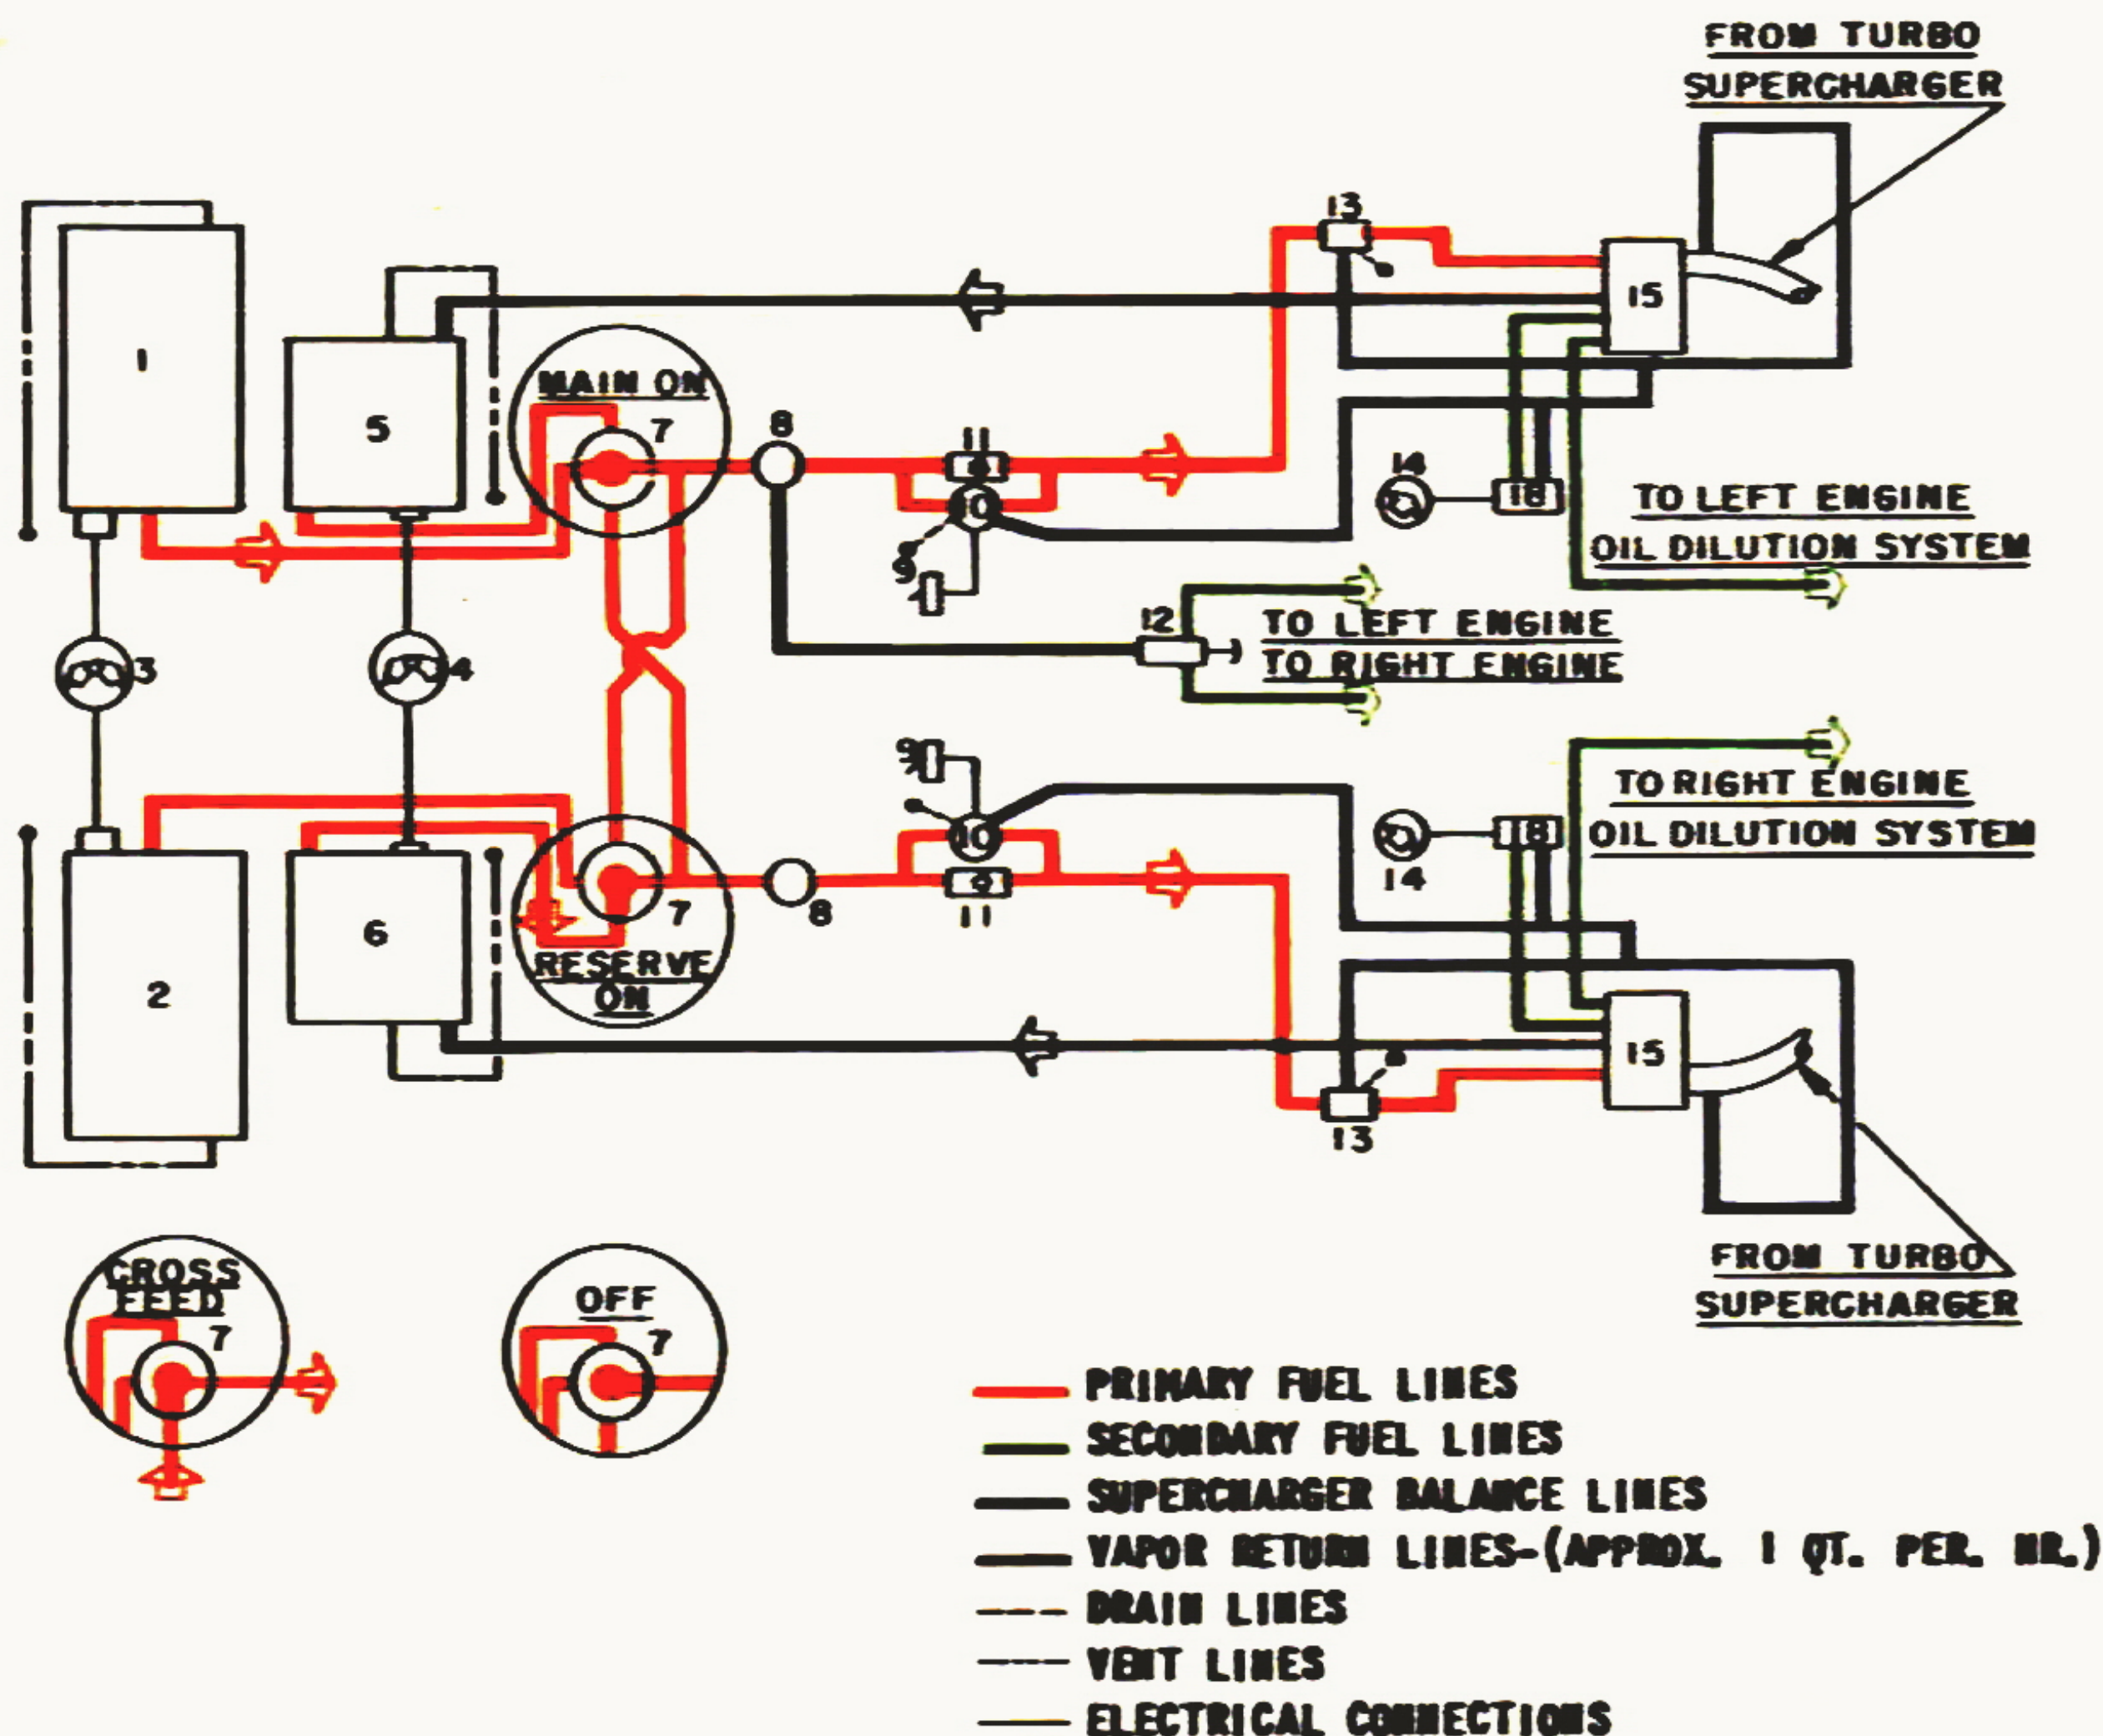

- 1 LEFT MAIN TANK-93 U.S. GAL., 77 IMP. GAL.
- 2 RIGHT MAIN TANK-93 U.S. GAL., 77 IMP. GAL.
- 3 REAR TANKS QUANTITY GAGE
- 4 FRONT TANKS QUANTITY GAGE
- 5 LEFT RESERVE TANK-60 U.S. GAL., 50 IMP. GAL.
- 6 RIGHT RESERVE TANK-60 U.S. GAL., 50 IMP. GAL.
- 7 TANK SELECTOR VALVE
- 8 FUEL STRAINER
- 9 ELECTRIC FUEL PUMP SWITCH
- 10 ELECTRIC FUEL PUMP

- 11 CHECK VALVE
- 12 PRIMER
- 13 ENGINE FUEL PUMP
- 14 FUEL PRESSURE GAGE
- 15 CARBURETOR
- 16 DELETED
- 17 DELETED
- 18 FUEL PRESSURE TRANSMITTER
- 19 DELETED
- 20 DELETED


FIGURE 14—FUEL SYSTEM—RP-38E, P-38F

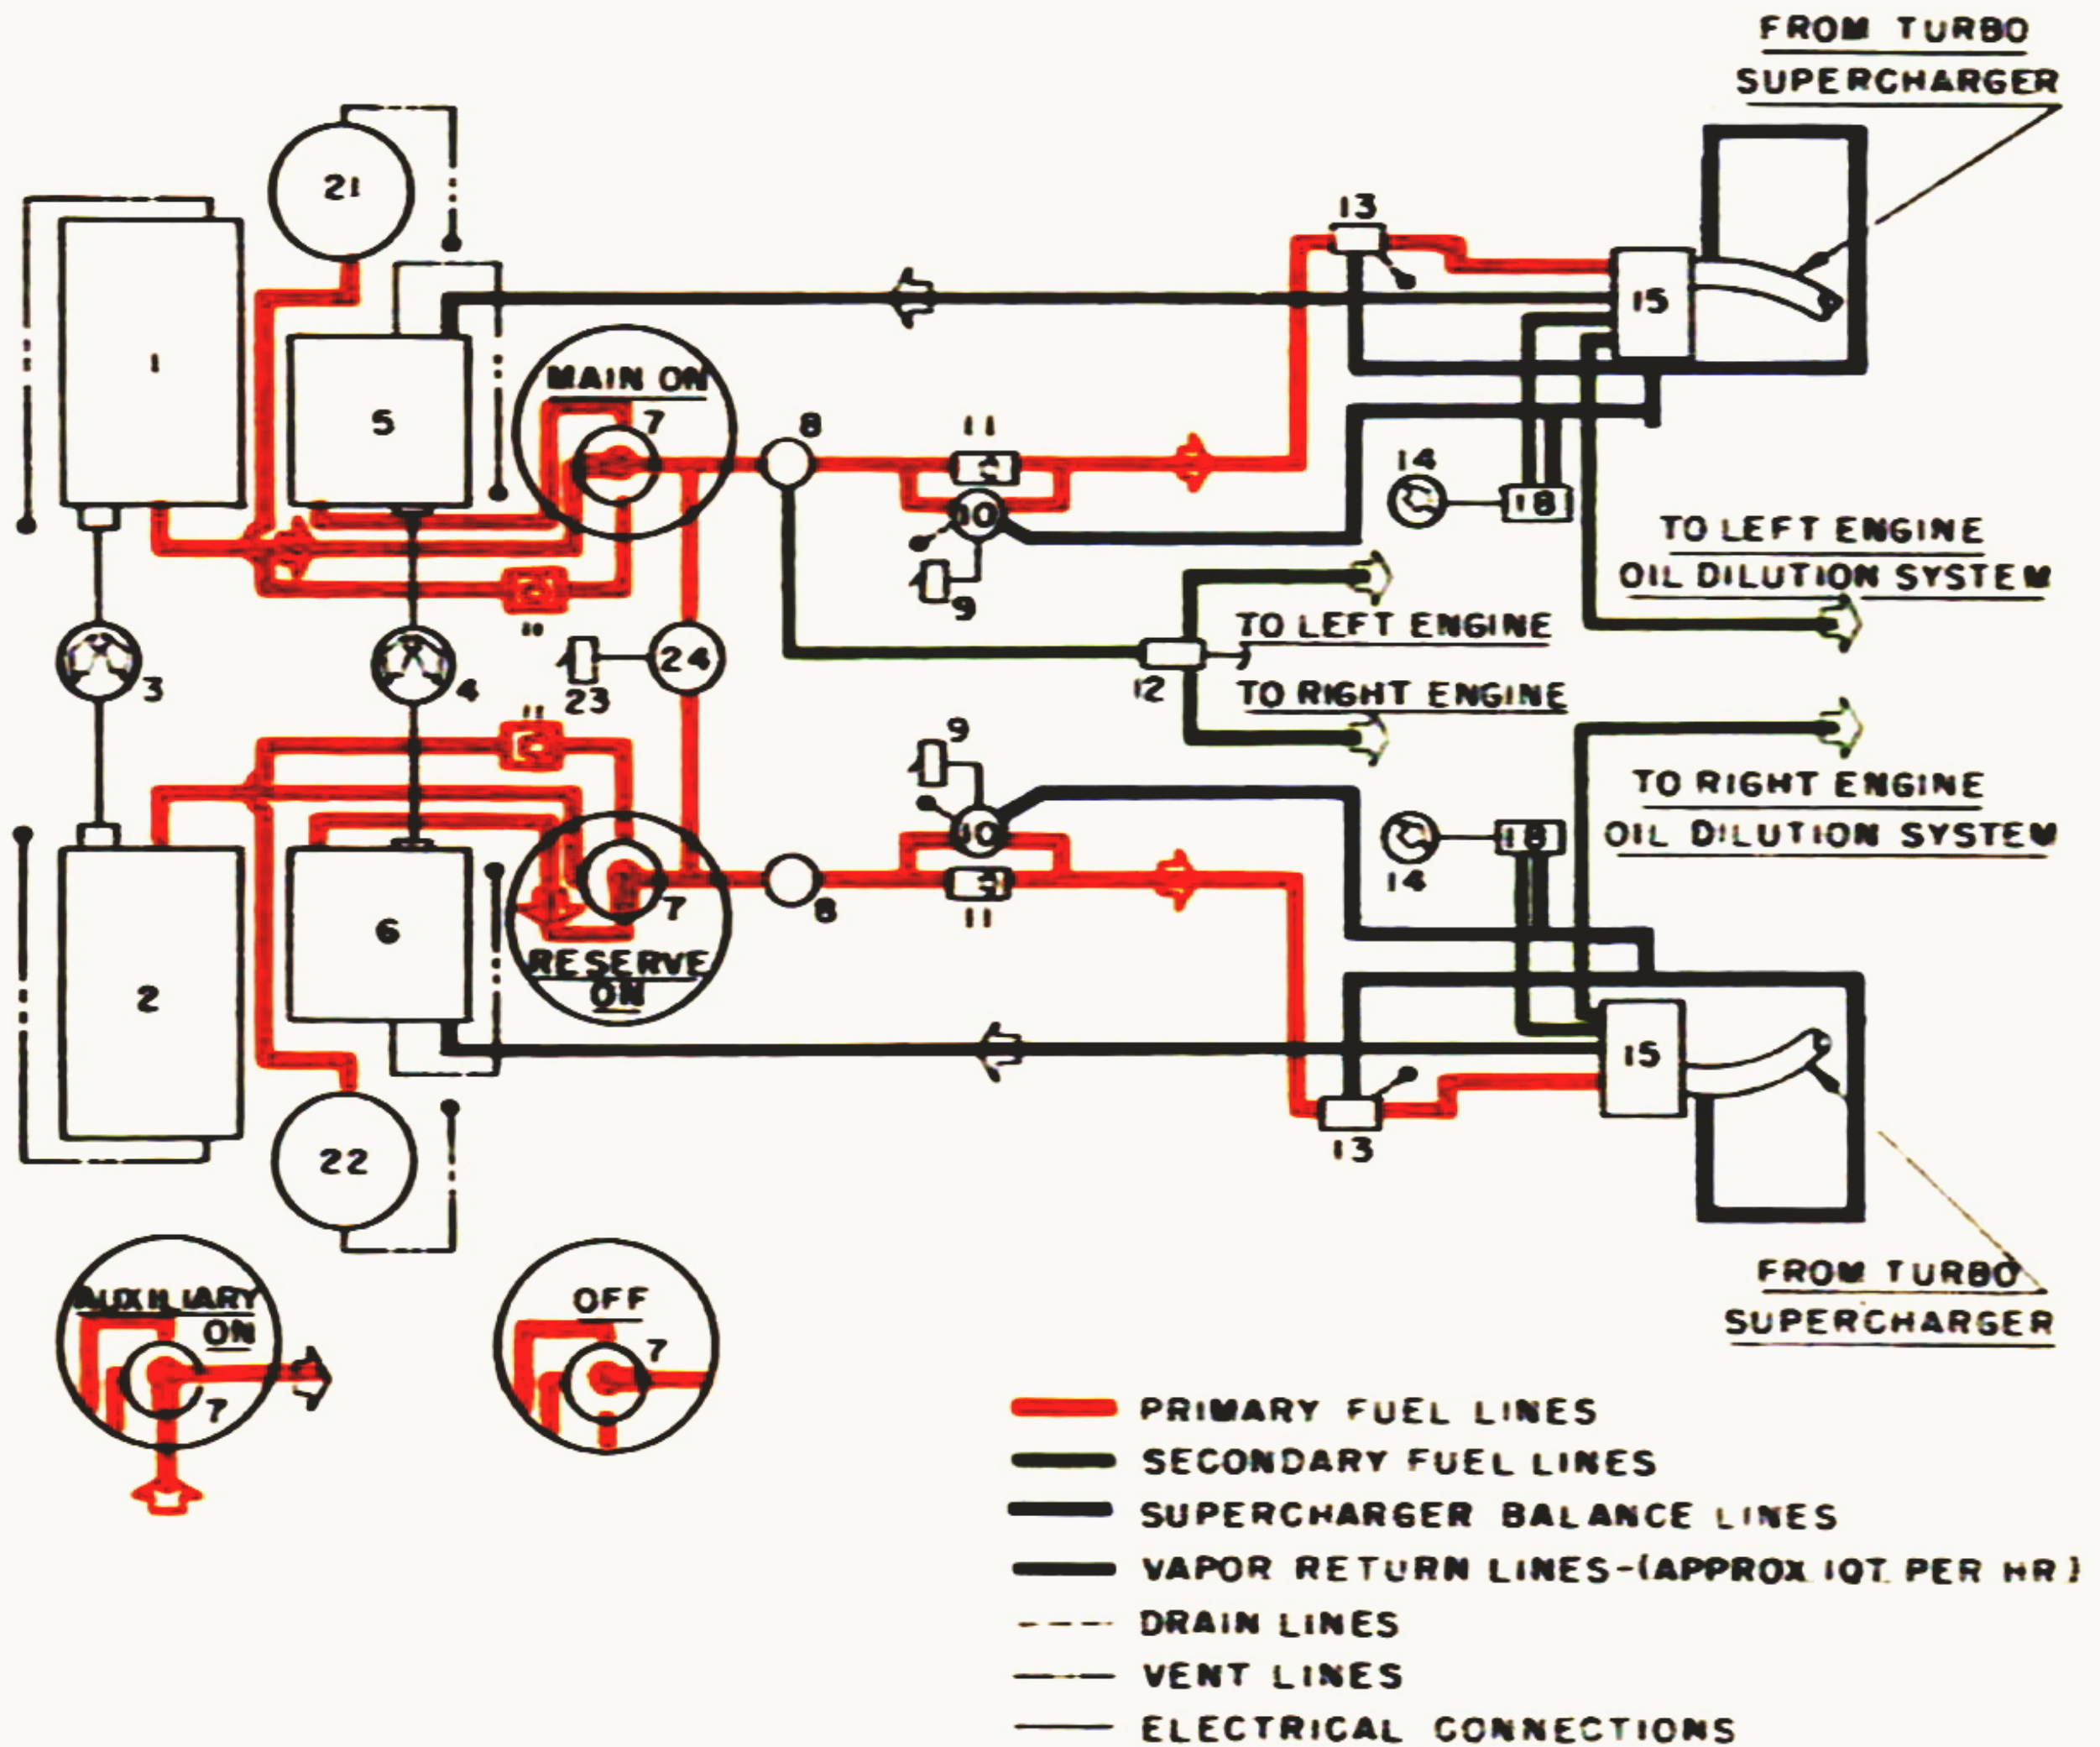

- 1 LEFT MAIN TANK—93 U. S. GAL, 77 IMP. GAL
- 2 RIGHT MAIN TANK—93 U. S. GAL, 77 IMP. GAL
- 3 REAR TANKS QUANTITY GAGE
- 4 FRONT TANKS QUANTITY GAGE
- 5 LEFT RESERVE TANK—40 U. S. GAL, 50 IMP. GAL
- 6 RIGHT RESERVE TANK—40 U. S. GAL, 50 IMP. GAL
- 7 TANK SELECTOR VALVE
- 8 FUEL STRAINER
- 9 ELECTRIC FUEL PUMP SWITCH
- 10 ELECTRIC FUEL PUMP
- 11 CHECK VALVE
- 12 PRIMER

- 13 ENGINE FUEL PUMP
- 14 FUEL PRESSURE GAGE
- 15 CARBURETOR
- 16 DELETED
- 17 DELETED
- 18 FUEL PRESSURE TRANSMITTER
- 19 DELETED
- 20 DELETED
- 21 LEFT AUXILIARY TANK
- 22 RIGHT AUXILIARY TANK
- 23 CROSS SUCTION SOLENOID
- 24 CROSS SUCTION VALVE

FIGURE 15—FUEL SYSTEM—AIRPLANES WITH DROPPABLE TANKS

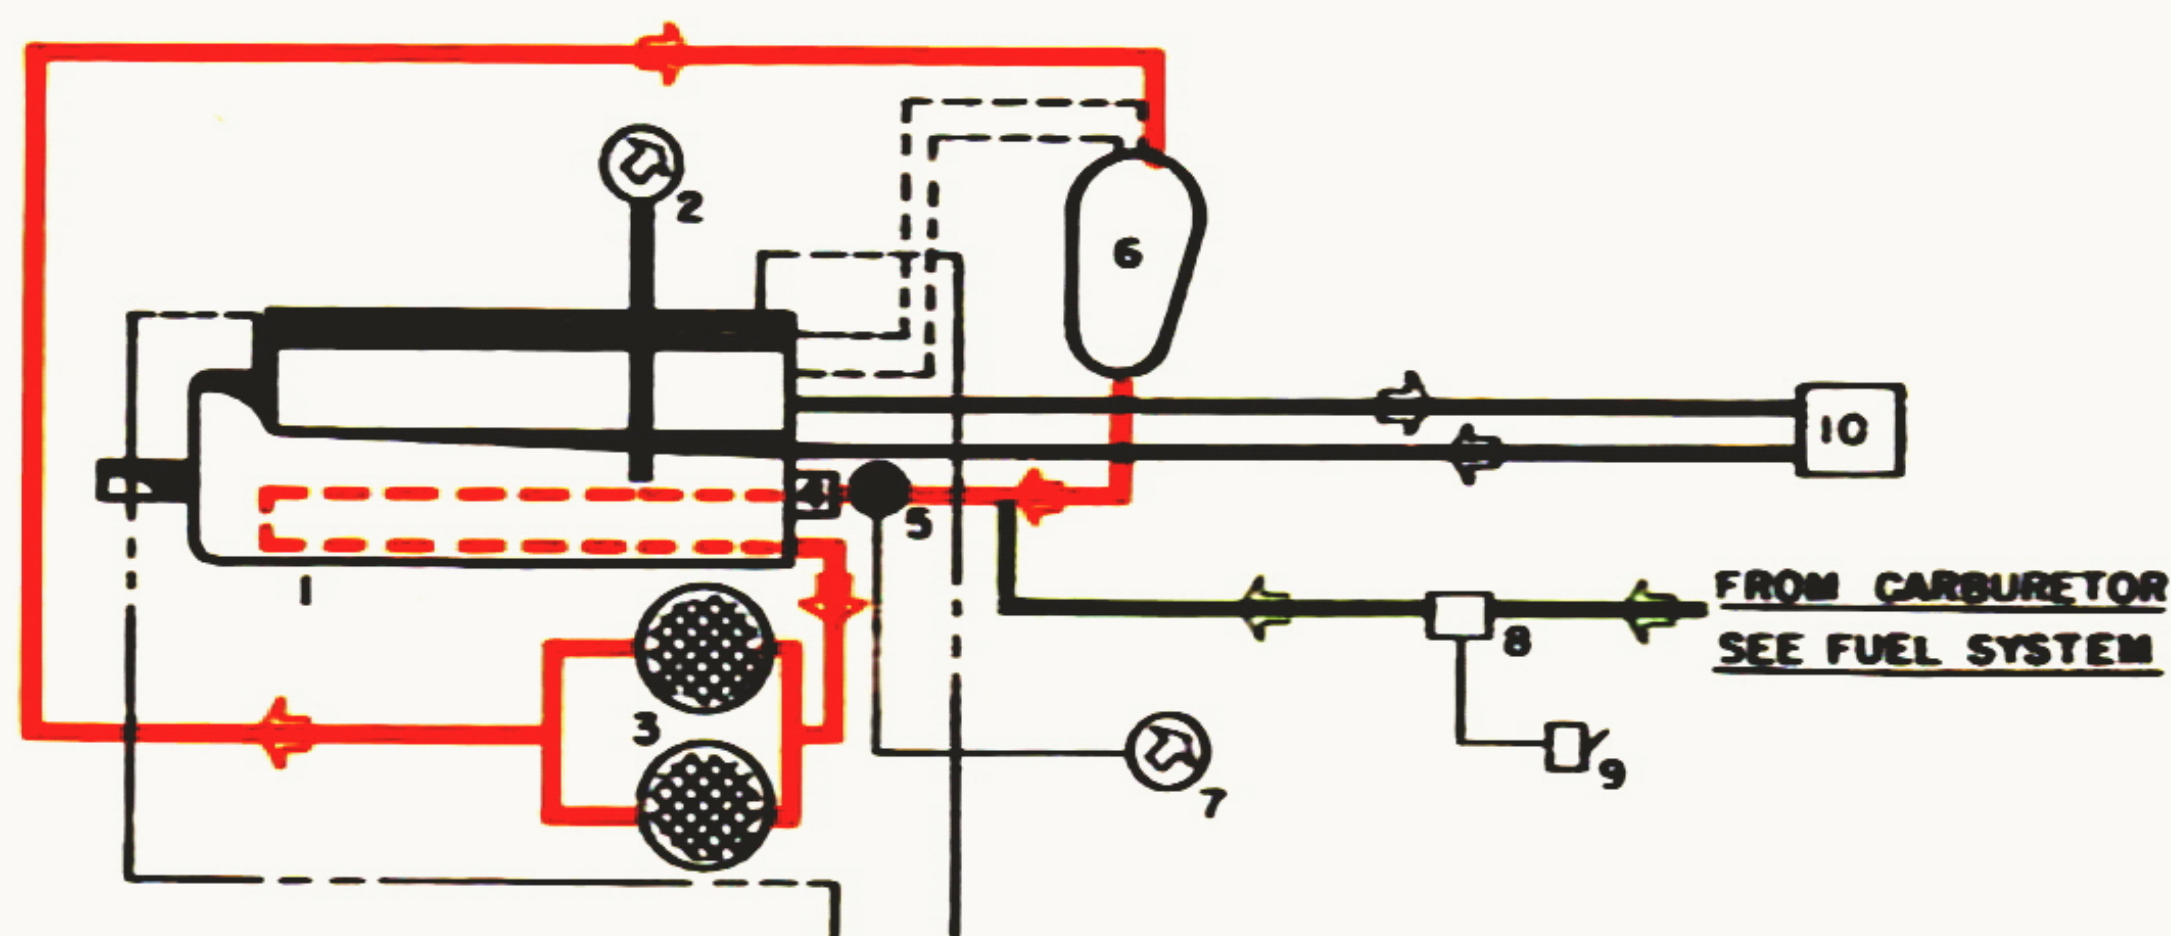


- PRIMARY ENGINE OIL SYSTEM
- OIL DILUTION SYSTEM
- OIL PRESSURE INDICATOR LINE
- TURBO SUPERCHARGER REGULATOR OIL SUPPLY AND RETURN LINES
- VENT LINE
- ELECTRICAL CONNECTION
- BREATHER LINE

- 1 ENGINE
- 2 OIL PRESSURE INDICATOR
- 3 OIL RADIATORS
- 4 ENGINE OIL PUMP
- 5 OIL TEMPERATURE BULB

- 6 OIL RESERVOIR - 13 U.S. GAL., 11 IMP. GAL.
- 7 OIL TEMPERATURE INDICATOR
- 8 OIL DILUTION PUMP
- 9 OIL DILUTION PUMP SWITCH
- 10 TURBO SUPERCHARGER REGULATOR

FIGURE 16—OIL SYSTEM

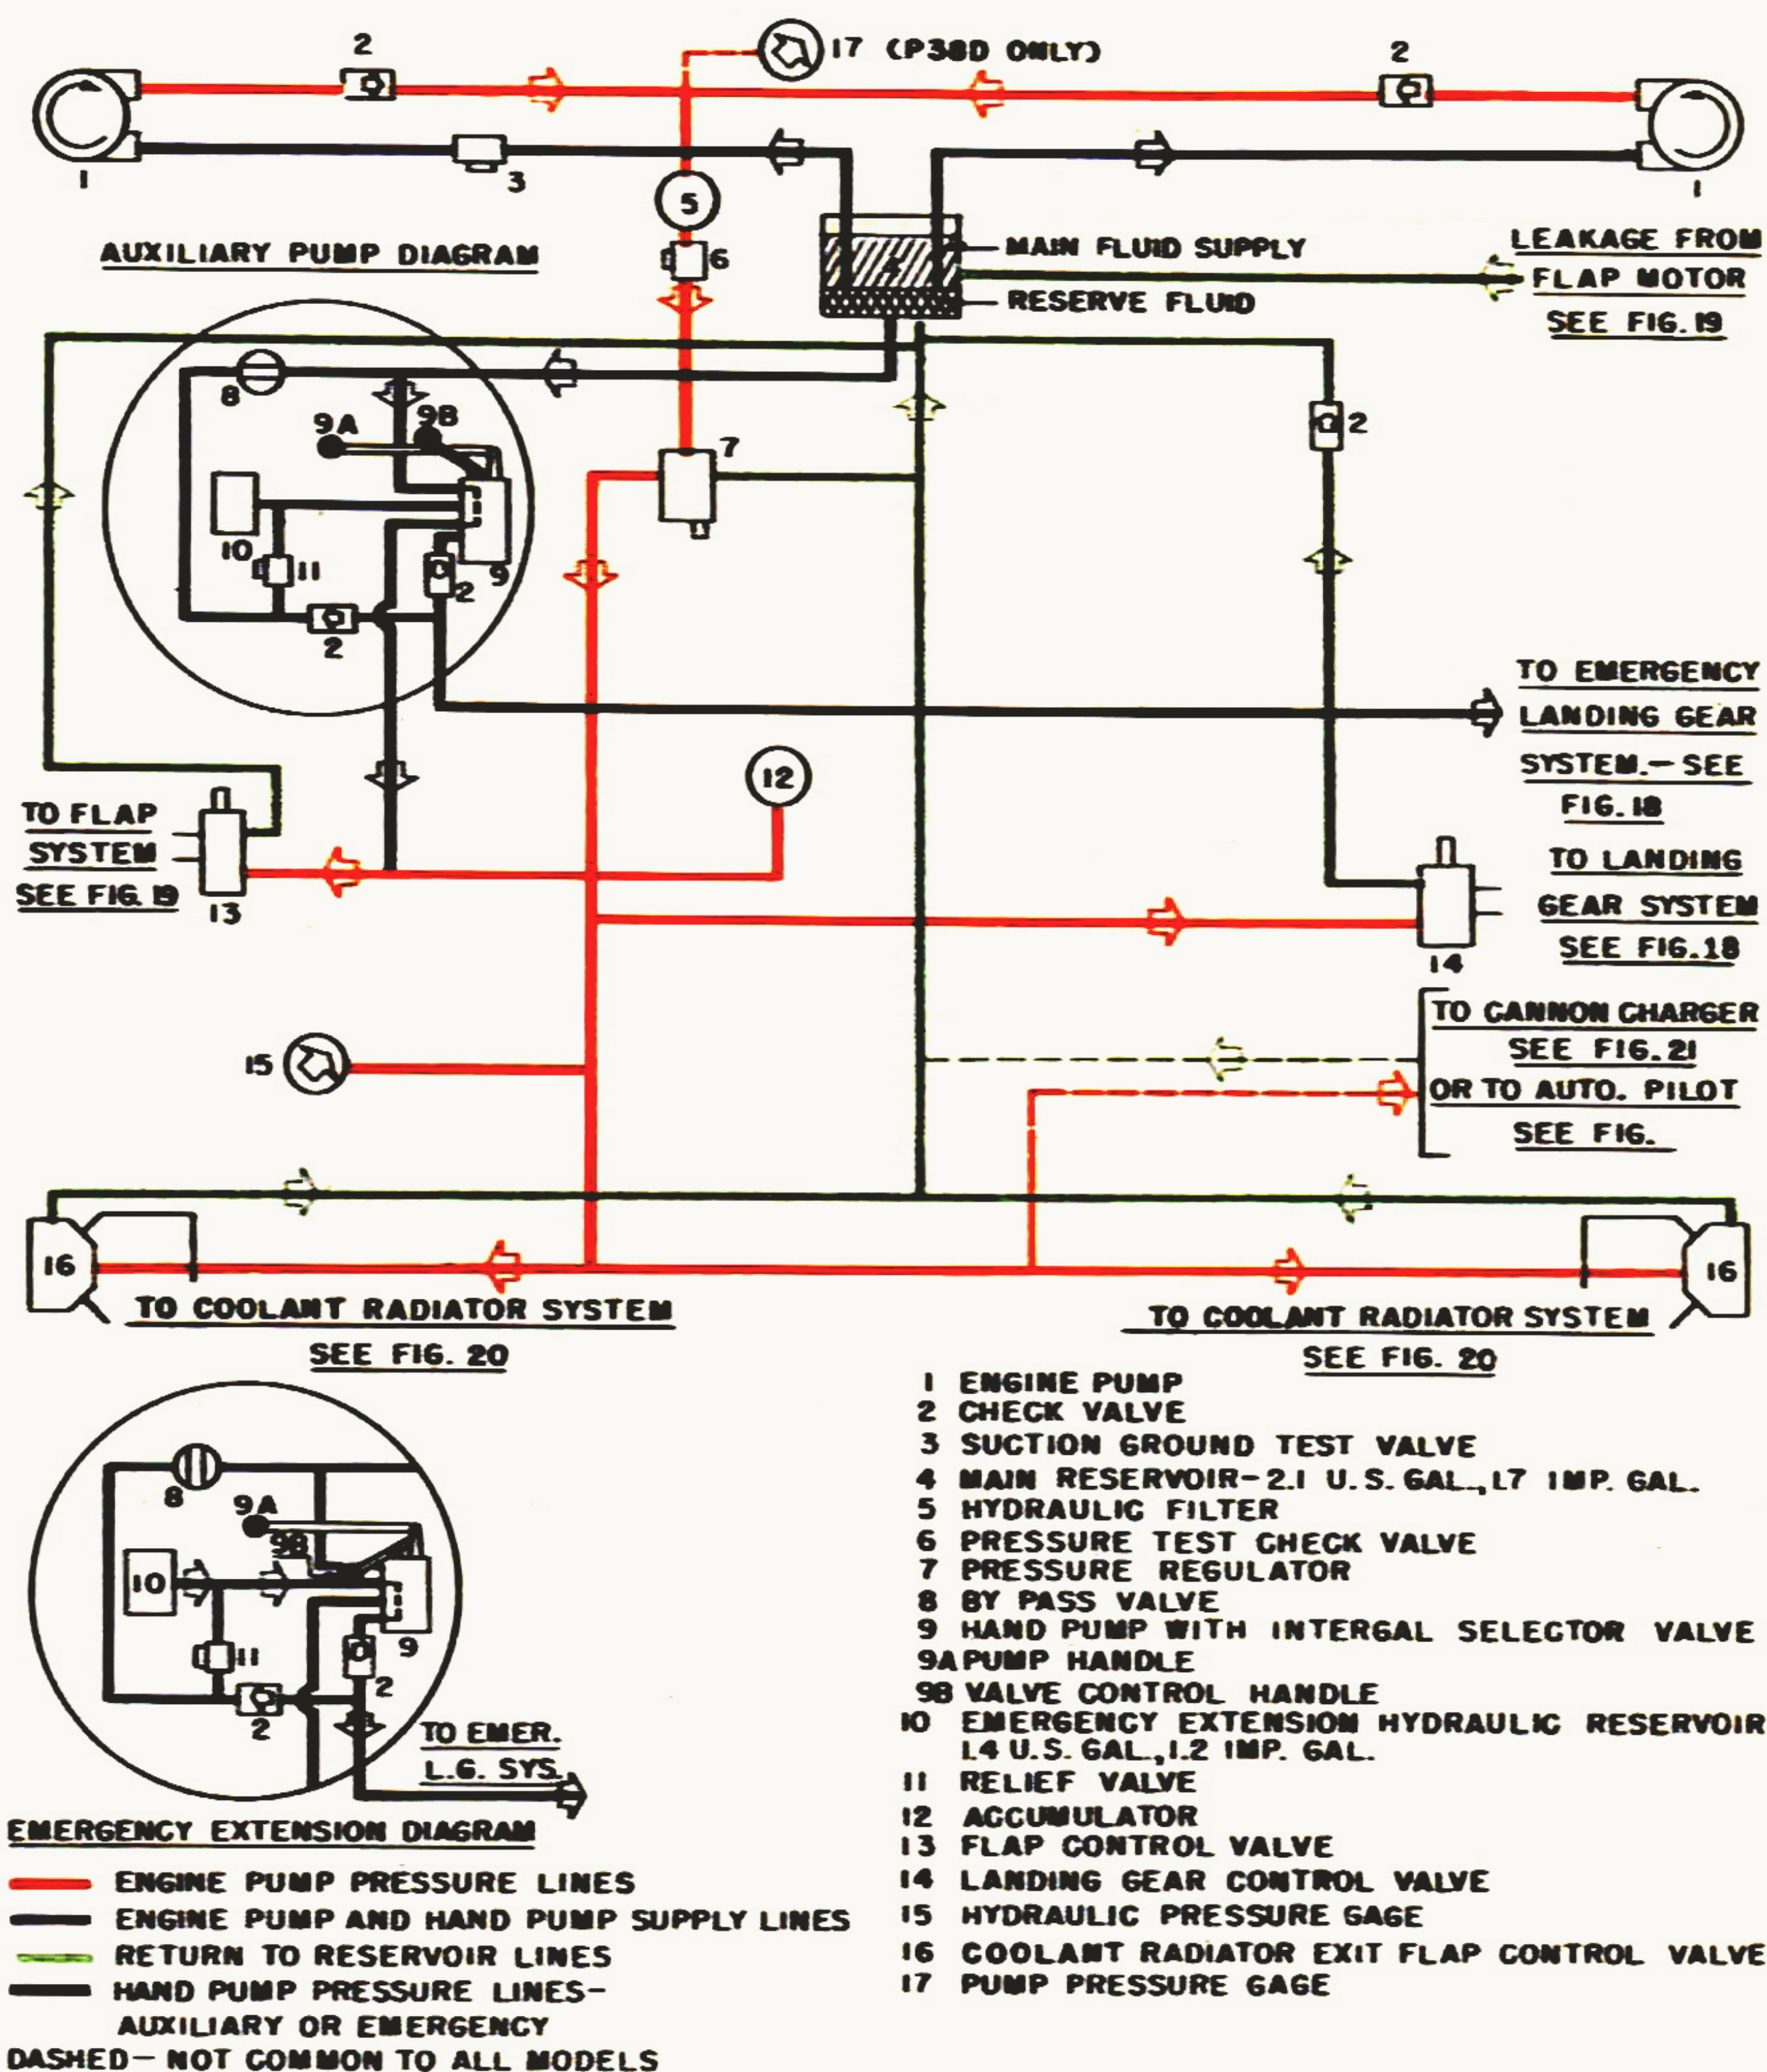

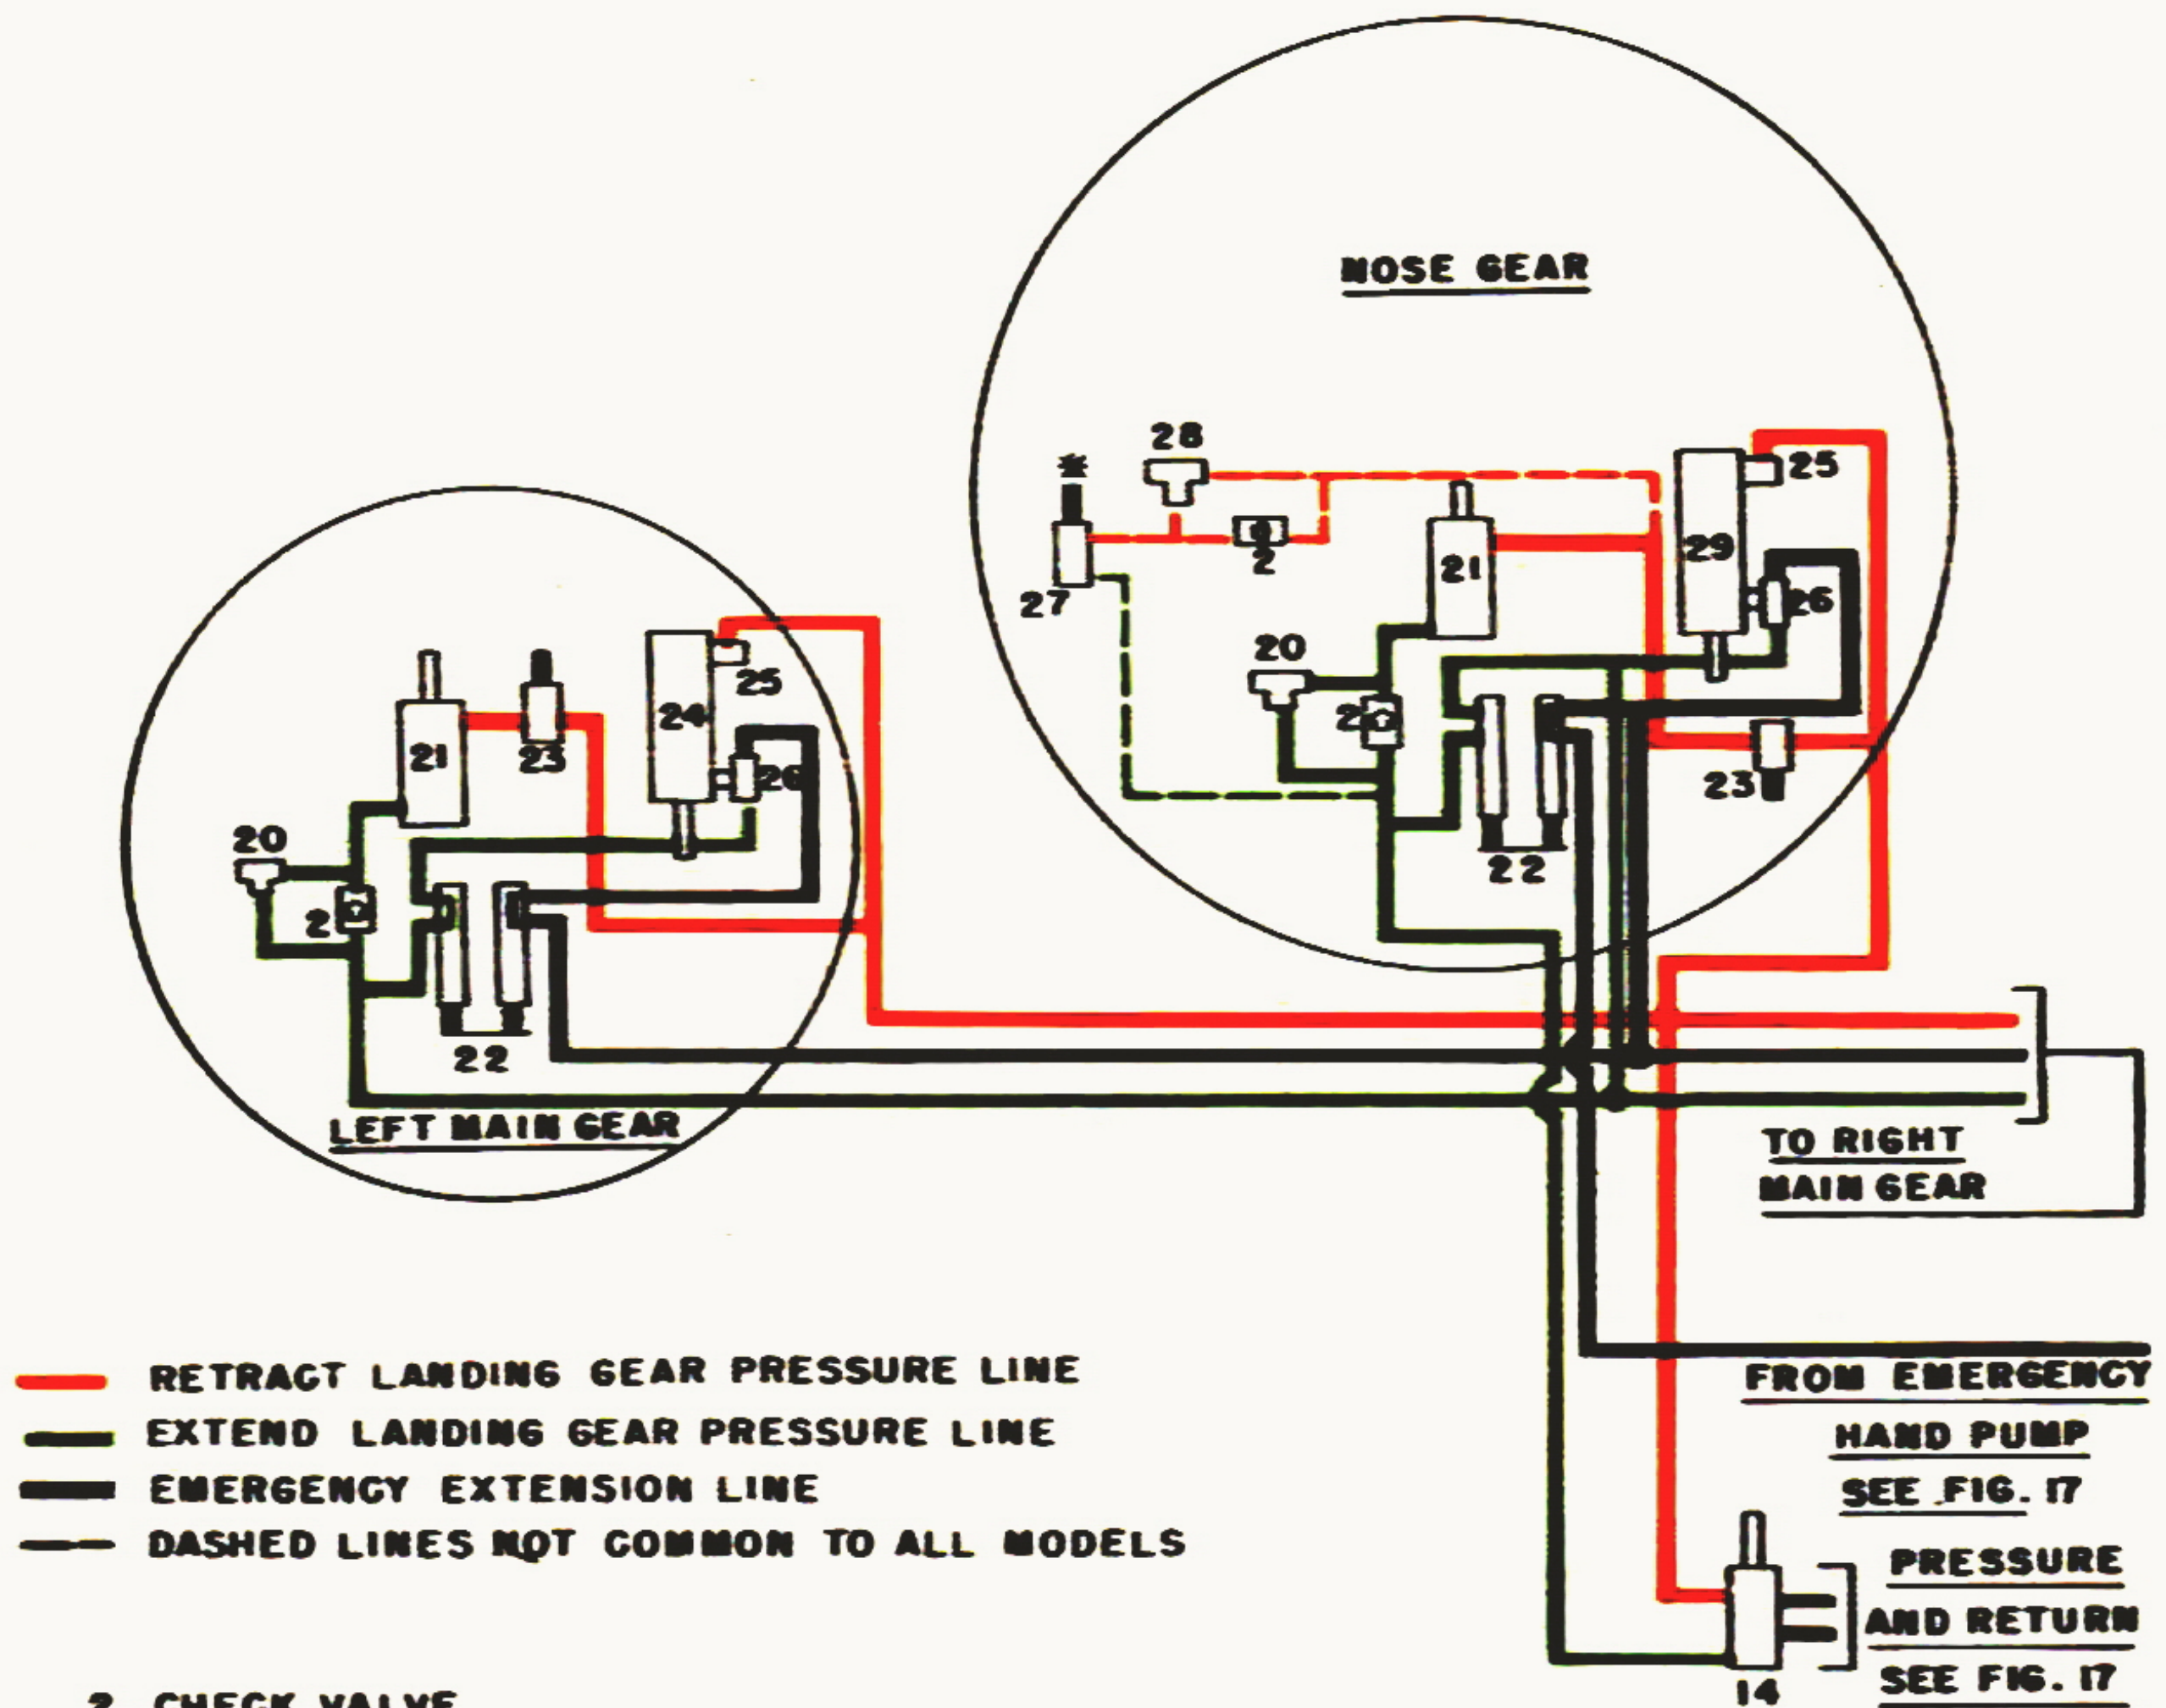


FIGURE 18—LANDING GEAR HYDRAULIC SYSTEM

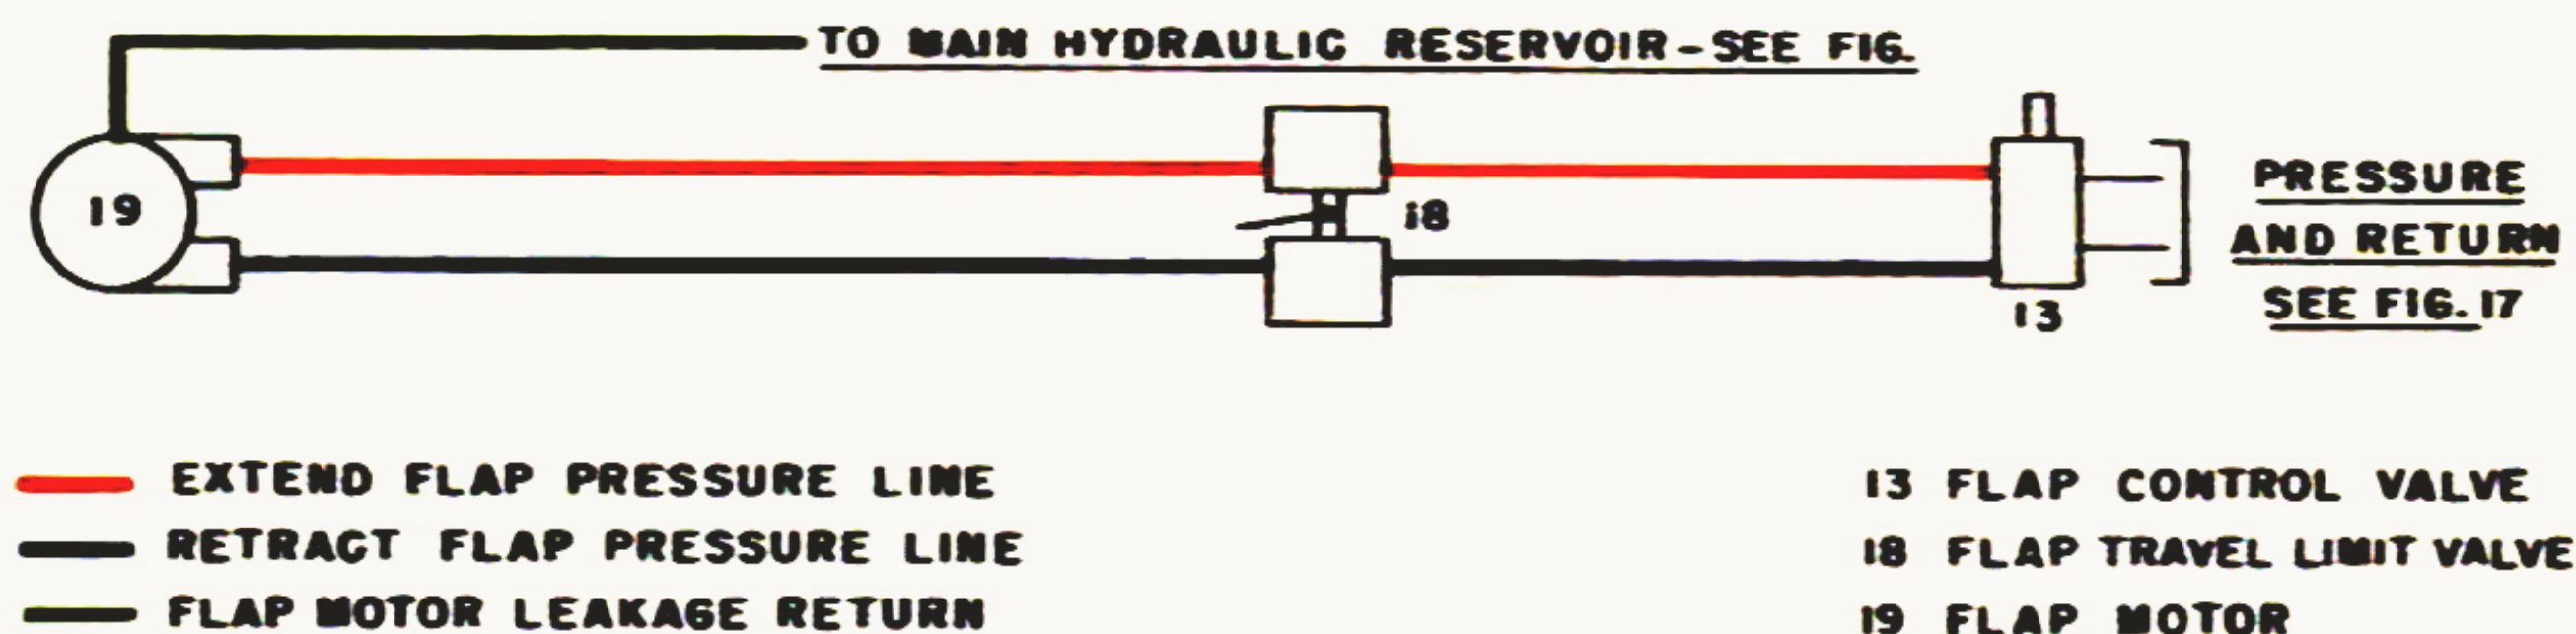


FIGURE 19-FLAP HYDRAULIC SYSTEM

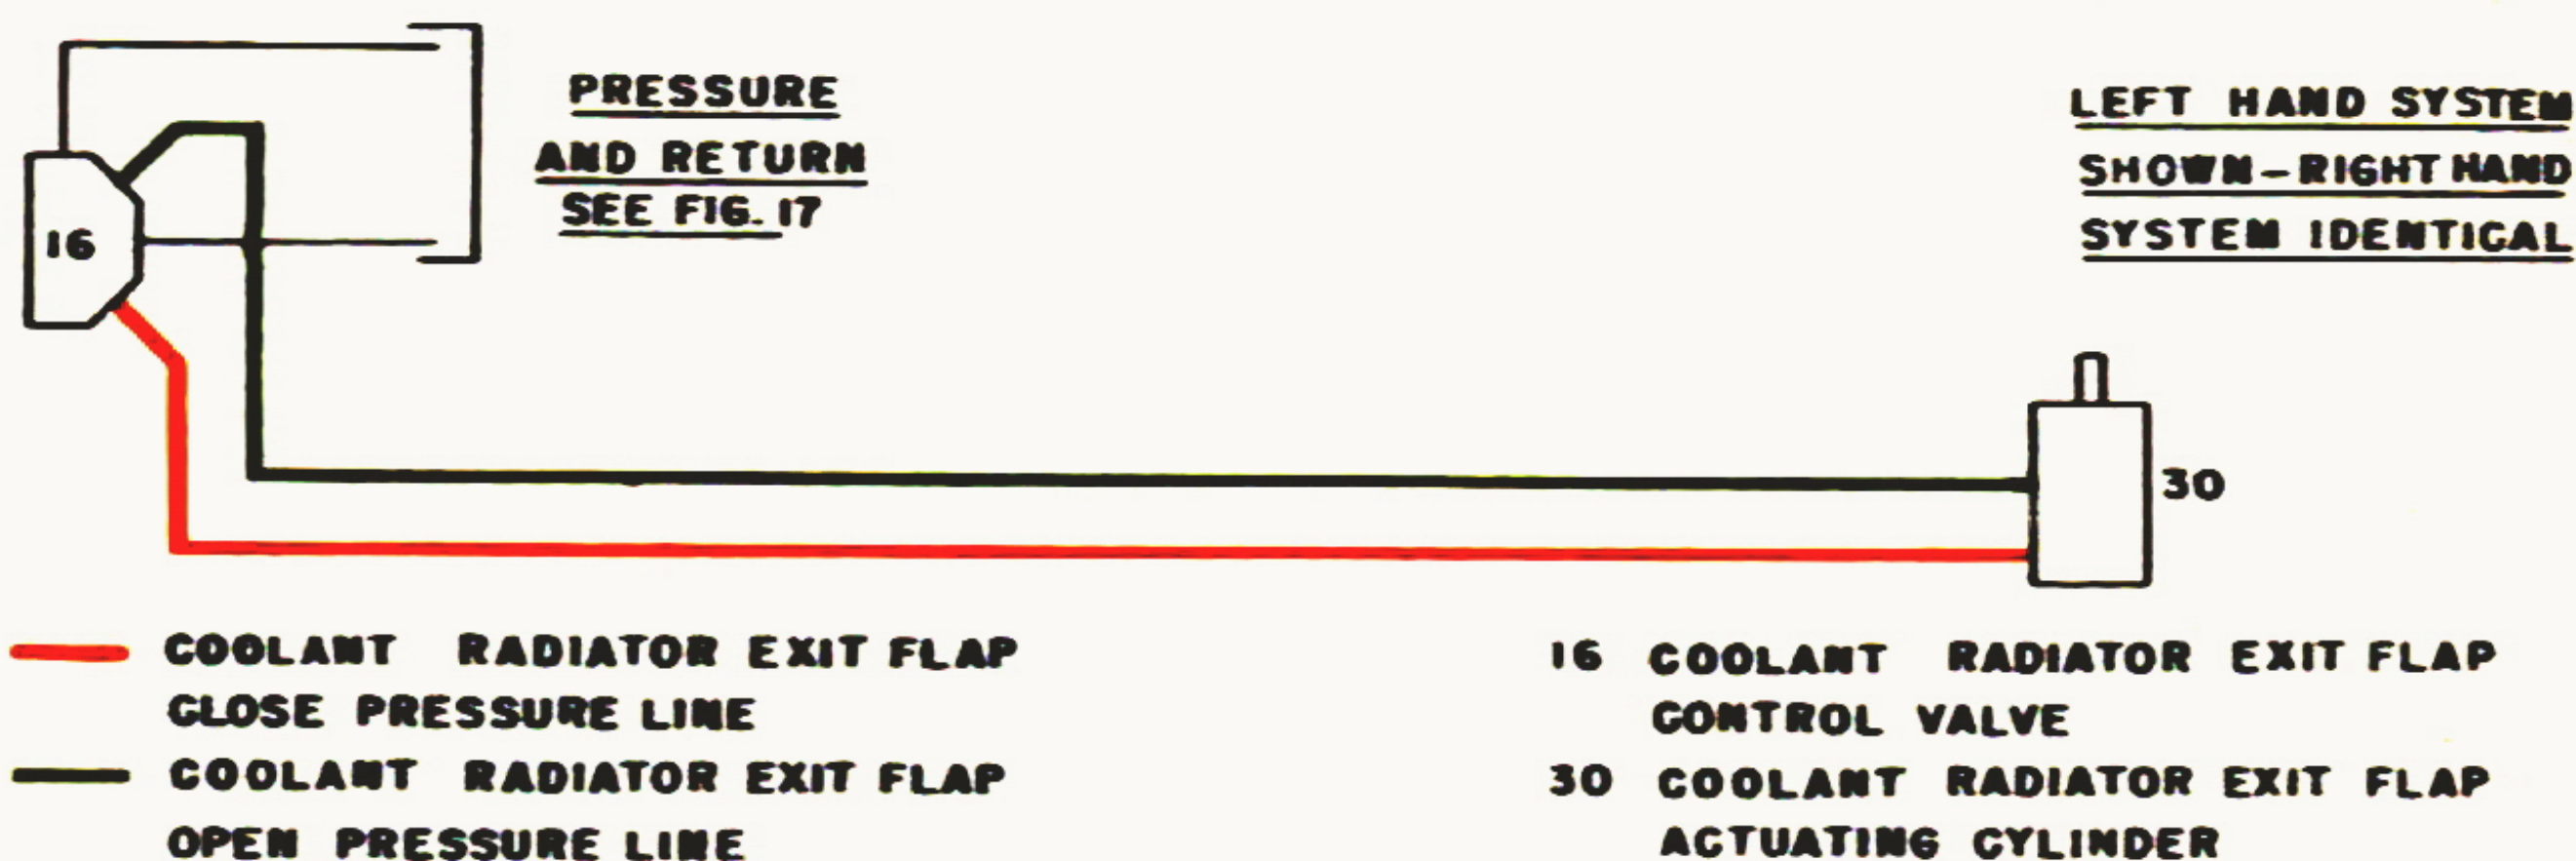


FIGURE 20-COOLANT RADIATOR EXIT FLAP HYDRAULIC SYSTEM

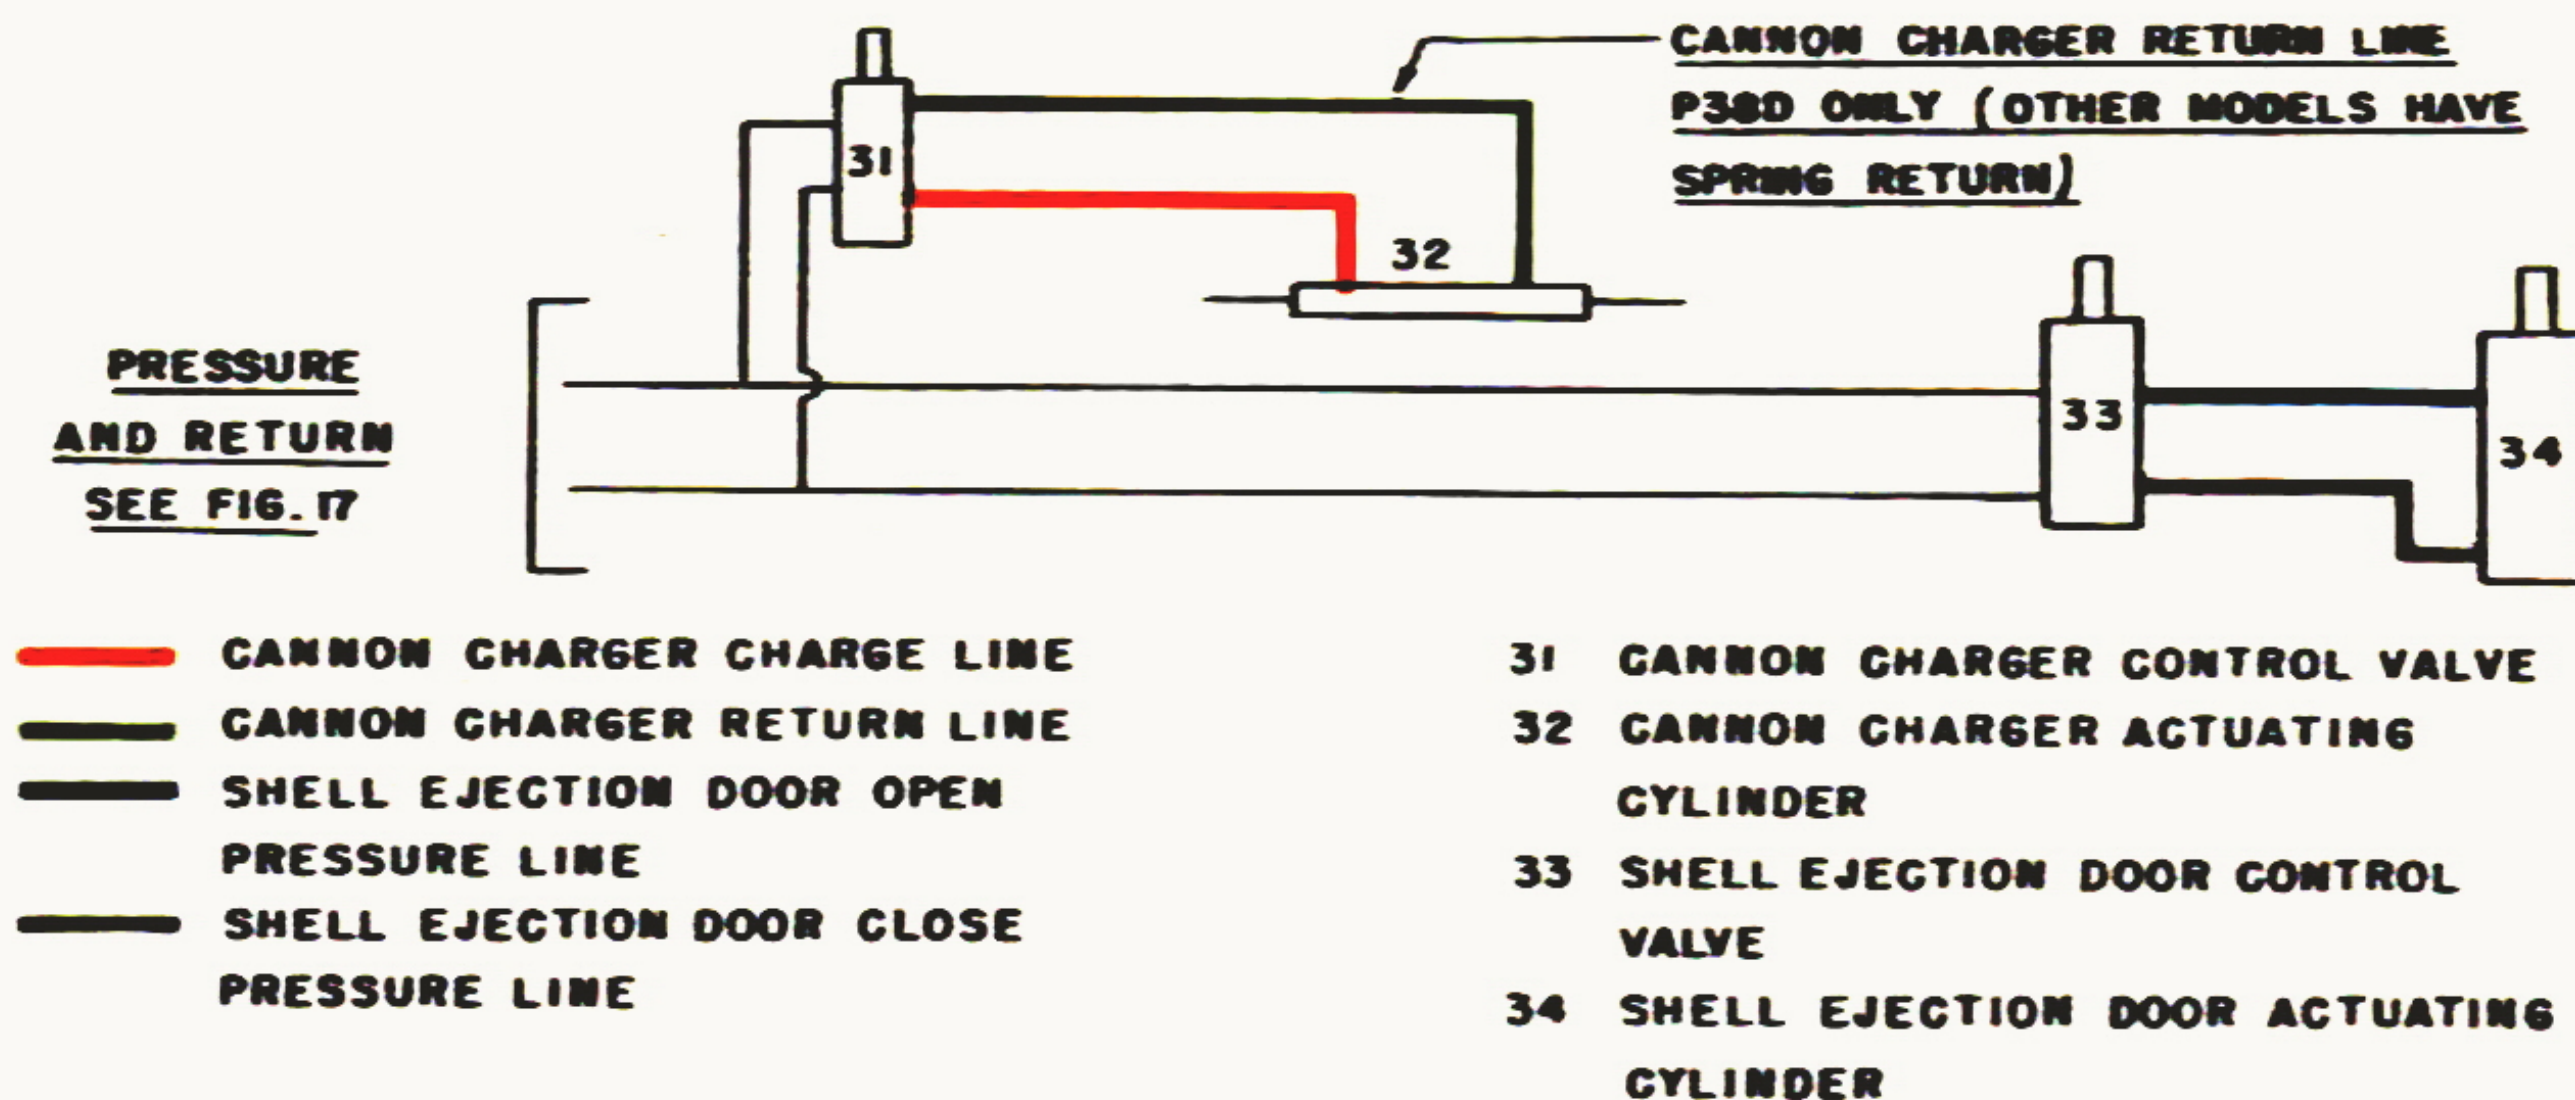


FIGURE 21-CANNON CHARGER HYDRAULIC SYSTEM

SECTION II

PILOT OPERATING INSTRUCTIONS

1. FLIGHT RESTRICTIONS.

a. Snap rolls and spins are prohibited with this airplane; such maneuvers as Immelmans, loops, and rolls are permitted with the exercise of extreme care.

b. Acrobatics should not be attempted at low altitudes.

c. Maneuvers involving prolonged inverted flight may cause complete loss of engine oil pressure, and are therefore restricted until such time as airplanes can be equipped with a device insuring continuous oil flow.

d. Do not close the throttle to allow a manifold pressure of less than 20 in. Hg. during dive.

e. Do not exceed the airspeeds of accelerations shown in Fig. 24; do not exceed 3.73 negative acceleration. Engine speeds must not exceed 3120 rpm.

f. Diving must not be attempted with the flaps or landing gear down.

g. Do not extend landing lights above 140 mph indicated airspeed.

h. Military maximum speed, 3000 rpm for 5 minutes; normal maximum speed, 2600 rpm; no limit.

i. Maximum oil temperature, 95°C. (203°F.).

j. Maximum coolant temperature, 125°C. (257°F.); minimum 85°C. (185°F.).

k. Manifold pressure: military maximum, 40.3 in. Hg. for 5 minutes only; normal maximum, 27 in. Hg. The military maximum is possible only with P-38D, P-38E, and F4.

l. Maximum fuel pressure 16 lb./sq. in.; minimum 12 lb./sq. in.

2. BEFORE ENTERING COCKPIT.

a. Obtain Flight Clearance.


(1) In event of war operations, secure radio frequency assignment for the flight.

(2) If radio model SCR-AL-283 is installed in the airplane, ascertain that the assigned frequency is within tuning limits of the receiver "plug-in" coil. Change "plug-in" coils if necessary. The radio receiver is located aft of the pilot (Fig. 3-8).

(3) If radio model SCR-274N is installed in the airplane, be sure correct transmitter is installed and tuned for proper frequency.

(4) If radio model SCR-522 is installed in the airplane, be sure correct crystals are installed for proper frequency range.

b. Secure and check pilot safety equipment (parachute, oxygen mask, microphone, maps, etc.).

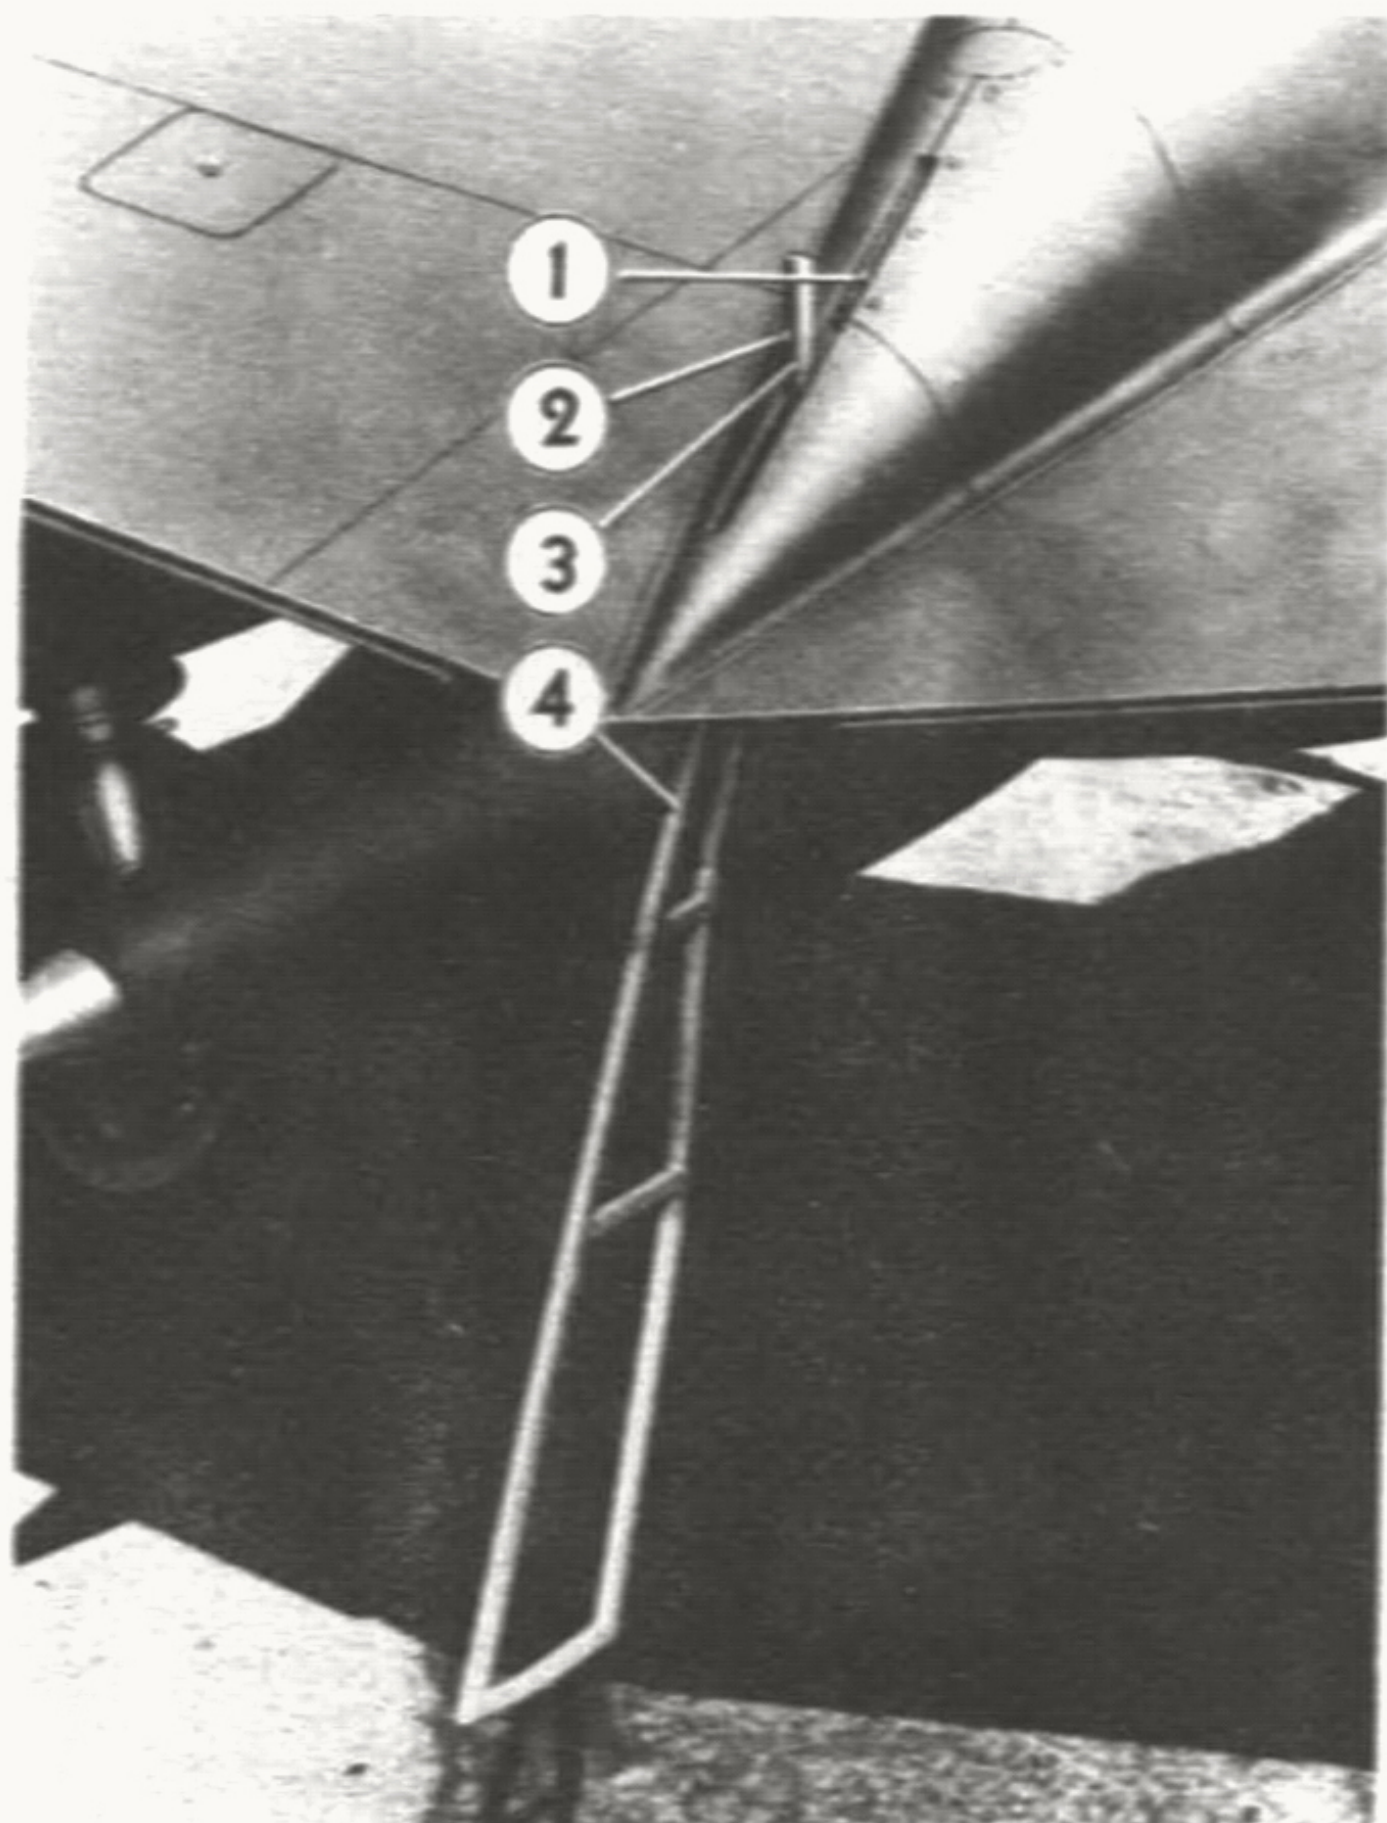

1..... Up Lock Release 3..... Ladder Lever
2..... Down Lock Release 4..... Ladder

FIGURE 22—ACCESS LADDER

c. Baggage and tools may be carried when secured with the hold down straps in the baggage compartment. This compartment is in the right hand aft boom on the fighter airplanes and in the left hand aft boom on the photographic airplanes.

CAUTION: Under no circumstances will baggage or tools be carried that violate the instructions in Section III paragraph 1, as an excessively rearward center of gravity is likely to result.

d. To get on the wing, lower the folding ladder (Fig. 22-4) provided at the rear of the fuselage by pushing the ladder uplock lever (Fig. 22-1) and pulling the ladder operating handle (Fig. 22-3) to the vertical position. After climbing onto the wing stow the ladder by releasing the downlock lever (Fig. 22-2) and pushing the ladder operating handle *firmly* into the stowed position.

e. Enter the cockpit from the left by turning the handle on the top hatch allowing it to be raised and rotated about hinge pins on the right. On airplanes with serial numbers higher than 42-12767, turn the latch releases (Fig. 23-1 and 23-10) and rotate the top hatch backwards. The side panel may be lowered by turning the crank (Fig. 10-7) inside the cockpit.



- | | |
|---------------------------------------|---|
| 1. Exterior Left Latch Handle Release | 6. Right Latch Handle—Unlocked Position |
| 2. Left Latch Handle Release | 7. Cockpit Heat Control |
| 3. Left Latch Handle—Locked Position | 8. Open Hatch Brace |
| 4. Emergency Hatch Release | 9. Right Latch Handle Release |
| 5. Glare Shield | 10. Exterior Right Latch Handle Release |

FIGURE 23—HATCH CONTROLS

3. ON ENTERING THE COCKPIT.

a. Special Check for Night Flying.

(1) Turn Battery Switch (on electrical panel) "ON".

(2) Turn airplane master switch (Fig. 5-3) "ON".

NOTE: On airplanes 43-13267 and up, airplane master switch becomes Ignition Master switch and need not be ON to operate the electrical equipment.

(3) Turn cockpit lights (Fig. 5-29) "ON"; in addition, a portable cockpit light (Fig. 7-1) with integral switch is provided on airplanes with serial numbers higher than 42-12567. An alternate location for this light is provided over the fuel selector valves (Fig. 7-7).

(4) Turn fluorescent instrument lights (Fig. 5-8) "ON".

(5) Test-operate compass light brilliancy by turning the rheostat control knob (Fig. 5-27).

(6) Test-operate landing light (or lights) for not over five seconds (Fig. 5-10). After the switch has been turned "ON", the lights will not glow until after the landing light mechanism has extended the lamp to its operating position. Return the switch to the "RETRACT" position and *leave it there*.

(7) Turn position lights (Fig. 5-9) "ON".

(8) Test-operate identification lights (Fig. 8-9). Airplanes with serial numbers above 42-12567 only.

b. Check for all Flights.

(1) Turn airplane master switch (Fig. 5-3) "ON".

(2) Ignition switches (Fig. 5-6) "OFF".

(3) Armament Master switch (Fig. 5-22) "OFF" and Cannon Charging Control (Fig. 5-16) "SAFE".

(4) Landing Gear Control Lever (Fig. 6-7) "DOWN".

(5) Flap Control Lever (Fig. 8-1) "CLOSED".

(6) Generator switch (Fig. 5-4) "OFF".

(7) Adjust rudder pedals (Fig. 6-20) for correct leg length by pushing the small spring loaded lever (Fig. 6-19) on the pedal and setting the pedals to the desired position. Release the lever, making sure that both pedals are adjusted equally and that full right and left movement of the rudder is available.

(8) Ascertain free movement of the flight control column and the aileron control wheel (Fig. 5-35) to the extremities of their operating range.

(9) Parking Brake (Fig. 5-17) "ON". To set parking brakes press both toe brake pedals and pull brake handle rearward.

(10) Adjust cockpit seat for correct height by first lifting the lock release handle (Fig. 11-5) on the right side of the pilot's seat and then raising or lowering the seat as desired. Lock the seat in position by releasing the locking handle, making sure that the spring loaded locking device has definitely engaged. Check adjustment of safety belt and of shoulder harness if installed. With

the shoulder harness on, it will be impossible to lean forward unless the lock release handle (Fig. 9-2) on the left side of the pilot's seat is raised. The mechanism is spring loaded so that if the locking handle is released the shoulder strap lock reengages when an upright position is resumed.

(11) Set Carburetor Air Filter lever "ON" when operating from a dusty field. This lever is located at the left, behind the pilot's seat and is installed on airplanes 42-12967 and up. On some earlier airplanes, carburetor air filters are installed which are "ON" when the landing gear is down and "OFF" when the gear is up.

(12) Test-operate gun sight light (Fig. 5-28).

(13) Check oxygen equipment as specified in Section IV, paragraph 1.

(14) Inspect cockpit generally to see that all components are in place and in good working order.

4. STARTING ENGINES.

a. With the airplane master switch (Fig. 5-3) "OFF" turn propeller over by hand two complete revolutions.

b. If a ground battery is being used turn "OFF" battery switch located on main switch box.

c. Turn airplane master switch (Fig. 5-3) "ON".

d. Check fuel quantity gauges (Fig. 4-15 and 4-16).

e. Set fuel tank selector valves (Fig. 9-9 and 9-10) to "RESERVE" if full.

f. Move the coolant shutter controls (Fig. 6-14) "REARWARD" to close and "FORWARD" to open. Leave in the "OFF" position unless the shutter position is being changed. "CLOSE" the shutters to hasten warm-up of cold engines and set as conditions require for warm engines.

(1) Airplanes 42-13167 and up have automatic coolant shutters which are in operation as long as the coolant override switches, located on the electrical panel, are "OFF". The automatic control is set to regulate between 101° C. (212° F.) (flaps closed) and 121° C. (250° F.) (flaps open).

(2) In the event of failure of the automatic mechanism, the shutters may be either fully opened or fully closed by operating the override switches. If hydraulic pressure fails, the flaps will assume a mid-position.

g. Move the oil shutter switches (Fig. 5-5) "UP" to close and "DOWN" to open. Leave in the "OFF" position unless shutter position is being changed. "CLOSE" the shutters to hasten the warm-up of cold engines and set as conditions require for warm engines.

(1) Airplanes 42-13067 and up have automatic oil shutters operated by switches having four positions: Automatic, Off, Open, and Close. The automatic control is set to regulate between 75° C. (167° F.) (flaps closed) and 95° C. (203° F.) (flaps open).

(2) Normally, these switches will be left in AUTOMATIC, however, the shutters may be operated manually in the event of failure of the regulator.

b. "PUSH" the propeller circuit breaker buttons to make certain the propeller circuit is closed. Turn propeller safety switches (Fig. 6-15) "ON" on airplanes not equipped with circuit breakers.

i. Set the propeller selector switches (Fig. 6-2) to "AUTOMATIC" and set the propeller governor controls (Fig. 6-3) "FORWARD" to the take-off position.

NOTE: The propeller warning lights located forward of the propeller feathering switches glow when the propeller circuit is open or when the propeller selector switches are not in "AUTOMATIC".

j. Set throttles (Fig. 6-4) to 800-1000 rpm position—approximately one-quarter inch forward of rear stop.

k. Set mixture controls (Fig. 6-13) to "IDLE CUT-OFF".

l. Flick fuel boost pumps (Fig. 9-5) "ON" and "OFF" to maintain 4 lbs. fuel pressure, then prime each engine with two strokes when warm, up to approximately four to six strokes of the dual primer (Fig. 5-19) when cold, as experience will indicate. Turn "OFF" the fuel boost pump before energizing the starter.

NOTE: Push down on primer and turn 90 degrees to operate.

WARNING: Because of the fire hazard, never use the fuel boost pump when the mixture control is out of "Idle Cut-off" unless the engine is definitely firing.

m. Turn ignition switch (Fig. 5-6) of left engine to "BOTH" position.

n. Move left hand starter switch (Fig. 5-7) to "START" position and hold until inertia flywheel sounds as though it had reached maximum rpm. Move the starter switch to the "ENGAGE" position (airplanes 42-12867 and up are equipped with separate START and ENGAGE switches). Leave the mixture control (Fig. 6-13) in "IDLE CUT-OFF" position and use the engine primer (Fig. 5-19) only, until the engine definitely fires,

at which time the mixture control should be moved immediately to the "AUTO RICH" position. The primer should be used as necessary during the time the engine is being turned over by the starter and when firing irregularly before obtaining the speed corresponding to the throttle setting. As soon as the engine starts it may be necessary to use the fuel boost pump to bring the fuel pressure to 12 to 16 lbs. if the engine-driven fuel pump does not immediately furnish pressure. If the engine does not continue to run, return the mixture to "IDLE CUT-OFF," turn "OFF" the fuel boost pump, cut the ignition switch and reprime. Repeat the starting operations, taking care to prime in accordance with conditions. Stop the engine and investigate if the oil pressure (Fig. 4-23) does not register within 30 seconds after starting.

d. Start the right engine in the same manner, taking care to return the primer to the "OFF" position after the engines have been started.

5. ENGINE WARM-UP.

a. The engine should be idled between 500 and 800 rpm for at least 30 seconds after normal idling oil pressure is indicated on the gauge, after which the warm-up will be continued at 800-1000 rpm until the oil maintains without fluctuation not more than 75 lbs. sq. in. pressure, and the oil temperature gauge (Fig. 4-28) shows a definite increase in oil temperature.

b. Turn "ON" battery switch if ground battery was used for starting.

c. Set coolant radiator shutters and oil radiator shutters as the temperature requires. The coolant warning lights (Fig. 4-26) glow when the coolant temperature exceeds 120° C. (250° F.).

6. EMERGENCY TAKE-OFF.

Start engines in normal manner, then if the engine oil was properly diluted (refer to paragraph 21) when the engines were previously stopped, the oil pressure should quickly steady itself within the limits set forth on the "Specific Engine Operation Chart" in Section III. If the oil pressure is too high, or fluctuates, or falls back when the engine rpm is increased, the oil dilution system may be operated (turn switch (Fig. 5-1) "ON") to correct this condition; however, the oil pressure gauge (Fig. 4-23) should be watched carefully as over dilution and low oil pressure is likely to result under these conditions. The airplane may be flown as soon as there has been a definite rise (10° C.—20° F.) in the oil temperatures, the oil pressures are steady, and the engines are running smoothly.

7. ENGINE AND ACCESSORIES GROUND TEST.

a. After warm-up has been completed in accordance with paragraph 4, set the left propeller selector switch (Fig. 6-2) to "OFF" and advance throttle to obtain 2300 rpm.

(1) Test individual magnetos and spark plugs by moving left ignition switch (Fig. 5-6) to "R" and then "L", and then reset to "BOTH". The loss of speed in running on either magneto alone should not exceed 100 rpm. Reset switch to "BOTH" between checks to allow rpm to pick up.

(2) Check fuel and oil pressure, and oil and coolant temperatures (refer to "Specific Engine Operation Chart" in Section III for limits).

(3) Check generator operation (left engine only) with at least 1800 rpm by noting ammeter (Fig. 5-12) shows charge and voltmeter (Fig. 5-11) reads approximately 28 volts.

b. Return propeller selector switch (Fig. 6-2) to "AUTOMATIC." Pull propeller governor lever (Fig. 6-3) "REARWARD" until a reduction in rpm is observed (Fig. 4-22). Return propeller governor lever "FORWARD" to take-off position, noting that rpm again increases.

c. Open throttle to take-off power (Refer to "Specific Engine Operation Chart" in Section III) and then immediately cut down to idling speed.

NOTE: This is the only possible ground check of turbo supercharger operation and is fully as important as the magneto check.

d. Repeat operation for right engine, omitting generator check.

e. Check vacuum system by turning vacuum selector valve (Fig. 11-7), if installed, to "LEFT ON", then "RIGHT ON", while noting reading on suction gauge (Fig. 4-2). Return selector valve to "BOTH ON".

f. Check hydraulic system by pulling flap control handle (Fig. 8-1) to "DOWN" position until indicator (Fig. 4-24) shows flaps extended. Push flap control lever to "UP" position until flaps are retracted, then return lever to "CLOSED" position.

g. Refer to Section IV, paragraph 2 for complete instructions on operation of airplane's radio equipment.

b. For fighter airplanes refer to Section IV, paragraph 3 for complete instructions on operation of airplane's armament, or for photographic airplanes refer to Section IV, paragraph 4 for complete instructions on operation of airplane's cameras.

8. TAXIING INSTRUCTIONS.

The tricycle gear allows the airplane to roll very easily on the ground. Quick stops from high speed taxiing impose severe loads on the brakes. Steering can be accomplished easily in taxiing with power.

9. TAKE-OFF.

NOTE: To prevent possible siphoning from the reserve tank, take-off and flight will be made on reserve tank, until at least fifteen gallons are used, before switching to the main tanks.

a. Flaps Up. If a short take-off run is necessary, extend flaps $\frac{1}{2}$ down by pulling flap control handle (Fig. 8-1) to the "DOWN" position until the indicator (Fig. 4-24) shows flaps down $\frac{1}{2}$, then return flap control handle to "CLOSED" position. Flaps will remain in position until flap control handle is moved. Airplanes with serial numbers higher than 42-12667 and 43-2064 are equipped with maneuvering flaps (Reference paragraph 11) which are $\frac{1}{2}$ down when the flap control lever is set to the "MANEUV" position. On these airplanes it is not necessary to return the flap control lever to the "CLOSED" position to keep the flaps $\frac{1}{2}$ down.



WARNING: When using maneuvering flaps, leave the flap control lever at MANEUVERS. If the lever is moved even slightly forward and then returned to "MANEUVERS," the flaps will extend completely.

b. "OPEN" coolant radiator shutters (Fig. 6-14) and oil radiator shutters (Fig. 5-5).

c. Set rudder trim tabs (Fig. 5-20), elevator trim tab (Fig. 6-18), and aileron trim tabs (Fig. 5-34) to the "O" position.

d. If icing conditions exist turn pilot tube heater switch (Fig. 5-15) "ON."

e. The top hatch should be locked in place and the two side panels should be cranked (Fig. 10-7 and 11-2) "CLOSED" with the ratchet (Fig. 10-3 and 11-2) "ON" for take-off and all normal flight operations.

f. Turn selector switches (Fig. 7-10) "ON" if dropable fuel tanks or bombs are installed so that they may be dropped quickly in case of engine failure on take-off. Turn arming switch (Fig. 7-3) to "SAFE" if bombs are installed.

g. Refer to Take-off, Climb, and Landing Chart in Section III for take-off distance to be expected.

b. Set engine controls in accordance with "TAKE-OFF" settings listed in the "Specific Engine Flight Chart" in Section III.

i. Due to lag in the turbo supercharger boost, maximum performance take-offs require holding the airplane with brakes until engine power reaches the desired settings. During take-offs there is no operation of the controls necessary other than to keep the airplane straight until the take-off speed is reached. The exact speed depends upon the flap setting, the power used for take-off, and the gross weight of the airplane, and varies between approximately 90 mph for the normally loaded airplane to approximately 110 mph for the airplane with fully loaded 300 gallon dropable tanks.

j. Retract the landing gear as soon as practical after breaking ground by raising the landing gear lever (Fig. 6-7) to the "UP" position. An emergency release (Fig. 6-10) is provided to permit movement of the lever from the down position in the event that the safety device actuated by extension of the landing gear shock strut fails to function. This device prevents movement of the lever from the down position while the struts are compressed. Operate the release by turning in a counter-clockwise direction with the left thumb. If the gear does not retract with the landing gear lever in the "UP" position, it is possible to retract the gear by operating the hand hydraulic pump (Fig. 11-6); however, it will take approximately 5 to 10 minutes to manually retract the gear and it is recommended that the airplane be landed and the difficulty corrected.

k. Retract the flaps by placing the flap control lever (Fig. 8-1) in the "UP" position. If the flaps fail to retract, operate the hand hydraulic pump (Fig. 11-6) if necessary to continue flight, otherwise land and investigate. When the flap indicator (Fig. 4-24) shows the flaps retracted return the flap control lever to the

"CLOSED" position. With flaps $1\frac{1}{2}$ down do not exceed 250 mph in airplanes equipped with maneuvering flaps, or 150 mph in other airplanes.

10. ENGINE FAILURE DURING TAKE-OFF.

a. Failure of one engine before take-off. If one engine fails while still on the ground, close both throttles immediately and apply the brakes. If it is impossible to stop within the airport boundary it may be desirable, if droppable tanks or bombs are not installed, to pull the landing gear lever (Fig. 6-7) to the "UP" position, causing the gear to collapse. With the airplane on the ground it will be necessary to rotate the emergency landing gear lever release (Fig. 6-10) counter-clockwise with the left thumb before the lever can be raised.

b. Failure of one engine immediately after take-off but before a safe speed has been reached. If one engine fails before a safe speed has been reached, close both throttles and land with the landing gear lever in the "UP" position so that the gear will collapse on landing, unless there is ample room ahead. Release the droppable fuel tanks or bombs, if installed, by pressing the release button (Fig. 7-11) on the F-5A and fighter airplanes, or by operating the droppable fuel tank release switches (Fig. 10-1) located on both sides of the cockpit on the F-4 and F-4A airplanes.

c. Failure of one engine after take-off when a safe speed has been reached.

(1) Immediate actions:

(a) Throttle the live engine, lead with rudder control, then apply necessary power.

CAUTION: Do not use full power on live engine under 120 mph. Apply corrective rudder action promptly so as to positively prevent the airplane from yawing excessively (skidding). Excessive yaw will result in stalling of the vertical tails, the rudder forces will reverse and it will be necessary to materially reduce the power of the operating engine and apply considerable rudder force to regain control. This situation can be prevented by keeping the airplane flying straight by means of prompt rudder action and necessary throttling of live engine.

(b) Pull the landing gear lever (Fig. 6-7) to the "UP" position.

(c) Release the droppable fuel tanks or bombs (see paragraph 9, *b* above).

*Use some will power —
Throttle the live engine
until you straighten her out.*

(d) Feather the propeller of the dead engine by pushing (forward) the applicable feathering switch (Fig. 6-1). Perform this operation deliberately so that the propeller of the live engine will not be feathered. There is one axiom concerning flight of *all* twin engine airplanes on one engine, that must be rigidly observed. **NEVER FLY ON ONE ENGINE WITH THE OTHER PROPELLER WINDMILLING IN LOW PITCH**, i.e. with the throttle closed and the propeller control in any position but full rearward. The reason for this is that a propeller windmilling at a speed in excess of 1000 rpm (Engine speed) causes so much drag on one side of the airplane that *rudder control is seriously affected and climbing performance materially reduced*. If circumstances do not permit feathering the propeller on the inoperative engine, at least place the propeller control in the full high pitch position, "REARWARD" as soon as the throttle is closed.



FEATHER THE WINDMILLING PROPELLER

(e) Gain as much speed as possible in level flight before attempting to climb.

(2) Subsequent actions:

(a) Push flap control lever (Fig. 8-1) "FORWARD" to retract flaps. When retracted pull lever back to "CLOSED".

(b) Trim the airplane, using rudder trim tab to off-set the single engine yawing effect.

(c) Reduce power of live engine to normal rated power as soon as practicable. (Reference "Specific Engine Flight Chart," Section III.) The airplane climbs well on one engine operating at normal power if the flaps and landing gear are retracted. The best speed for single engine climb is approximately 140 mph.

(d) Watch coolant temperature of live engine and adjust coolant shutters (Fig. 6-14) accordingly. *"CLOSE" coolant shutters of the dead engine.*

(e) Watch oil temperature of live engine and adjust oil shutter (Fig. 5-5) accordingly. *"CLOSE" oil shutter of the dead engine.*

(f) Turn "OFF" fuel tank selector valve (Fig. 9-9 or 9-10), fuel boost pump (Fig. 9-5), and ignition switch (Fig. 5-6) of dead engine.

(g) Climb to a safe height (1000 feet or more), then circle the airport and land (Reference paragraph 20-j for landing instructions). *It is always safer to make turns with the dead engine on the outside of the turn. Do not make steep turns while operating on one engine.*

11. CLIMB.

a. Refer to the applicable "Take-off, Climb & Landing Chart" in Section III for the rpm, manifold pressures and best indicated airspeeds to be used during climb.

b. Set mixture controls (Fig. 6-13) to "AUTOMATIC RICH" at all times during climb.

c. Set coolant shutter controls (Fig. 6-14) and oil shutter controls (Fig. 5-5) so that the coolant and oil temperatures will not exceed the limits specified on the applicable "Specific Engine Flight Chart." The coolant warning lights (Fig. 4-26) glow when the coolant temperature exceeds 120° C. (250° F.).

12. FLIGHT OPERATIONS.

a. Plan all flight cruising conditions from the applicable "Flight Operation Instruction Chart" in Section III. Charts are provided for the operation of the airplane with 300 gallon, 150 gallon or droppable tank supports only installed. For operation of the airplane

with 75 gallon tanks or 1100# or smaller bombs use the charts for the airplane with 150 gallon tanks installed. For operation of the clean airplane use the charts for the airplane with droppable tank supports only installed.

(1) Instructions for using the "Flight Operation Instruction Chart" are printed on top of each chart. Determine the correct chart to use by noting the type of droppable tanks or bombs suspended below the wing. Refer to Figs. 13, 14 or 15 for diagrams of the fuel system and fuel tank capacities, and Fig. 16 for diagram of the oil system and oil tank capacities.

(2) The indicated airspeed values shown on the "Flight Operation Instruction Charts" will give correct airplane airspeed indicator readings only when the pitot mast is located beneath the left outer wing panel. On airplanes with pitot mast located beneath the nose of the fuselage it will be necessary to correct the values shown on the "Flight Operation Instruction Charts" for pitot location error by referring to the table in paragraph 23. For example, if the instruction chart gives an indicated airspeed of 275 mph, on airplanes with nose pitot location the airplane airspeed should be set to read 264 mph. (See paragraph 23.)

(3) Example of the use of "Flight Operation Instruction Charts."

(a) Example: Find the correct rpm and ias (Indicated air speed) which should be used to fly 1150 miles at 15000 feet with a P-38E airplane equipped with a pitot mast under the nose, 150 gallon droppable tanks, and 550 gallons of gasoline.

(b) Solution:

1. Turn to the "Flight Operation Instruction Chart" for P-38E airplanes with 150 gallon droppable tanks.

2. Allowing 43 gallons for take-off and climb, and assuming for this flight 75 gallons reserve fuel, there are 432 gallons available for cruising.

3. Opposite next lower fuel quantity shown (420 gallons) locate air-miles (no wind) just beyond desired range (1180 statute air-miles).

4. Vertically below in cruising condition III and opposite desired cruising altitude (15000 feet) read optimum cruising rpm (2200 rpm) and indicated airspeed (215 mph). Note that light printing is used, hence the mixture should be set to AUTO LEAN.

5. Since the ias values shown on the chart are correct only when the pitot mast is located on the wing,

*A little flight planning
before take off may mean
a lot later on.*

it will be necessary to correct the ias value given (215 mph) by reference to paragraph 23 *b*. By estimation between 200 and 225, this chart shows that 210 mph should be used.

b. Trim airplane for level flight.

(1) Rotate rudder tab control (Fig. 5-20) "CLOCK-WISE" to turn nose of airplane to the RIGHT.

(2) Rotate elevator tab control (Fig. 6-18) "CLOCK-WISE" to put nose DOWN.

(3) Rotate aileron tab control (Fig. 5-34) "CLOCK-WISE" to put right wing DOWN.

c. To increase power during flight set the mixture controls to "AUTO RICH", adjust propellers to desired rpm, adjust the throttles to obtain the desired manifold pressure, and then readjust the mixture controls if necessary.

NOTE: The throttle levers are inter-connected to the supercharger regulator, thereby eliminating supercharger regulator controls and their operation as a separate function by the pilot. The operation of the throttle is essentially the same as that for engines without turbine superchargers, except that throttle movement is relatively small for a given change in power compared to conventional airplanes. When operating in the range controlled through the supercharger regulator (approximately the last third of the throttle movement), the control is definitely sluggish and care must be exercised to avoid over-running the desired power setting. This is particularly true when power is applied suddenly, such as take-off and acrobatics.

d. To decrease power during flight, adjust the throttles to obtain the desired manifold pressure, adjust the propeller controls to obtain the desired rpm, readjust the throttles, if necessary, and then adjust the mixture controls, if necessary.

Remember the rule, INCREASE RPM BEFORE INCREASING MANIFOLD PRESSURE, DECREASE MANIFOLD PRESSURE BEFORE DECREASING RPM.

e. Operation of Propeller Controls.

(1) To change propeller rpm with selector switches (Fig. 6-2), set to "AUTOMATIC", adjust propeller governor control lever (Fig. 6-3) to obtain desired rpm. If the propeller circuit breakers, or safety switches (Fig. 6-15) throw out and will not remain in the "ON"

position, the selector switches (Fig. 6-2) should be set to "OFF". When absolutely necessary it may be possible to change pitch by holding the circuit breaker button or safety switch "ON" while operating the inc-rpm, dec-rpm switch (Fig. 6-2). Refer to paragraph 20, *c* (1) for landing instructions with propeller in fixed pitch.

(2) To change propeller rpm manually, operate "inc-rpm, or dec-rpm" switch (Fig. 6-2) as required.

(3) Synchronize propeller by ear using the tachometers and the propeller vernier (Fig. 6-6) which allows fine adjustment of the right governor lever (Fig. 6-3).

(4) To feather propeller push applicable feathering switch (Fig. 6-1) to "FEATHER". To unfeather propeller and start engine, pull applicable feathering switch to "NORMAL" position and hold selector switch (Fig. 6-2) in "INC-RPM" position until tachometer shows at least 800 rpm with throttle cracked and mixture control "IDLE CUT-OFF". Turn fuel selector valve to tank containing fuel and turn "ON" fuel boost pump if fuel pressure doesn't come up. Turn ignition switch "ON", move mixture control to AUTO RICH and engine should start.

f. Operate engines from RESERVE tank for first 15 minutes of flight to allow room for the carburetor bleed back of approximately two quarts per hour. Then, if droppable tanks are installed, turn fuel selector valves (Fig. 9-9 and 9-10) to "DROP ON". As these tanks are not equipped with fuel gauges, their operating duration may be determined by dividing the cruising power gasoline consumption into the tank capacity. Gasoline consumption in U. S. gallons per hour are listed opposite each engine setting on the "Flight Operation Instruction Chart." (Refer to Fig. 15 for fuel tank capacities.)

g. To release droppable fuel tanks, (Flaps and Gear UP).

(1) Turn selector valves (Fig. 9-9 and 9-10) to either main or reserve tanks.

(2) Arming switch (Fig. 7-3) "ARM" or "SAFE".

(3) Raise the selector switches (Fig. 7-10) and press the release button (Fig. 7-11) on F-5A and fighter airplanes, or on F-4 and F-4A airplanes raise the switch guards and trip the toggle switches (Fig. 10-1) located on each side of the cockpit.

(4) Full tanks may be dropped at any indicated airspeed not exceeding 400 mph. Empty 75 or 150 gallon tanks must be dropped below 160 mph indicated airspeed with gear and flaps up.

WARNING: Empty 300 gallon tanks are to be dropped *only in an emergency*. The tanks may hit the airplane when dropped, consequently the airplane *must* be slowed down to 120 mph with gear and flaps up to avoid serious damage.

b. The fuel boost pumps (Fig. 9-5) should be turned "OFF" after take-off, and turn "ON" at altitude if the fuel pressure falls below 13 lbs. sq. in. or if the engine fuel pump fails. The fuel pressure warning lights (Fig. 4-13) glow when the fuel pressure falls below 12 lbs. sq. in.

i. Refer to Section IV for complete information and instructions on operating the airplane oxygen, radio, armament, and photographic equipment.

j. *Carburetor heat.* Carburetor air preheat is provided automatically by the turbo superchargers. It is possible, however, to encounter carburetor icing during extremely cold weather at low altitude when operating at low power. In such case, the power should be increased boldly and the airplane put into a rather steep climb. If descending for landing, put gear down, flaps $\frac{1}{2}$ down and increase power. Both actions will increase the temperature of the carburetor air and clear away the carburetor ice. Carburetor air temperature (Fig. 4-30) which is measured ahead of the carburetor, should be kept below 50° C. (120° F.).

k. *Oil temperature.* Operate oil radiator shutter switches (Fig. 5-5) to keep shutters as nearly closed as possible while maintaining the oil temperature within the proper operating limits (See "Specific Engine Control Chart," Section III). During cold weather, or at altitude in warm weather, the oil can be easily overcooled with resultant congealing in the radiator cores. When congealing occurs, the oil temperature will increase and opening the shutters will not check the increase. When the temperature increases under congealing conditions (i.e. operation at cruising power when the air temperature is low), the shutters should be closed completely for a period of a few minutes. This will uncongeal the oil and re-establish normal flow through the radiators with the result that the oil temperature will decrease. As soon as a decrease in oil temperature is noticed, the shutters should be cracked open just enough to hold the temperature down around 80° C. (176° F.). At low power it will be necessary to keep the shutters closed longer than at high power. If the foregoing procedure does not result in the resumption of normal oil temperature, the engine should be throttled back and the procedure repeated while losing altitude. The oil pressure should be watched closely and the rpm and power reduced if it drops.

l. *Maneuvering flaps.* Airplanes with serial numbers higher than 42-12667 and 43-2064 are equipped with maneuvering flaps which may be used to increase the maneuverability of the airplane at speeds below 250 mph. To extend the flaps to the maneuvering position, pull the flap lever back to the stop at the "MANEUV" position. The flaps will then extend 50% to the maneuvering position and stop. Retract flaps in normal manner.

m. If inverter warning light (Fig. 5-13) goes on, turn inverter switch (Fig. 5-14) to other position. Airplanes later than 42-12567 have only one inverter with an on-off switch (Fig. 8-3).

WARNING: WHEN INVERTER WARNING LIGHT IS ON, TACHOMETER, AND PRESSURE AND TEMPERATURE INSTRUMENTS WITH CONCENTRIC POINTERS (DUAL AUTOSYN INSTRUMENTS) ARE NOT OPERATING AND THE POINTERS DO NOT RETURN TO ZERO.

n. The cockpit ventilator (Fig. 9-7) directs fresh air from the wing fuselage fillet to the cockpit and should be adjusted to suit conditions. An air vent, adjustable on the ground only, is provided aft of the radio (Fig. 3-8) on the left side. The cockpit heater control (Fig. 23-7) directs heated air from an intensifier tube in the exhaust system to the cockpit and inner surface of the windshield. On airplanes with serial numbers below 42-12569 the cockpit heater control is located on the floor in the right rear of the cockpit.

13. GENERAL FLYING CHARACTERISTICS.

a. This airplane is very stable laterally and directionally, and stable at all operating speeds longitudinally. Above placard speeds (see Fig. 24 for copy of placard) extreme nose heaviness may be encountered.

b. The trimming characteristics are normal for a twin-engined airplane. Rudder tabs (Fig. 5-20) should be neutral when the engines are supplying equal power. Aileron tabs (Fig. 5-34) normally require setting at the start of the flight only. Elevator tabs (Fig. 6-18) normally require only slight adjustments with variations in gross weight and speed.

14. ENGINE FAILURE DURING FLIGHT.

a. For single engine operation the pilot should be familiar with the variation in control characteristics of high performance twin-engine airplanes. Do not maneuver through large speed variations. Do not use full power on the live engine under 120 mph. When one

engine fails during climb, cruise, or descent, there is seldom need for emergency maximum power from the live engine.

b. Set the mixture control (Fig. 6-13) to "AUTO RICH", the propeller governor control (Fig. 6-3) to give 2600 rpm, and adjust the throttle to give a manifold pressure corresponding to "Maximum Continuous" on the "Specific Engine Flight Chart" in Section III.

c. Feather the propeller on the dead engine by pushing the feathering switch (Fig. 6-1) to "FEATHER", put mixture control (Fig. 6-13) in "IDLE CUT-OFF", turn fuel boost pump (Fig. 9-5) "OFF" and turn ignition switch (Fig. 5-6) "OFF".

d. Adjust oil shutters (Fig. 5-5) and coolant shutters (Fig. 6-14) of live engine to maintain desired temperatures and close oil and coolant shutters of dead engine.

e. Retract the flaps if extended.

f. Adjust trim tabs to give light stick forces.

Don't throw away fuel unless you're sure you won't need it.

g. Refer to the "Flight Operation Instruction Chart" for single engine operation in Section III, to determine rpm and IAS for range desired. If droppable tanks are installed and the maximum range shown on the instruction chart is not enough, retain the droppable tanks until empty before releasing them. Under these conditions draw fuel from the droppable tank on the *live engine side first*, and then from the droppable tank on the dead engine side. Release each tank as soon as it is empty. For maximum range operation with droppable tanks installed fly the airplane as low as safety permits and at the lowest power which will maintain an indicated airspeed of approximately 160 mph.

b. Turn fuel tank selector valve (Fig. 9-9 or 9-10) of dead engine to "OFF" except when operating cross suction, then proceed as follows:

(1) Airplanes equipped with provisions for droppable tanks.

(a) Set tank selector valve to tank which is to supply fuel.

(b) Turn cross suction switch (Fig. 9-4 or 10-2) "ON".

(c) Turn other tank selector valve to "OFF".

(2) Airplanes not equipped with provisions for droppable tanks.

(a) Set tank selector valve to tank which is to supply fuel.

(b) Set other tank selector valve to "CROSS SUCTION".

i. If the left engine has failed, the generator will not operate. To conserve the battery, operate the propeller in fixed pitch (propeller selector switch, Fig. 6-2, "OFF") and minimize operation of radio, lights and fuel boost pump. Turn generator switch (Fig. 5-4) "OFF".

15. STALLS.

a. The airplane stalls at the following indicated airspeeds at the following gross weights:

	15000 [±]	17000 [±]	19000 [±]
Flaps and landing gear up.....	94	100	105
Flaps and landing gear down...	69	74	78

b. In either power on or power off stalls with flaps and landing gear up the airplane "mushes" considerably, but has a well controlled stall. With flaps and landing gear down there appears to be a slight tendency for a wing to drop; however, there is no tendency to spin. Under this condition the nose also drops slightly, the speed increases, and the wing will come up. As stalling speed is approached, the center section stalls first with noticeable shaking of the airplane while the ailerons are still unstalled and effective.

c. The stall should be practiced in order that the pilot may know the feel of the controls near the stall, and the indicated stalling speed of the airplane.

16. SPINS.

Deliberate spinning is prohibited; however, if a spin occurs, rapid recover is made as follows: Neutral rudder, move the control column rapidly forward and hold until rotation stops. After two or three turns, the spin tends to flatten out and the controls reverse. Under these conditions engine power **MUST** be used to assist recovery, as it will be impossible to push the control column forward until power is applied.

17. ACROBATICS.

Although such maneuvers as loops, Immelmans and rolls are permitted, the pilot is cautioned to exercise extreme care in acrobatic maneuvers of this airplane because of its ability to gain and lose altitude very rapidly. In general, acrobatics should not be attempted at low altitudes. Acrobatics should be started at not less than 10,000 feet until the pilot is thoroughly familiar with the airplane.




18. DIVING.

a. Do not exceed the speeds and accelerations shown on the placard, (Fig. 24). The airplane, if operated at combinations of acceleration and airspeed in excess of those contained on the placard, will be subject to severe buffeting and nose heaviness. The placard indicates the limits for three altitudes, 10,000 feet, 20,000 feet and 30,000 feet. To illustrate the use of the placard consider the following specific cases. At 30,000 feet if a pullout of over 3.3 g. is made at 225 mph indicated airspeed, buffeting will occur. To stop the buffeting reduce the acceleration slightly. However if a very steep dive is made in which an airspeed of approximately 300 mph is reached at 30,000 feet, the airplane will start to buffet and get extremely nose heavy simultaneously. If this occurs throttle the engines, and if the elevator force required to bring the nose up is excessive, use the elevator trim tab to assist. However, as soon as the speed or altitude has reduced; the buffeting will cease, the airplane will be tail heavy and it will be necessary to retrim with the elevator tab. Similarly if an acceleration of 4.5 g at 300 mph indicated airspeed is exceeded at 20,000 feet, buffeting will occur. This can be stopped by letting up on the stick and reducing acceleration. However, if an airspeed of approximately 385 mph is reached at 20,000 feet, the airplane will get nose heavy and buffet simultaneously, in which case it will be necessary to close the throttles and pull out of the dive, possibly using elevator tab to assist.


Observe the following rules:

(1) If buffeting occurs during accelerated maneuvers, i.e. dive pullouts or steep turns, it can be stopped by reducing the acceleration.

(2) If buffeting occurs due to excessively high speed in a steady dive, reduce airplane speed applying minimum acceleration as any acceleration will increase the buffeting. Closing the throttles is the first thing to do. Use elevator tab, if necessary, to assist recovery.

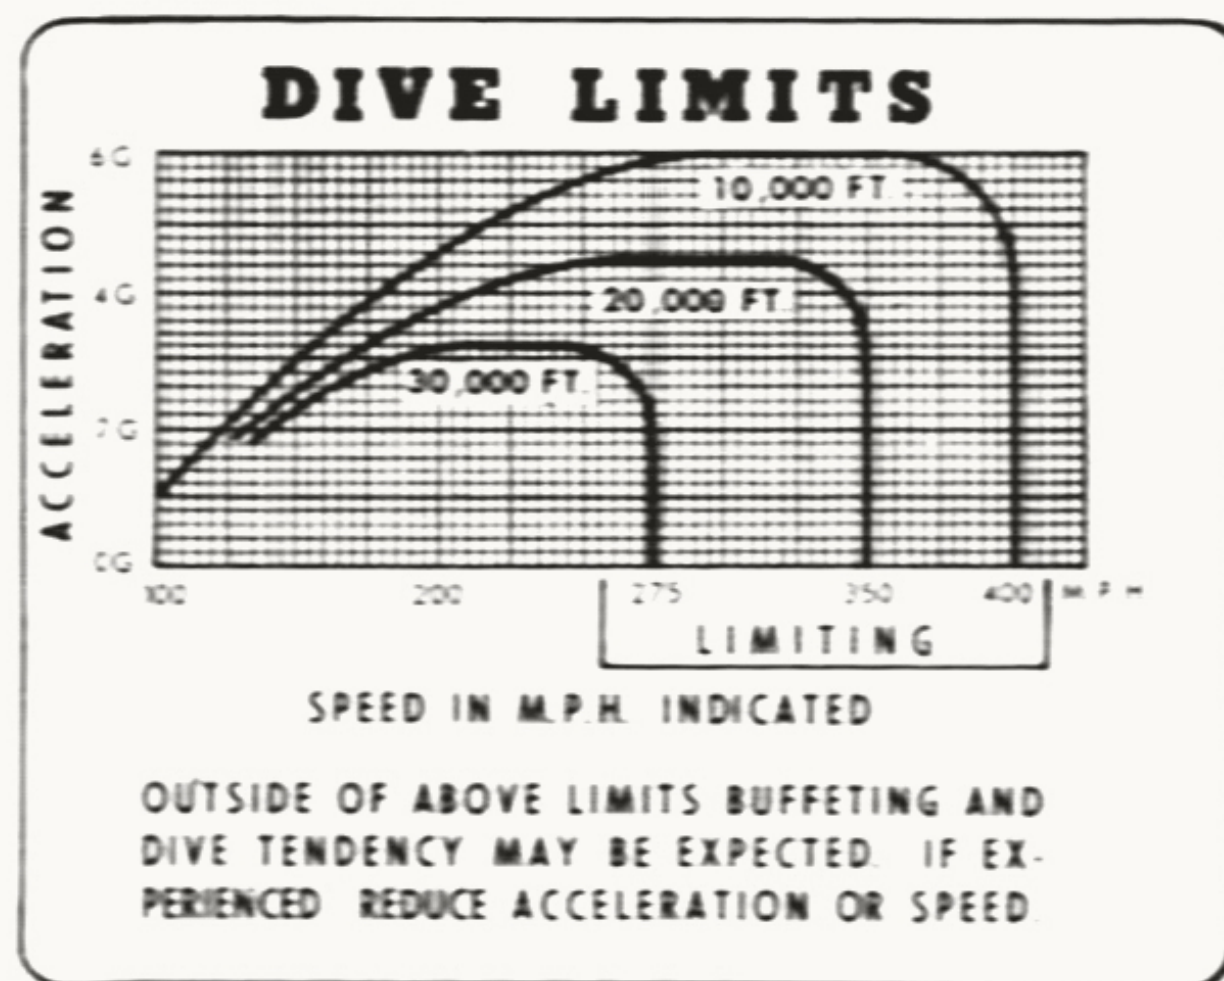

(Applicable With Nose Pitot Location)

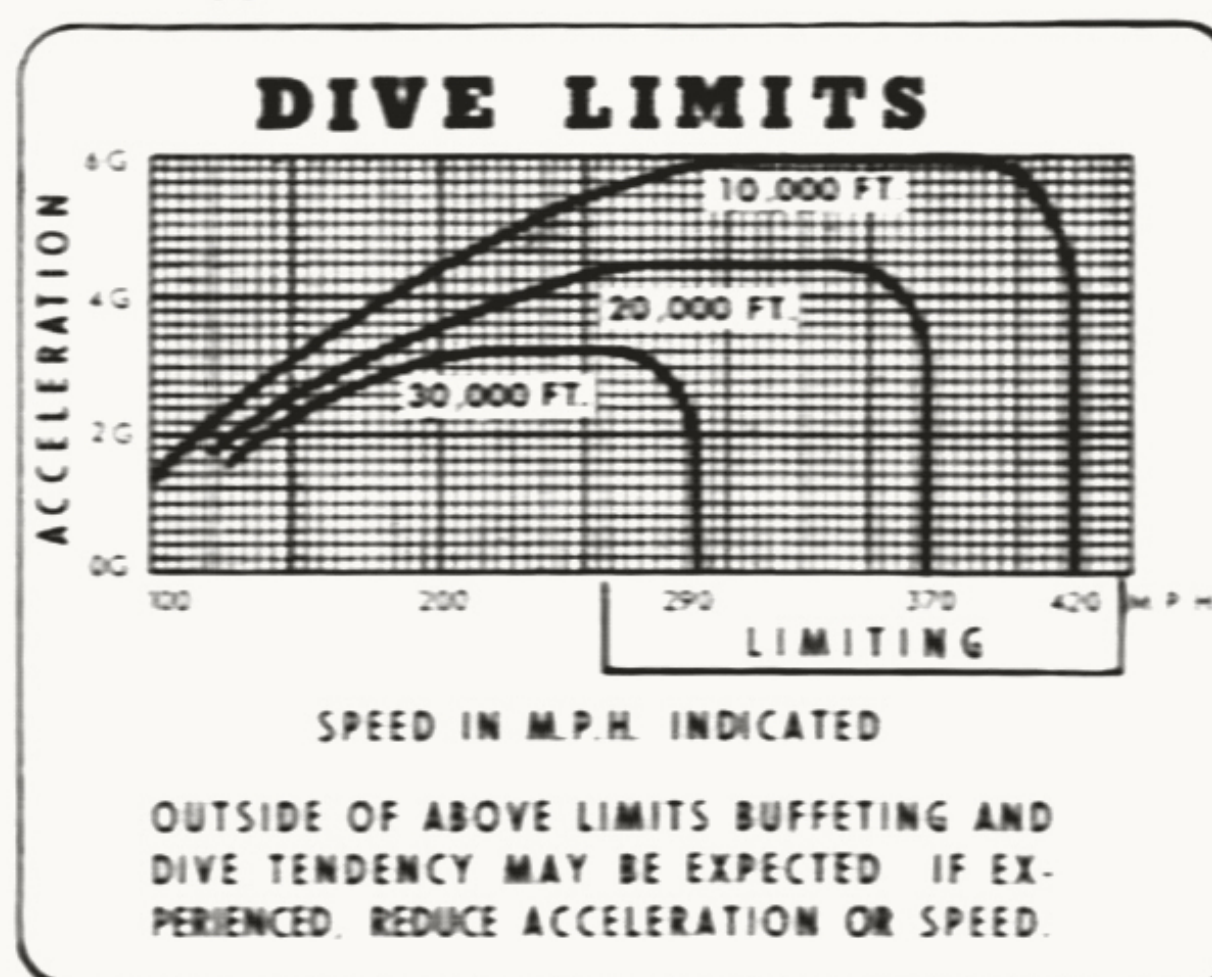

(Applicable With Wing Pitot Location)

FIGURE 24—DIVE LIMIT PLACARD

NOTE: To decrease the possibility of the engines malfunctioning and missing considerably, upon opening of the throttle, after the pull out from POWER OFF DIVES the following precautions will be rigidly observed:

"DO NOT CLOSE THE THROTTLE TO ALLOW A MANIFOLD PRESSURE OF LESS THAN 20 INCH HG DURING DIVE."

(3) Chances of exceeding placard speeds are minimized by diving at low engine power.

b. Engine speeds must not exceed 3120 rpm.

c. Diving must not be attempted with the flaps or landing gear down.

d. Trimming for dive.

Use the elevator tab to obtain comfortable control forces. At speeds within the placard, normal control forces exist.

19. NIGHT FLYING.

a. Refer to paragraph 2 a for instructions for turning on lights.

b. On airplanes later than 42-13067 and 43-2335 the landing lights (Fig. 5-10) may be turned "OFF" with the light extended. NEVER FLY ABOVE 150 MPH UNLESS THE LANDING LIGHT SWITCH IS IN THE "RETRACT" POSITION.

Aileron nibbling will be noticed with the landing light down — Don't be alarmed.

c. To operate identification lights if installed, turn the selector switch (Fig. 8-9) for the desired light to "STEADY", or to "KEY" and press the keying switch button (Fig. 8-7).

20. EMERGENCY EXIT.

In case of emergency, pull the emergency release handle (Fig. 11-1 or 23-4) or on P-38D airplanes rotate the RED handle on right side of the top hatch. This will disengage the pins securing the top hatch, allowing it to be carried away. Release the ratchet mechanism (Fig. 10-3 and 11-2) and push down the side windows, leaving the complete cockpit section open for egress.

21. APPROACH, LANDING AND CROSS WIND LANDING.

a. Turn the fuel boost pumps (Fig. 9-5) "ON".

b. Set mixture controls (Fig. 6-13) to "AUTO RICH".

c. Set propeller circuit breaker or propeller safety switches (Fig. 6-15) "ON". Set propeller selector switches (Fig. 6-2) to "AUTOMATIC". Set propeller governor levers (Fig. 6-3) to 2600 rpm position.

(1) If necessary to land with propellers in fixed pitch, set the propellers as follows. While flying not over 5000 feet above airport, operate inc-dec rpm switches (Fig. 6-2) and throttles to obtain 2600 rpm and a manifold pressure of 22 inches while flying at 180 mph. It will then be possible to apply take-off power without overspeeding the engine in case of a mislanding.

d. Adjust coolant radiator shutters (Fig. 6-14) and oil radiator shutters (Fig. 5-5) to prevent over cooling of the engine during approach.

e. Although the carburetors are inherently non-icing, it is possible for enough ice to accumulate on the

throttles to cause them to stick. This is likely to occur in glides with the throttles almost closed when icing conditions exist. As a prevention, accelerate the engines at frequent intervals so that the throttles do not stay in one position long enough to accumulate ice.

f. Lower the landing gear when the indicated airspeed is at or below 175 mph by moving the landing gear control lever (Fig. 6-7) "DOWN". Watch the landing gear indicator (Fig. 4-24) and note that the warning horn does not blow and the landing gear warning light (Fig. 6-11) does not glow when the throttle is closed and the gear is down and locked. Check nose gear down by looking at mirror on inboard side of nacelles. Check hydraulic pressure at 1200—1400 psi.

(1) EMERGENCY OPERATION OF LANDING GEAR. There are two individual systems provided for extending the landing gear in case of emergency.

(a) *Auxiliary System:* With the landing gear control lever (Fig. 6-7) in the "DOWN" position operate the hand hydraulic pump (Fig. 11-6) until the gear is extended. This system uses the normal hydraulic lines and derives its hydraulic fluid from a reserve supply carried in the main hydraulic reservoir. (See Fig. 17.)

NOTE: If main hydraulic system fails, pump flaps $\frac{1}{2}$ down before using auxiliary system to lower the landing gear (see Paragraph 20, g below).

(b) *Emergency System:* After having tried both systems described above, "CLOSE" the by-pass valve (Fig. 11-8) by turning it "CLOCKWISE", place the oil source selector valve lever (Fig. 11-9) in the "DOWN" position, and operate the hand pump until all three landing wheels are fully extended and locked. The emergency system is completely independent of the normal hydraulic system, having a separate oil tank and separate lines to the cylinders. The oil source selector valve lever (Fig. 11-9) is safetied in the "UP" position and directs oil to the hand pump from either the reserve supply in the main hydraulic tank or the emergency hydraulic tank. During normal operation some oil leaks from the main system into the emergency system. The by-pass valve (Fig. 11-8) allows this oil to flow back to the main hydraulic tank. This valve is safetied in the open position for normal operation. Refer to Fig. 18 for landing gear hydraulic diagram.

NOTE: The emergency extension system opens the landing gear doors by forcing them with the wheels; therefore after landing, the ground crew should be reminded to inspect the doors for damage and to service the emergency extension system.

CAUTION: Do not attempt to retract the landing gear by means of the emergency extension system.

g. Lower the flaps completely when the indicated airspeed is at or below 150 mph by moving the flap control lever (Fig. 8-1) to the "DOWN" position. Return the flap control lever to "CLOSED" when the flap indicator (Fig. 4-24) shows the flaps fully extended. On airplanes equipped with maneuvering flaps it will be necessary to move the flap control lever slightly forward of the "CLOSED" position and raise the trigger (Fig. 8-2) before the lever can be pulled back to the "DOWN" position.

(1) **EMERGENCY OPERATION OF FLAPS:** Extend the flaps $\frac{1}{2}$ down by placing the flap control lever in the "DOWN" position and operating the hand hydraulic pump (Fig. 10-6). Lower the landing gear (see paragraph 20, f), then lower the flaps completely. If the landing gear emergency extension system (Reference paragraph 20, f (1) (b) was used, raise the oil source selector valve lever (Fig. 10-9) to the "UP" position and leave the by-pass valve (Fig. 10-8) in the "CLOSED" position. This will maintain pressure on the landing gear cylinders, insuring that the landing gear down locks remain properly engaged.

b. Normal and power-on landings.

The normal approach is made at about 100-105 mph with 10 inches manifold pressure. Cut the throttle over the edge of the runway, flare the glide normally and make contact at about 75 mph. For the extremely short landing, use 15 inches manifold pressure and reduce approach speed to approximately 85-90 mph. Flare the glide, then close the throttle just as the airplane makes contact with the ground. After landing, hold the control column back for the first part of the landing roll. The brakes may be applied immediately, however, full braking will cause severe wear on the main wheel tires. Unless absolutely necessary, it is recommended that only moderate braking be used in the first part of the landing run. Extreme tail low landings with the flaps up may result in the fins striking the runway.

i. Cross wind landing.

Owing to the high landing speed and tricycle landing gear, this airplane may be safely landed in a cross wind. If the drift appears to be substantial, the effect of it may be reduced by banking to the windward side *until just before landing*.

j. Single engine landing.

When in good position for a *normal* approach and landing, lower the landing gear, then extend the flaps

about twenty-five percent. Set rudder tabs to "O". Use the power of the live engine and the rest of the flap travel to regulate the gliding angle. Concentrate on the angle of glide, because, once committed to landing, it is impossible to go around again with both landing gear and flaps down. Glide straight into the airport, lower the flaps completely when sure of proper approach, flare the glide, close the throttle and land.

Remember you can't use much power for single engine approach.

k. After landing set propeller governor levers (Fig. 6-3) to take-off position, adjust coolant shutters and oil shutters as necessary, retract flaps, and taxi to the line in accordance with paragraph 7.

l. Emergency take-off if landing is not completed.

(1) Open the throttles to take-off manifold pressure, (see "Specific Engine Flight Chart" in Section III), and after propeller rpm has stabilized, increase rpm to 2800 by adjusting the propeller governor controls (Fig. 6-3).

CAUTION: Pull the airplane up in a climb sufficient to stay below 150 mph indicated airspeed until the flaps are retracted.

(2) Retract the flaps and proceed in take-off technique as outlined in paragraph 8.

22. STOPPING OF ENGINES.

a. Apply toe brakes (Fig. 6-20) and pull parking brake handle (Fig. 5-17).

b. Turn fuel boost pumps (Fig. 9-5) "OFF".

c. Idle the engine at 600-800 rpm until the oil and coolant temperatures are appreciably below cruising temperature (Refer to "Specific Engine Flight Chart" in Section III). Normally these temperatures will be obtained during the glide for landing and taxiing.

d. If a cold weather (0°C. or 32°F.) start is anticipated, the oil system shall be diluted before stopping the engine. Operate engine at about 800 rpm and hold the oil dilution switches (Fig. 5-1) "ON" for about four minutes. Stop the engines in the normal manner, holding the oil dilution switches "ON" until the propellers stop turning.

If the engine oil temperature is above 40°C. (104°F.) upon completion of the diluting process, the

engine should be shut down and allowed to cool until the oil temperature is below 40°C. (104°F.). The engine should then be restarted and the same diluting process repeated. This will avoid possibility of evaporation due to the high temperature nullifying the effect of the first dilution.

e. Open throttles to obtain 1000-1200 rpm and move the mixture controls levers (Fig. 6-13) to "IDLE CUT-OFF".

f. When the propellers stop rotating, turn ignition switches (Fig. 5-6) "OFF". Leave mixture control levers in "IDLE CUT-OFF".

23. BEFORE LEAVING COCKPIT.

a. Turn fuel selector valves (Fig. 9-9 & 9-10) "OFF".

b. Place all cockpit light switches, pitot heater switch, instrument light switches, etc. in "OFF" position.

c. Turn airplane master switch (Fig. 5-3) "OFF".

d. If oxygen has been used during flight, turn regulator "OFF". (Refer to Section IV, paragraph 1.) Demand type regulators should be left with emergency knob (Fig. 27-7) "OFF" and the auto mix. lever (Fig. 27-3) "ON".

e. To set surface controls lock (Fig. 11-3), put rudders in neutral and place locking tube in clip provided (Fig. 7-2). Strap control wheel to center of surface control lock.

f. Make out Form 1.

24. AIR SPEED CORRECTION TABLE.

a. The airplanes described in this manual have the pitot mast located either under the left wing or under the fuselage nose. The "Flight Operation Instruction Charts" have been prepared for the wing pitot mast location. When flying an airplane with nose pitot location, correct indicated air speed value given on charts by using the following table:

b. Gear and Flaps UP—

Ship Reading mph								
Wing Pitot Location	125	150	175	200	225	250	275	300
Ship Reading mph								
Nose Pitot Location	131	154	176	197	218	240	264	289
Corrected Indicated								
Airspeed	136	158	180	200	220	242	265	290

c. Gear DOWN and Flaps UP—

Ship Reading mph								
Wing Pitot Location	100	110	120	130	140	150	160	
Ship Reading mph								
Nose Pitot Location	101	110	119	128	137	146	155	
Corrected Indicated								
Airspeed	115	123	132	140	149	158	166	

d. Gear and Flaps DOWN—

Ship Reading mph								
Wing Pitot Location	80	90	100	110	120	130	140	
Ship Reading mph								
Nose Pitot Location	80	85	94	102	110	119	128	
Corrected Indicated								
Airspeed	94	100	108	116	124	132	140	



SECTION III FLIGHT OPERATION DATA

1. WEIGHT AND BALANCE COMPUTATIONS.

a. Refer to the "Weight and Balance Chart" in this section for the applicable model airplane, and check the listed basic and alternate tabulated items against those loaded in the airplane. If the airplane is loaded in accordance with the "Basic Load Items" whose weights are entered in the "pounds" column, and the "Alternate Items" whose weights are entered under the various loaded conditions in the "Alternate Loading" columns, the gross weight will be found listed at the bottom of the chart. If any items tabulated in the pounds column

are omitted, or any items are added in computing the loading of the airplane, subtract or add the weight of the missing or added items from the "Gross Weight" and the answer will be the correct gross weight as the airplane is actually loaded.

b. The airplane balance is satisfactory for all alternate loading conditions shown in the "Weight and Balance Charts." As only a few changes in loading are possible, the following table will serve as a guide as to what items can be removed or added and what balance compensation is necessary.

REVISION	BALANCE COMPENSATION
Removal or use of external fuel.	None
Removal or use of main fuel (Rear wing tanks).	None
*Removal or use of reserve fuel (Front wing tanks).	None (If "Main" fuel burned first.)
Removal or use of ammunition.	None
Removal of armor.	None
Removal of <i>any</i> guns or <i>any</i> cameras.	Equivalent ballast <i>must be</i> securely strapped to the longerons in fuselage nose (see ballast chart on hood door).
Baggage— <i>not over the weight listed in the Weight and Balance Chart</i> for applicable model airplane under alternate load item.	None
Baggage—any amount over maximum allowable unballasted baggage.	14 lbs of ballast securely strapped to longerons in extreme fuselage nose for each additional 10 lbs. of baggage carried in the baggage compartment.
Any item of equipment added or removed which is located <i>not farther than 24 inches</i> forward or aft of the main wing beam. (Located immediately aft of pilot's seat.)	None
Any item of equipment added or removed which is located farther than 24 inches forward or aft of the main wing beam.	<i>Must be compensated</i> for with equivalent ballast. Check with squadron engineering officer for proper ballast.

*The fuel should be used in the following sequence: (1) Reserve wing tanks for fifteen minutes (see section II, para. 11f), (2) External tanks, (3) Main wing tanks, (4) Reserve wing tanks.

*The rules are simple and you
can get into lots of trouble
by not following them.*

WEIGHT & BALANCE CHART

MAXIMUM*

AIRPLANE MODELS

P-38D

BALANCE (C.G.) LIMITS
For any loading conditions

CONDITION	PERCENT MAC
TAKE-OFF	20.0 % to 28.5 %
LANDING	20.0 % to 28.5 %

These limits are for gear down

BASIC LOAD ITEMS

POUNDS

WEIGHT EMPTY, (INCLUDING :

11,700

FIXED GUN INSTALLATION (S): (4) 50 CAL 280.00 LB () CAL LB GUN SIGHT 3.00 LB
 FIXED CANNON INSTALLATION (S): (1) 37 MM 230.00 LB () MM LB

FLEXIBLE GUN INSTALLATION (S): () CAL none LB () CAL LB

FLEXIBLE CANNON INSTALLATION (S): () MM none LB () MM LB

510.00

EQUIPMENT: - NAVIGATION none LB PHOTOGRAPHIC none LB OXYGEN 10.00 LB

PYROTECHNICS (FLARES ETC) none LB

Armor-plate and bullet-proof glass 220# (Alternate load item)

230.00

CREW 1 (200 LB EA INCLUDING PARACHUTES) 200.00 LB OIL (17 US GAL 14 IMP GALL) 130.00 LB

330.00

TACTICAL WEIGHT EMPTY (C 26.1 % MAC)

12,800

ALTERNATE ITEMS**ALTERNATE LOADING (POUNDS)**MAXIMUM
FUEL

FUEL (6 LB PER US GAL - 72 LB PER IMPERIAL GALL) US GAL (IMP GALL)

Front Tanks 120 (100)

720.00

Rear Tanks 180 (150)

1080.00

() ()

() ()

() ()

() ()

() ()

EXTRA TANK (S) INSTALLATION None

EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 9 G (8 G)

70.00

BOMB INSTALLATION (S): INTERNAL () none LB

() EXTERNAL none LB OR () EXTERNAL LB

TORPEDO INSTALLATION none

AMMUNITION: 800 RDS 50 CAL 30S CAL

240.00

15 RDS 37 MM RDS MM

30.00

PASSENGERS none BAGGAGE (MAX) none LB

GROSS WEIGHT

14,900.

NOTE: 1% MAC = .84 INCHES

BALANCE (IN PERCENT MAC)

25.88%

*These limits must not be exceeded at any time during flight.

WEIGHT & BALANCE CHART

AIRPLANE MODELS

P-38E

MAXIMUM*

BALANCE (C.G.) LIMITS
For Any Loading Condition

TAKE-OFF 20.0% TO 28.5%

LANDING 20.0% TO 28.5%

These Limits are for Gear Down

BASIC LOAD ITEMS

POUNDS

WEIGHT EMPTY, INCLUDING:

11,780

 FIXED GUN INSTALLATION (S): (4) 50 CAL 292 LB () CAL LB GUN SIGHT 3.0 LB
 FIXED CANNON INSTALLATION (S): (1) 20 MM 206 LB () MM LB

 FLEXIBLE GUN INSTALLATION (S): () None CAL LB () CAL LB
 FLEXIBLE CANNON INSTALLATION (S): () None MM LB () MM LB

510

EQUIPMENT: - NAVIGATION None LB PHOTOGRAPHIC 5.0 LB OXYGEN 10.5 LB

PYROTECNICS (FLARES ETC.) None LB

Armor Plate & Bullet Proof Glass 235 Lb. (Alternate Load Item)

260

CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 US GAL 14 IMP GAL) 128 LB

350

TACTICAL WEIGHT EMPTY (C.G. 25.4% M.A.C.)

12,900

ALTERNATE ITEMS**ALTERNATE LOADING (POUNDS)**MAXIMUM
FUEL

FUEL (6 LB PER US GAL - 72 LB PER IMPERIAL GALL) U.S. GAL (IMP GALL)

Front Tanks

120 (100)

720.0

Rear Tanks

180 (150)

1,080.0

EXTRA TANK (S) INSTALLATION None

EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 9 G (8 G)

70

BOMB INSTALLATION (S): INTERNAL () None LB

() EXTERNAL LB OR () EXTERNAL LB

TORPEDO INSTALLATION

None

 AMMUNITION: 2,000 RDS 50 CAL RDS CAL 620.0
 150 RDS 20 MM RDS MM 100.0

PASSENGERS None BAGGAGE (MAX) None LB

GROSS WEIGHT

15,500

NOTE: 1% M.A.C. = 84 INCHES

BALANCE (IN PERCENT M.A.C.)

21.96%

*These limits must not be exceeded at any time during flight.

WEIGHT & BALANCE CHART

AIRPLANE MODELS

P-38F

MAXIMUM*

BALANCE (C.G.) LIMITS
For any loading conditions

CONDITION	PERCENT MAC
TAKE-OFF	20 % to 28.5 %
LANDING	20 % to 28.5 %

These limits are for gear down

BASIC LOAD ITEMS

POUNDS

WEIGHT EMPTY, (INCLUDING:)

12,070

FIXED GUN INSTALLATION (S): (4) 50 CAL 292.0 LB () CAL LB GUN SIGHT 3.0 LB
 FIXED CANNON INSTALLATION (S): (1) 20 MM 206.0 LB () MM LB

FLEXIBLE GUN INSTALLATION (S): () None CAL LB () CAL LB
 FLEXIBLE CANNON INSTALLATION (S): () None MM LB () MM LB

510

EQUIPMENT: - NAVIGATION None LB PHOTOGRAPHIC 5.00 LB OXYGEN 10.00 LB
 PYROTECHNICS (FLARES ETC) None LB

Armor-Plate and Bullet-Proof Glass - 235# (Alternate Load Item)

280

CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 U.S. GAL 14 IMP GALL) 128 LB

340

TACTICAL WEIGHT EMPTY (C.G. 25.2% MAC)

13,200

ALTERNATE ITEMS**ALTERNATE LOADING (POUNDS)**MAXIMUM
FUEL

FUEL (16 LB PER U.S. GAL - 72 LB PER IMPERIAL GALL) U.S. GAL (IMP GALL)
 Front Tanks 120 (100)
 Rear Tanks 180 (150)
 () ()
 () ()
 () ()

720

1,080

EXTRA TANK (S) INSTALLATION None

EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 9 (8)

70

BOMB INSTALLATION (S): INTERNAL () None LB

() EXTERNAL None LB OR () EXTERNAL LB

TORPEDO INSTALLATION None

AMMUNITION: 2000 RDS 50 CAL RDS CAL
 150 RDS 20 MM RDS MM

620

110

PASSENGERS None BAGGAGE (MAX) None LB

GROSS WEIGHT

15,800

NOTE: 1% MAC - 84 INCHES

BALANCE (IN PERCENT MAC)

21.89%

*These limits must not be exceeded at any time during flight.

WEIGHT & BALANCE CHART

AIRPLANE MODELS

P-38F-1-L0

MAXIMUM*
BALANCE (G.G.) LIMITS
For any loading condition

TAKE-OFF 20% - 28.5%

LANDING 20% - 28.5%

These limits are for Gear Down

BASIC LOAD ITEMS			POUNDS		
WEIGHT EMPTY, (INCLUDING :)			12,150		
FIXED GUN INSTALLATION (S): (4) 50 CAL 292.0 LB () CAL LB GUN SIGHT 2.0 LB					
FIXED CANNON INSTALLATION (S): (1) 20 MM 206.0 LB () MM LB					
FLEXIBLE GUN INSTALLATION (S): () None CAL LB () CAL LB					
FLEXIBLE CANNON INSTALLATION (S): () None MM LB () MM LB			530		
EQUIPMENT: - NAVIGATION None LB PHOTOGRAPHIC 5 LB OXYGEN 32.0 LB					
PYROTECHNICS (FLARES ETC) None LB					
Armor-Plate and Bullet-Proof Glass - 234.72# (Alternate Load Item)			280		
CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 U.S. GAL 14 IMP. GAL) 128 LB			340		
TACTICAL WEIGHT EMPTY (G.G. 26.03% M.A.C.)			13,300		
ALTERNATE ITEMS			ALTERNATE LOADING (POUNDS)		
			MAXIMUM FUEL	Full Fuel 150 Gal. Alt. Tanks	Full Fuel 300 Gal. Alt. Tanks
FUEL (6 LB. PER U.S. GAL - 7.2 LB. PER IMPERIAL GALL) U.S. GAL. (IMP. GALL)					
Front Tanks 120 (100)			720	720	720
Rear Tanks 180 (150)			1080	1080	1080
Alternate Tanks 300 (250)				1800	
Alternate Tanks 600 (500)					3600
EXTRA TANK (S) INSTALLATION				230	320
EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 9 (8)			70	70	70
BOMB INSTALLATION (S): INTERNAL () None LB					
() EXTERNAL None LB OR () EXTERNAL LB					
TORPEDO INSTALLATION None					
AMMUNITION: 2000 RDS 50 CAL RDS CAL			600	600	600
150 RDS 20 MM RDS MM			90	90	90
Radio Mast AN74 - 2#					
PASSENGERS None BAGGAGE (MAX) None LB					
GROSS WEIGHT			15,900	17,900	19,800
NOTE: 1% M.A.C. = .84 INCHES BALANCE (IN PERCENT M.A.C.)			22.58%	23.98%	25.03%

* These limits must not be exceeded at any time during flight.

WEIGHT & BALANCE CHART

AIRPLANE MODELS

P-38F-5-L0

MAXIMUM*

BALANCE (C.G.) LIMITS
For any loading condition

TAKE-OFF 20.0% TO 28.5%

LANDING 20.0% TO 28.5%

These limits are for Gear Down

BASIC LOAD ITEMS

POUNDS

WEIGHT EMPTY, INCLUDING:

12,260

FIXED GUN INSTALLATION (S): (4) 50 CAL 290.15 LB () CAL LB GUN SIGHT 2.80 LB

FIXED CANNON INSTALLATION (S): (1) 20 MM 192.20 LB () MM LB

FLEXIBLE GUN INSTALLATION (S): (None) CAL LB () CAL LB

FLEXIBLE CANNON INSTALLATION (S): (None) MM LB () MM LB

500

EQUIPMENT: - NAVIGATION None LB PHOTOGRAPHIC 5 LB OXYGEN 32 LB

PYROTECHNICS (FLARES ETC) None LB

Armor-Plate & Bullet-Proof Glass - 234.72# (Alternate Load Item)

280

CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 US GAL 14 IMP GAL) 128 LB

330

TACTICAL WEIGHT EMPTY (C.G. 25.96% MAC)

13,400

ALTERNATE ITEMS**ALTERNATE LOADING (POUNDS)**MAXIMUM
FUELFull Fuel
& 150 Gal
Alt. TanksFull Fuel
& 300 Gal
Alt. Tanks

FUEL (6 LB PER US GAL - 72 LB PER IMPERIAL GALL) US GAL (IMP GALL)

Front Tanks 120 (100)

Rear Tanks 180 (150)

Alternate Tanks 300 (250)

Alternate Tanks 600 (500)

720

720

720

1080

1080

1080

1800

3600

EXTRA TANK (S) INSTALLATION

230

320

EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 9 G (8 G)

70

70

70

BOMB INSTALLATION (S): INTERNAL (None) LB

() EXTERNAL None LB OR () EXTERNAL LB

TORPEDO INSTALLATION None

AMMUNITION: 2000 RDS 50 CAL RDS CAL

150 RDS 20 MM RDS MM

620

620

620

90

90

90

PASSENGERS None BAGGAGE (MAX) None LB

GROSS WEIGHT

16,000

18,000

19,900

NOTE: 1% MAC, 84 INCHES

BALANCE (IN PERCENT MAC)

22.33%

23.76%

24.83%

* These limits must not be exceeded at any time during flight

WEIGHT & BALANCE CHART**AIRPLANE MODELS**

P-38F-13-L0

P-38F-15-L0

P-38G-15-L0

MAXIMUM***BALANCE (C.G.) LIMITS**
For any loading condition

TAKE-OFF 20.0% TO 28.5%

LANDING 20.0% TO 28.5%

These limits are for Gear Down

BASIC LOAD ITEMS				POUNDS		
WEIGHT EMPTY, (INCLUDING :						
FIXED GUN INSTALLATION (SIC (4) 50 CAL 273 LB () CAL () LB GUN SIGHT 3.5 LB				12,200		
FIXED CANNON INSTALLATION (SIC (1) 20 MM 197 LB () MM () LB						
FLEXIBLE GUN INSTALLATION (SIC () CAL None LB () CAL () LB						
FLEXIBLE CANNON INSTALLATION (SIC () MM None LB () MM () LB				460		
EQUIPMENT: - NAVIGATION None LB PHOTOGRAPHIC 5.00 LB OXYGEN 41.50 LB						
PYROTECHNICS (FLARES ETC) None LB						
Armor Plate & Bullet-Proof Glass - 290# (Alternate Load Item)				320		
CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 U.S. GAL 14 IMP. GAL) 128 LB				320		
TACTICAL WEIGHT EMPTY (C.G. 28.82% MAC)				13,300		
ALTERNATE ITEMS				ALTERNATE LOADING (POUNDS)		
				MAXIMUM FUEL	Full Fuel 150 Gal. Alt. Tanks	Full Fuel 300 Gal. Alt. Tanks
FUEL (16 LB PER U.S. GAL - 72 LB PER IMPERIAL GAL) U.S. GAL (IMP. GAL)						
Front Tanks 120 (100)				720	720	720
Rear Tanks 180 (150)				1080	1080	1080
Alternate Tanks 300 (250)					1800	
Alternate Tanks 600 (500)						3600
() ()						
() ()						
EXTRA TANK (S) INSTALLATION					230	320
EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 7 G (6 G)				50	50	50
BOMB INSTALLATION (SIC: INTERNAL () None LB						
() EXTERNAL () LB OR () EXTERNAL () LB						
TORPEDO INSTALLATION						
None						
AMMUNITION: 2000 RDS 50 CAL RDS CAL				620	620	620
150 RDS 20 MM RDS MM				100	100	100
PASSENGERS None BAGGAGE (MAX) 30 LB				30	30	30
GROSS WEIGHT				15,900	17,900	19,800
NOTE: 1% MAC = 84 INCHES BALANCE (IN PERCENT MAC)				25.15%	26.26%	27.10%

*These limits must not be exceeded at any time during flight

WEIGHT & BALANCE CHART**AIRPLANE MODELS**

P-386-1-L0

P-386-3-L0

P-386-5-L0

P-386-10-L0

MAXIMUM*BALANCE (C.G.) LIMITS
For any loading condition

TAKE-OFF 20% to 28.5%

LANDING 20% to 28.5%

These limits are for Gear Down

BASIC LOAD ITEMS				POUNDS	
WEIGHT EMPTY, (INCLUDING :)				12,190	
FIXED GUN INSTALLATION (S): (4) 50 CAL 276.18 LB (1) CAL _____ LB GUN SIGHT 2.8 LB					
FIXED CANNON INSTALLATION (S): (1) 20 MM 186.37 LB (1) MM _____ LB					
FLEXIBLE GUN INSTALLATION (S): (1) None CAL _____ LB (1) CAL _____ LB					
FLEXIBLE CANNON INSTALLATION (S): (1) None MM _____ LB (1) MM _____ LB				460	
EQUIPMENT : - NAVIGATION None LB PHOTOGRAPHIC 5.00 LB OXYGEN 10.75 LB					
PYROTECNICS (FLARES ETC) None LB					
Armor-Plate & Bullet-Proof Glass - 223.00 (Alternate Load Item)				220	
CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 U.S. GAL 14 IMP. GAL) 128 LB				330	
TACTICAL WEIGHT EMPTY (C.G. 25.46% MAC)				13,200	
ALTERNATE ITEMS			ALTERNATE LOADING (POUNDS)		
			MAXIMUM FUEL	Full Fuel (150 Gal. Drop. Tanks)	Full Fuel (300 Gal. Drop. Tanks)
FUEL (6 LB. PER U.S. GAL - 7.2 LB. PER IMPERIAL GAL)			U.S. GAL	(IMP. GAL)	
Front Tanks			120	(100)	
Rear Tanks			180	(150)	
Alternate Tanks			300	(250)	
Alternate Tanks			600	(500)	
EXTRA TANK (S) INSTALLATION				230	320
EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN)			9 G (8 G)	70	70
BOMB INSTALLATION (S): INTERNAL () None LB					
() EXTERNAL _____ LB OR () EXTERNAL _____ LB					
TORPEDO INSTALLATION None					
AMMUNITION : 2000 RDS. 50 CAL _____ RDS. _____ CAL			620	620	620
150 RDS. 20 MM _____ RDS. _____ MM			90	90	90
PASSENGERS None BAGGAGE (MAX) None LB					
Recognition Device - 3.50#					
Reflector Shade - 1#; Damped Rate Control - 2.50#;			10	10	10
GROSS WEIGHT			15,800	17,800	19,700
NOTE: 1% M.A.C. = .84 INCHES BALANCE (IN PERCENT M.A.C.)			21.89%	23.37%	24.49%

* These limits must not be exceeded at any time during flight.

WEIGHT & BALANCE CHART

AIRPLANE MODELS

F-4

MAXIMUM*BALANCE (C.G.) LIMITS
For any loading condition

CONDITION	PERCENT MAC
TAKE-OFF	20.0% - 28.5%
LANDING	20.0% TO 28.5%

These limits are for gear down

BASIC LOAD ITEMS

POUNDS

WEIGHT EMPTY, (INCLUDING :

11,910

 FIXED GUN INSTALLATION (S): () None CAL _____ LB () _____ CAL _____ LB GUN SIGHT None LB
 FIXED CANNON INSTALLATION (S): () None MM _____ LB () _____ MM _____ LB

 FLEXIBLE GUN INSTALLATION (S): () None CAL _____ LB () _____ CAL _____ LB
 FLEXIBLE CANNON INSTALLATION (S): () None MM _____ LB () _____ MM _____ LB

EQUIPMENT : - NAVIGATION None LB PHOTOGRAPHIC 239.70 LB OXYGEN 28.30 LB

PYROTECHNICS (FLARES ETC) None LB

Armor Plate & Bullet-Proof Glass 219 Lbs. (Alternate Load Item)

490

CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 US GAL 14 IMP GALL) 128 LB

300

TACTICAL WEIGHT EMPTY (C.G. 25.96% MAC)

12,700

ALTERNATE ITEMS**ALTERNATE LOADING (POUNDS)**

MAXIMUM FUEL	Full Fuel & 75 Gal. Drop. Tanks	Full Fuel & 150 Gal. Drop. Tanks	Full Fuel & 300 Gal. Drop. Tanks
--------------	---------------------------------	----------------------------------	----------------------------------

FUEL (6 LB PER US GAL. - 7.2 LB PER IMPERIAL GALL)	U.S. GAL.	(IMP GALL)
Front Tanks	120	(100)
Rear Tanks	180	(150)
Alternate Tanks	150	(125)
Alternate Tanks	300	(250)
Alternate Tanks	600	(500)
		()

EXTRA TANK (S) INSTALLATION

130 230 330

EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 9 G (8 G)

70 70 70 70

BOMB INSTALLATION (S): INTERNAL () None LB

() EXTERNAL _____ LB OR () EXTERNAL _____ LB

TORPEDO INSTALLATION None

 AMMUNITION : None RDS _____ CAL _____ RDS _____ CAL
 None RDS _____ MM _____ RDS _____ MM

PASSENGERS None BAGGAGE (MAX) None LB

GROSS WEIGHT

14,500 15,600 16,600 18,500

WING: 1% MAC - 84 INCHES

BALANCE (10 PERCENT MAC)

27.93% 28.39% 28.78% 29.42%

* These limits must not be exceeded at any time during flight.

WEIGHT & BALANCE CHART

AIRPLANE MODELS

F-4A

MAXIMUM*
BALANCE (C.G.) LIMITS
 For any loading condition

CONDITION PERCENT MAC

TAKE-OFF 20.0% TO 28.5%

LANDING 20.0% TO 28.5%

These limits are for Gear Down

BASIC LOAD ITEMS**POUNDS**

WEIGHT EMPTY, (INCLUDING :

11,990

FIXED GUN INSTALLATION (S): () None CAL LB () CAL LB GUN SIGHT None LB

FIXED CANNON INSTALLATION (S): () None MM LB () MM LB

FLEXIBLE GUN INSTALLATION (S): () None CAL LB () CAL LB

FLEXIBLE CANNON INSTALLATION (S): () None MM LB () MM LB

EQUIPMENT: - NAVIGATION None LB PHOTOGRAPHIC 239.70 LB OXYGEN 28.30 LB

PYROTECHNICS (FLARES ETC) None LB

Armor-Plate & Bullet-Proof Glass - 219# (Alternate Load Item) 480

CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 US GAL 14 IMP GALL) 128 LB 330

TACTICAL WEIGHT EMPTY (C.G. 25.60% MAC)

12,800

ALTERNATE ITEMS**ALTERNATE LOADING (POUNDS)**

MAXIMUM
FUEL

Full Fuel
(150 Gal)
Drop Tanks

Full Fuel
(300 Gal)
Drop Tanks

FUEL (16 LB PER US GAL - 72 LB PER IMPERIAL GALL) U.S. GAL (IMP GALL)

Front Tanks 120 (100)

Rear Tanks 180 (150)

Alternate Tanks 300 (250)

Alternate Tanks 600 (500)

() ()

() ()

EXTRA TANK (S) INSTALLATION

230 320

EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 9 G (8 G)

70 70 70

BOMB INSTALLATION (S): INTERNAL () None LB

() EXTERNAL None LB OR () EXTERNAL LB

TORPEDO INSTALLATION None

AMMUNITION: None RDS CAL RDS CAL

None RDS. MM RDS. MM

PASSENGERS None BAGGAGE (MAX) 30 LB

30 30 30

GROSS WEIGHT

14,700 16,700 18,600

NOTE: 1% MAC - 84 INCHES

BALANCE (IN PERCENT MAC)

28.06% 28.90% 29.52%

* These limits must not be exceeded at any time during flight.

WEIGHT & BALANCE CHART**AIRPLANE MODELS**

F-5A-1-L0

F-5A-3-L0

F-5A-10-L0

MAXIMUM*
BALANCE (C.G.) LIMITS
 For any loading condition

CONDITION PERCENT MAC
 TAKE-OFF 20.0% to 28.5%

LANDING 20.0% to 28.5%

These limits are for Gear Down

BASIC LOAD ITEMS**POUNDS**

WEIGHT EMPTY, (INCLUDING :

12,200

FIXED GUN INSTALLATION (S): () None CAL _____ LB () _____ CAL _____ LB GUN SIGHT None LB

FIXED CANNON INSTALLATION (S): () None MM _____ LB () _____ MM _____ LB

FLEXIBLE GUN INSTALLATION (S): () None CAL _____ LB () _____ CAL _____ LB

FLEXIBLE CANNON INSTALLATION (S): () None MM _____ LB () _____ MM _____ LB

EQUIPMENT: - NAVIGATION None LB PHOTOGRAPHIC 315.70 LB OXYGEN 29.30 LB

PYROTECHNICS (FLARES ETC) None LB

Armor-Plate & Bullet-Proof Glass - 219# (Alternate Load Item) 560

CREW 1 (200 LB EA INCLUDING PARACHUTES) 200 LB OIL (17 US GAL 18 IMP GALL) 128 LB 340

TACTICAL WEIGHT EMPTY (C.G. 24.66% MAC)

13,100

ALTERNATE ITEMS**ALTERNATE LOADING (POUNDS)**

MAXIMUM
FUEL

Full Fuel
150 GAL
Alt. Tanks

Full Fuel
300 GAL
Alt. Tanks

FUEL (16 LB PER US GAL - 72 LB PER IMPERIAL GALL) U.S. GAL (IMP GALL)

Front Tanks 120 (100)

Rear Tanks 180 (150)

Alternate tanks 300 (250)

Alternate tanks 600 (500)

() ()

() ()

EXTRA TANK (S) INSTALLATION

EXTRA OIL (AS REQUIRED - MAXIMUM IS SHOWN) 9 (8)

BOMB INSTALLATION (S): INTERNAL () None LB

() EXTERNAL _____ LB OR () EXTERNAL _____ LB

TORPEDO INSTALLATION None

AMMUNITION: None RDS _____ CAL _____ RDS _____ CAL

None RDS _____ MM _____ RDS _____ MM

PASSENGERS None BAGGAGE (MAX) 30 LB

GROSS WEIGHT

15,000

17,000

18,900

NOTE: 1% MAC = .84 INCHES

BALANCE (IN PERCENT MAC)

27.19%

28.12%

28.82%

* These limits must not be exceeded at any time during flight.

SPECIFIC ENGINE FLIGHT CHART

AIRPLANE MODELS

P-38D, P-38E

F-4

ENGINE MODELS

V-1710-27 (R.H.)

V-1710-29 (L.H.)

(INTAKE PORT SCREEN NOT INSTALLED)

CONDITION	FUEL PRESSURE LB./SQ. IN.	OIL PRESSURE LB./SQ. IN.	OIL TEMP. °C	COOLANT TEMP. °C			MAX. PERMISSIBLE DIVING R.P.M.	
DESIRED	12-16	60-70	60-80	105-115			CONDITION	ALLOWABLE OIL CONSUMPTION
MAXIMUM	16	85	95	125			"MAX CONTINUOUS"	22 IMP. PT./HR. 13 US. QT./HR.
MINIMUM	12	55		85			"ECONOMICAL MAX"	15 IMP. PT./HR. 9 US. QT./HR.
IDLING	9	15					"MIN. CRUISING"	12 IMP. PT./HR. 7 US. QT./HR.
							OIL GRADE: (S)	1120 (W) 1120

SUPERCHARGER TYPE: EXHAUST TURBINE DRIVEN

FUEL OCTANE 100

OPERATING CONDITION	R.P.M.	MANIF. PRESS. (BOOST.)	HORSE POWER	CRITICAL ALTITUDE (FEET)	BLOWER SPEED	USE LOW BLOWER BELOW	MIXTURE CONTROL POSITION	FUEL FLOW (GAL./HR./ENG.)		MAXIMUM CYL. TEMP.		MAXIMUM DURATION (MINUTES)	REMARKS
								U.S.	IMP.	°C	°F		
TAKE-OFF	3000	40.3	1150	25,000	SINGLE SPEED BLOWER	FT. ALT.	AUTO RICH	115	96	SEE COOLANT TEMPERATURE		5 MIN.	
EMERGENCY MAXIMUM	3000	40.3	1150	25,000		FT. ALT.	AUTO RICH	115	96			5 MIN.	REDUCE MANIFOLD PRESSURE 1 INCH PER 1000 FT ABOVE 25000 FT
MAXIMUM CONTINUOUS	2600	37	1000	28,000		FT. ALT.	AUTO RICH	90	75			NO LIMIT	REDUCE MANIFOLD PRESSURE 1 INCH PER 1000 FT ABOVE 28000 FT
ECONOMICAL MAXIMUM	2300	29	670	30,000		FT. ALT.	AUTO RICH OR LEAN	52 47	43 39			NO LIMIT	
TYPICAL CRUISING	2200	28	600	20,000		FT. ALT.	AUTO LEAN	42	35			NO LIMIT	
MINIMUM CRUISING	1600 1800 1850 2150 2300	20 21 22 21 23	325 350 380 450 535	SEA LEVEL 5,000 10,000 20,000 30,000		FT. ALT.	AUTO LEAN	26 28 30 37 43	22 23 25 31 36			NO LIMIT	

CONDITIONS TO AVOID

OPERATION BELOW 1600 RPM RESULTS IN INSUFFICIENT GENERATOR OUTPUT.
CAUTION: WHEN OPERATING ABOVE 2300 RPM, CRITICAL ALTITUDE IS REACHED
AT PART THROTTLE DUE TO TURBO SPEED LIMITATIONS.

NOTE: CRITICAL ALTITUDE IS THE MAXIMUM TO WHICH THE POWER SHOWN CAN BE TAKEN.

SPEC. AN-H-8 DEC. 18, 1942		FORM ASC-112		AIRPLANE MODELS P-38F SERIES F-4A		SPECIFIC ENGINE FLIGHT CHART		ENGINE MODELS V-1710-49 (R.H.) V-1710-53 (L.H.) (INTAKE PORT SCREENS NOT INSTALLED)													
CONDITION		FUEL PRESSURE (LB./SQ. IN.)	OIL PRESSURE (LB./SQ. IN.)	OIL TEMP. °C °F		COOLANT TEMP. °C °F		MAX. PERMISSIBLE DIVING RPM: 3120													
DESIRED		12-16	60-70	60-80 140-170 105-115 221-239				<table border="1"> <thead> <tr> <th>CONDITION</th> <th colspan="2">ALLOWABLE OIL CONSUMPTION</th> </tr> </thead> <tbody> <tr> <td>MAX. CONT.</td> <td>13 U.S.QT./HR.</td> <td>22 IMP.PT./HR</td> </tr> <tr> <td>MAX. CRUISE</td> <td>9 U.S.QT./HR.</td> <td>15 IMP.PT./HR</td> </tr> <tr> <td>MIN. SPECIFIC</td> <td>7 U.S.QT./HR.</td> <td>12 IMP.PT./HR</td> </tr> </tbody> </table>		CONDITION	ALLOWABLE OIL CONSUMPTION		MAX. CONT.	13 U.S.QT./HR.	22 IMP.PT./HR	MAX. CRUISE	9 U.S.QT./HR.	15 IMP.PT./HR	MIN. SPECIFIC	7 U.S.QT./HR.	12 IMP.PT./HR
CONDITION	ALLOWABLE OIL CONSUMPTION																				
MAX. CONT.	13 U.S.QT./HR.	22 IMP.PT./HR																			
MAX. CRUISE	9 U.S.QT./HR.	15 IMP.PT./HR																			
MIN. SPECIFIC	7 U.S.QT./HR.	12 IMP.PT./HR																			
MAXIMUM		16	85	95 203 125 257																	
MINIMUM		12	55	85 185																	
IDLING		9	15					OIL GRADE: (S) 1120 (W) 1120													
SUPERCHARGER TYPE: EXHAUST-DRIVEN TURBINE					FUEL GRADE: 100 OCTANE																
OPERATING CONDITION	RPM	MANIFOLD PRESSURE (BOOST)	HORSE-POWER	CRITICAL ALTITUDE WITH RAM NO RAM		BLOWER	USE LOW BLOWER BELOW	MIXTURE CONTROL POSITION	FUEL FLOW (GAL./HR./ENG.) U.S. IMP.	MAXIMUM CYL. TEMP. °C °F		MAXIMUM DURATION (MINUTES)									
TAKE-OFF	3000	44.5	1240	21,000		SINGLE SPEED		A.R.	135 112			5*									
WAR EMERGENCY		NOT POSSIBLE ON						THESE AIRPLANES													
MILITARY	3000	47.0	1325	15,000				A.R.	148 123			5**									
MAXIMUM CONTINUOUS	2600	38	1000	27,000				A.R.	100 83			...									
MAXIMUM CRUISE	2300	29	670	30,000				A.R. or LEAN	53 44 49 41												
MINIMUM SPECIFIC CONSUMPTION	1600 1800 1800 1870 2200	21 23 24 25 25	325 350 380 450 535	SEA LEVEL 5,000 10,000 20,000 30,000				AUTO LEAN	25 21 26 22 29 24 34 28 40 33												
REMARKS: * Use Military rated for War Emergency Take-off ** At 20,000 ft., use 47 in. M.P.; at 30,000 ft., use 35 in. M.P.; at 40,000 ft., use 20 in. M.P. *** At 30,000 ft., use 47 in. M.P.; at 35,000 ft., use 30 in. M.P.; at 40,000 ft., use 20 in. M.P.																					

SPEC. AN-H-8 DEC. 18, 1942		FORM ASC-412		AIRPLANE MODELS P-38G SERIES F-5A SERIES		SPECIFIC ENGINE FLIGHT CHART		ENGINE MODELS V-1710-51 (R.H.) V-1710-55 (L.H.) (INTAKE PORT SCREENS NOT INSTALLED)						
CONDITION	FUEL PRESSURE (LB./SQ. IN.)	OIL PRESSURE (LB./SQ. IN.)	OIL TEMP.		COOLANT TEMP.		MAX. PERMISSIBLE DIVING RPM: ... 3120 ...							
			°C	°F	°C	°F	CONDITION	ALLOWABLE OIL CONSUMPTION						
DESIRED	12-16	60-70	80-80	140-176	105-115	221-230	MAX. CONT.	... 13 ... U.S.QT/HR ... 22 ... IMP.PT/HR						
MAXIMUM	16	85	95	203	125	257	MAX. CRUISE	... 9 ... U.S.QT/HR ... 15 ... IMP.PT/HR						
MINIMUM	12	55			85	185	MIN. SPECIFIC	... 7 ... U.S.QT/HR ... 12 ... IMP.PT/HR						
IDLING	9	15					OIL GRADE: (S) ... 1120 ... (W) ... 1120 ...							
SUPERCHARGER TYPE: EXHAUST-DRIVEN TURBINE					FUEL GRADE: 100 OCTANE									
OPERATING CONDITION	RPM	MANIFOLD PRESSURE (BOOST)	HORSE-POWER	CRITICAL ALTITUDE		BLOWER	USE LOW BLOWER BELOW:	MIXTURE CONTROL POSITION	FUEL FLOW (GAL/HR/ENG.)		MAXIMUM CYL. TEMP.		MAXIMUM DURATION (MINUTES)	
				WITH RAM	NO RAM				U.S.	IMP.	°C	°F		
TAKE-OFF	3000	44.5	1240	21,000		SINGLE SPEED		A.R.	135	112			5*	
WAR EMERGENCY		NOT POSSIBLE	ON					THESE AIRPLANES						
MILITARY	3000	51	1425	15,000				A.R.	150	132				**
MAXIMUM CONTINUOUS	2600	41	1100	24,000				A.R.	115	96				***
MAXIMUM CRUISE	2300	31	740	30,000				A.R. or LEAN	63 58	52 48				
MINIMUM SPECIFIC CONSUMPTION	1600 1600 1600 1870 2200	21 23 24 25 25	325 350 380 450 535	SEA LEVEL 5,000 10,000 20,000 30,000				AUTO LEAN	25 26 29 34 40	21 22 24 28 33				
REMARKS: <ul style="list-style-type: none"> * Use Military Rated for War Emergency Take-off. ** At 20,000 ft., use 47 in. M.P.; at 30,000 ft., use 35 in. M.P.; at 40,000 ft., use 20 in. M.P. *** At 30,000 ft., use 35 in. M.P.; at 35,000 ft., use 30 in. M.P.; at 40,000 ft., use 20 in. M.P. 														

AIRPLANE MODELS

P-38D, P-38E, F4

TAKE-OFF, CLIMB & LANDING CHART

ENGINE MODELS

V-1710-27(RH)

V-1710-29(LH)

TAKE-OFF DISTANCE (IN FEET)

GROSS WEIGHT (IN LBS)	HEAD WIND (MPH)	HARD SURFACE RUNWAY						BOD - TURF RUNWAY						SOFT SURFACE RUNWAY					
		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.	
		GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.
15000	0	1010	1680	1250	2090	1540	2570	1040	1730	1300	2160	1800	2660	1120	1860	1420	2360	1770	2930
	20	730	1220	910	1620	1150	1920	770	1280	960	1600	1190	1980	830	1380	1050	1750	1340	2230
	40	450	750	560	940	760	1260	480	810	600	1000	780	1300	540	900	690	1150	910	1520
17000	0	1350	2250	1690	2820	2080	3460	1390	2310	1760	2940	2160	3600	1520	2530	1970	3290	2430	4050
	20	1000	1660	1260	2100	1590	2650	1020	1700	1330	2220	1650	2750	1140	1900	1500	2500	1840	3240
	40	630	1050	840	1400	1100	1840	690	1150	910	1510	1160	1930	780	1300	1080	1800	1470	2450
19000	0	1750	2920	2210	3680	2760	4600	1820	3040	2310	3850	2920	4870	2040	3400	2640	4400	3120	5200
	20	1320	2200	1680	2800	2220	3700	1380	2300	1800	3000	2340	3900	1560	2600	2110	3520	2580	4300
	40	900	1500	1180	1980	1660	2760	940	1570	1290	2150	1760	2940	1080	1800	1560	2600	1850	3250

NOTE: INCREASE DISTANCE 10% FOR EACH 10° (20° F) ABOVE 0° (32° F)

ENGINE LIMITS FOR TAKE-OFF 3000 RPM @ 40.3 IN. HG

CLIMB DATA

COMBAT MISSIONS USE 43000 RPM @ 40.3 IN. HG

FERRY MISSIONS USE 2300 RPM @ 29 IN. HG

GROSS WEIGHT (IN LBS)	TYPE OF CLIMB	0 TO 5,000 FT. ALT.			10,000 FT. ALT.				15,000 FT. ALT.				20,000 FT. ALT.				25,000 FT. ALT.				BLOWER CHANGE
		BEST I.A.S.	FT./MIN.	TIME FROM SL	BEST I.A.S.	FT./MIN.	TIME FROM SL	FUEL FROM SL	BEST I.A.S.	FT./MIN.	TIME FROM SL	FUEL FROM SL	BEST I.A.S.	FT./MIN.	TIME FROM SL	FUEL FROM SL	BEST I.A.S.	FT./MIN.	TIME FROM SL	FUEL FROM SL	
15000	COMBAT FERRY	145	2900	2	140	2700	4	43	140	2100	6	51	130	1800	11	67	125	400	23	98	
		145	1400	4	140	1300	8	42	140	1200	11	49	130	900	21	65	125	-----	-----	-----	
17000	COMBAT FERRY	155	2300	3	150	2100	5	47	150	1800	8	56	140	1000	15	79	135	-----	-----	-----	
		155	1000	5	150	900	11	47	150	800	16	58	140	400	33	67	135	-----	-----	-----	
19000	COMBAT FERRY	165	1900	3	160	1400	6	50	160	1200	10	62	150	600	21	97	145	-----	-----	-----	
		165	700	7	160	600	15	55	160	500	24	71	150	100	56	143	145	-----	-----	-----	

NOTE: INCREASE ELAPSED CLIMBING TIME 5% FOR EACH 10° (20° F) ABOVE 0° (32° F) FREE AIR TEMPERATURE. FUEL INCLUDES WARM-UP AND TAKE-OFF ALLOWANCE

LANDING DISTANCE (IN FEET)

GROSS WEIGHT (IN LBS)	BEST I.A.S. APPROACH	HARD DRY SURFACE						FIRM DRY BOD						WET OR SLIPPERY					
		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.	
		TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL
13000	100	2440	1280	2660	1400	2800	1530	2690	1430	2830	1570	3100	1730	4370	3210	4640	3580	5360	3990
14500	105	2660	1400	2900	1530	3170	1680	2820	1570	3090	1720	3380	1890	4810	3550	5330	3960	5910	4420

NOTE: FOR GROUND YAW BRAKING ABOVE 35° (95° F) INCREASE APPROACH I.A.S. 10% AND ALLOW 50% INCREASE IN GROUND ROLL.

REMARKS

* FOR COMBAT CLIMB, REDUCE TO 2600 RPM AND 37.2 INCHES OF MANIFOLD PRESSURE WITHIN FIVE MINUTES. AND REDUCE MANIFOLD PRESSURE 1 INCH PER 1000 FEET ABOVE 20,000 FEET.

LEGEND

I.A.S. — INDICATED AIR SPEED
NOTE: ALL DISTANCES ARE AVERAGE, AND SUBJECT TO CONSIDERABLE VARIATIONS BECAUSE OF DIFFERENCES IN PILOT TECHNIQUE, LOAD, ETC., ETC.
RED FIGURES HAVE NOT BEEN FLIGHT CHECKED.

AIRPLANE MODELS

P-38F SERIES
F-4A

ENGINE MODELS

V-1710-49(RH)
V-1710-53(LH)

TAKE-OFF, CLIMB & LANDING CHART

TAKE-OFF DISTANCE (IN FEET)

GROSS WEIGHT (IN LBS)	HEAD WIND (MPH)	HARD SURFACE RUNWAY						SOD - TURF RUNWAY						SOFT SURFACE RUNWAY					
		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.	
		GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.
15,500	0	1090	1810	1360	2270	1670	2790	1120	1870	1410	2340	1750	2910	1230	2040	1540	2570	1950	3240
	20	790	1320	1010	1680	1260	2100	820	1360	1050	1740	1330	2210	890	1480	1140	1900	1480	2470
	40	490	810	640	1060	840	1390	500	840	670	1120	890	1480	550	920	730	1220	1020	1700
17,500	0	1440	2400	1830	3040	2230	3710	1500	2490	1900	3160	2320	3870	1650	2740	2120	3540	2660	4440
	20	1070	1790	1390	2310	1720	2860	1110	1850	1440	2390	1810	3010	1220	2030	1630	2710	2140	3560
	40	700	1150	940	1560	1190	1980	720	1200	960	1600	1290	2140	800	1330	1110	1840	1600	2660
19,500	0	1880	3130	2380	3970	2960	4930	1960	3260	2510	4180	3050	5080	2190	3640	2940	4900	3180	5300
	20	1420	2370	1860	3100	2420	4040	1480	2470	1980	3300	2510	4180	1680	2800	2400	4000	2650	4420
	40	950	1580	1330	2220	1870	3120	990	1650	1450	2410	1960	3260	1150	1920	1860	3100	2040	3400

NOTE: INCREASE DISTANCE 10% FOR EACH 10°C (20°F) ABOVE 0°C (32°F)

ENGINE LIMITS FOR TAKE-OFF 2800 RPM & 44.5 IN. HG

CLIMB DATA

COMBAT MISSIONS USE * 2800 RPM & 44.5 IN. HG

FERRY MISSIONS USE 2300 RPM & 29.3 IN. HG

GROSS WEIGHT (IN LBS)	TYPE OF CLIMB	5,000 FT. ALT.			10,000 FT. ALT.				15,000 FT. ALT.				25,000 FT. ALT.				35,000 FT. ALT.				BLOWER CHANGE
		B.L. TO 5,000 FT. ALT.			10,000 FT. ALT.				15,000 FT. ALT.				25,000 FT. ALT.				35,000 FT. ALT.				
		BEST I.A.S.	FT./MIN.	TIME FROM SL.	BEST I.A.S.	FT./MIN.	TIME FROM SL.	FUEL FROM SL.	BEST I.A.S.	FT./MIN.	TIME FROM SL.	FUEL FROM SL.	BEST I.A.S.	FT./MIN.	TIME FROM SL.	FUEL FROM SL.	BEST I.A.S.	FT./MIN.	TIME FROM SL.	FUEL FROM SL.	
15,500	COMBAT FERRY	145	2900	2	145	2700	4	49	140	2000	6	57	135	1400	12	77	130	300	27	117	
		145	1300	4	145	1300	8	47	140	1200	12	55	135	800	22	72	130	—	—	—	
17,500	COMBAT FERRY	155	2400	3	155	2200	5	52	150	1500	8	63	145	900	16	91	135	—	—	—	
		155	900	6	155	900	11	53	150	700	17	65	145	400	37	100	135	—	—	—	
19,500	COMBAT FERRY	170	1900	3	165	1300	6	57	160	1100	10	71	155	600	22	112	145	—	—	—	
		170	600	8	165	500	16	63	160	400	27	81	155	100	—	—	145	—	—	—	

NOTE: INCREASE ELAPSED CLIMBING TIME 5% FOR EACH 10°C (20°F) ABOVE 0°C (32°F) FREE AIR TEMPERATURE. FUEL INCLUDES WARM-UP AND TAKE-OFF ALLOWANCE

LANDING DISTANCE (IN FEET)

GROSS WEIGHT (IN LBS)	BEST I.A.S. APPROACH	HARD DRY SURFACE						FIRM DRY SOD						WET OR SLIPPERY					
		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.	
		TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL
13,500	100	2510	1320	2740	1450	2990	1580	2660	1470	2920	1630	3190	1780	4520	3320	5000	3710	5550	4140
15,000	105	2730	1440	2980	1580	3260	1730	2900	1610	3170	1770	3480	1950	4950	3670	5490	4090	6100	4570

NOTE: FOR GROUND TEMPERATURES ABOVE 35°C (95°F) INCREASE APPROACH I.A.S. 10% AND ALLOW 20% INCREASE IN GROUND ROLL.

REMARKS

* FOR COMBAT CLIMB, REDUCE TO 2600 RPM AND 38 INCHES OF MANIFOLD PRESSURE WITHIN FIVE MINUTES AND REDUCE MANIFOLD PRESSURE 1 INCH PER 1000 FEET ABOVE 27,000 FEET.

LEGEND

I.A.S. — INDICATED AIR SPEED
NOTE ALL DISTANCES ARE AVERAGE, AND SUBJECT TO CONSIDERABLE VARIATIONS BECAUSE OF DIFFERENCES IN PILOT TECHNIQUE, LOAD, C.G., ETC.
RED FIGURES HAVE NOT BEEN FLIGHT CHECKED.

RESTRICTED

T. O. No. 01-75FB-1

SECTION III

AIRPLANE MODELS

P-38G SERIES
F-5A SERIES

TAKE-OFF, CLIMB & LANDING CHART

ENGINE MODELS

V-1710-51(RH)
V-1710-53(LH)

TAKE-OFF DISTANCE (IN FEET)

GROSS WEIGHT (IN LBS)	HEAD WIND (MPH)	HARD SURFACE RUNWAY						BOD - TURF RUNWAY						SOFT SURFACE RUNWAY					
		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.	
		GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.	GROUND RUN	TO CLEAR 50' OBJ.
15,500	0	1080	1810	1360	2270	1670	2790	1120	1870	1410	2340	1750	2910	1230	2040	1540	2570	1950	3240
	20	790	1320	1010	1680	1260	2100	820	1360	1050	1740	1330	2210	890	1480	1140	1900	1480	2470
	40	490	810	640	1060	840	1390	500	840	670	1120	890	1480	550	820	730	1220	1020	1700
17,500	0	1440	2400	1830	3040	2230	3710	1500	2490	1900	3180	2320	3870	1650	2740	2120	3540	2660	4440
	20	1070	1790	1390	2310	1720	2860	1110	1850	1440	2390	1810	3010	1220	2030	1630	2710	2140	3580
	40	700	1150	940	1560	1190	1980	720	1200	960	1600	1290	2140	800	1330	1110	1840	1600	2680
19,500	0	1880	3130	2380	3970	2960	4930	1960	3260	2510	4180	3050	5080	2190	3640	2940	4900	3180	5300
	20	1420	2370	1880	3100	2420	4040	1480	2470	1980	3300	2510	4180	1680	2800	2400	4000	2650	4420
	40	950	1580	1330	2220	1870	3120	990	1650	1450	2410	1960	3260	1150	1920	1860	3100	2040	3400

NOTE: INCREASE DISTANCE 10% FOR EACH 10°C (50°F) ABOVE 0°C (32°F)

ENGINE LIMITS FOR TAKE-OFF 2800 RPM & 44.5 IN. HG

CLIMB DATA

COMBAT MISSIONS USE 2800 RPM & 44.5 IN. HG

FERRY MISSIONS USE 2300 RPM & 31.2 IN. HG

GROSS WEIGHT (IN LBS)	TYPE OF CLIMB	5,000 FT. ALT.			10,000 FT. ALT.				15,000 FT. ALT.				20,000 FT. ALT.				25,000 FT. ALT.				BLOWER CHANGE
		BEST I.A.S.		TIME FROM SL	BEST I.A.S.		TIME FROM SL	FUEL FROM SL	BEST I.A.S.		TIME FROM SL	FUEL FROM SL	BEST I.A.S.		TIME FROM SL	FUEL FROM SL	BEST I.A.S.		TIME FROM SL	FUEL FROM SL	
		FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	FT/MIN.	
15,500	COMBAT FERRY	146	2900	2	146	2700	4	54	140	2200	6	62	135	1800	11	82	130	300	26	124	
		146	1500	4	146	1500	7	52	140	1300	11	60	135	900	20	79	130				
17,500	COMBAT FERRY	155	2400	3	155	2200	6	57	150	1700	7	68	145	1000	15	96	135				
		155	1100	5	155	1000	10	57	150	900	15	69	145	500	30	101	135				
19,500	COMBAT FERRY	170	1900	3	165	1500	8	62	160	1300	9	75	155	800	20	115	145				
		170	800	7	165	700	13	65	160	600	21	82	155	100	55	155	145				

NOTE: INCREASE ELAPSED CLIMBING TIME 5% FOR EACH 10°C (50°F) ABOVE 0°C (32°F) FREE AIR TEMPERATURE. FUEL INCLUDES WARM-UP AND TAKE-OFF ALLOWANCE

LANDING DISTANCE (IN FEET)

GROSS WEIGHT (IN LBS)	BEST I.A.S. APPROACH	HARD DRY SURFACE						FIRM DRY BOD						WET OR SLIPPERY					
		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.		AT SEA LEVEL		AT 3,000 FT.		AT 6,000 FT.	
		TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL	TO CLEAR 50' OBJ.	GROUND ROLL
13,500	100	2510	1320	2740	1450	2990	1580	2660	1470	2920	1630	3190	1780	4520	3320	5000	3710	5550	4140
15,000	105	2730	1440	2980	1580	3260	1730	2900	1610	3170	1770	3480	1950	4950	3670	5490	4090	6100	4570

NOTE: FOR BRUSHY FIELD LANDING ABOVE 31°C (88°F) INCREASE APPROACH I.A.S. 10% AND ALLOW 50% INCREASE IN GROUND ROLL.

REMARKS

* FOR COMBAT CLIMB, REDUCE TO 2600 R.P.M. AND 41 INCHES OF MANIFOLD PRESSURE WITHIN FIVE MINUTES AND REDUCE MANIFOLD PRESSURE 1 INCH PER 1000 FEET ABOVE 24,000 FEET.

LEGEND

I.A.S. — INDICATED AIR SPEED
NOTE: ALL DISTANCES ARE AVERAGE, AND
SUBJECT TO CONSIDERABLE VARIATIONS
BECAUSE OF DIFFERENCES IN PILOT
TECHNIQUE, LOAD, C.G., ETC.
RED FIGURES HAVE NOT BEEN FLIGHT CHECKED.

RESTRICTED

I. O. No. 01-75FB-1

SECTION III

5-1-5

1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)
2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
4. MANIFOLD PRESSURE (M.P.)—GALLONS PER HOUR (G.P.H.)—TRUE AIRSPEED (T. A. S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION — HOURLY RE-ESTABLISHMENT OF I. A. S. IS SUFFICIENT.
6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL. OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.

MAXIMUM CONTINUOUS POWER				DENSITY	ALTITUDE FEET	ALTERNATE CRUISING CONDITIONS																				DENSITY	ALTITUDE FEET	MAXIMUM RANGE - ENDURANCE				
R.P.M.	M.P. (H. No.)	G.P.H.	T.A.S.			I					II					III					IV							R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.
						R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.							
2800	3 8	188	388		30,000	2400	248	34	188	378	2300	228	30	108	380	2300	225	28	84	348	→					30,000	2300	195	23	87	310	
2800	3 8	180	380		25,000	2400	258	33	184	388	2300	235	29	84	330	2300	235	28	84	330	2250	225	28	88	328	25,000	2250	195	22	80	288	
2800	3 8	180	368		20,000	2380	260	32	186	340	2300	245	29	84	320	2250	240	28	81	318	2150	230	28	81	300	20,000	2150	190	21	73	260	
2800	3 8	180	358		15,000	2300	268	32	118	320	2300	255	28	84	308	2200	240	28	84	280	2100	230	27	78	278	15,000	1900	190	21	68	240	
2800	3 8	180	348		12,000	2300	270	31	114	310	2250	255	28	81	298	2150	240	28	81	280	2050	230	27	78	268	12,000	1700	190	22	61	230	
2800	3 8	180	338		9,000	2300	270	30	108	298	2200	255	28	87	280	2150	240	27	78	270	2050	230	28	88	288	9,000	1600	190	22	58	220	
2800	3 8	180	330		6,000	2300	270	28	84	280	2200	255	28	83	270	2100	240	27	74	268	2000	230	28	88	248	6,000	1600	190	21	58	210	
2800	3 8	180	320		3,000	2300	275	28	84	278	2150	255	27	80	280	2050	240	28	71	248	2000	230	28	83	230	3,000	1600	190	20	54	200	
2800	3 8	180	318	SEA LEVEL		2300	280	28	84	270	2100	260	27	77	280	2050	245	28	88	240	1950	230	28	80	220	SEA LEVEL	1600	190	20	52	190	

I.A.S.: INDICATED AIRSPEED
M.P.: MANIFOLD PRESSURE (IN. HG.)
G.P.H.: GALLONS PER HOUR (TOTAL)
T.A.S.: TRUE AIRSPEED (IN. H. - KNOTS)
F.T.: FULL THROTTLE OPERATION

P-38D **MODEL(S)** P-38E
F-4

FLIGHT OPERATION INSTRUCTION CHART

WEIGHT **17500 TO 13200** POUNDS

SHEET 2 OF 12 SHEETS
EXTERNAL LOAD ITEMS
150 OR 75 GALLON TANKS
OR 100# BOMBS

RESTRICTED

INSTRUCTIONS

ENGINE MODEL(S)
V-1710-27
V-1710-29
FOR ENGINE DATA
SEE PAGES

- (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)
1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)
 2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
 3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
 4. MANIFOLD PRESSURE (M.P.) - GALLONS PER HOUR (G.P.H.) - TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
 5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT
 6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.

STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES
—	—	613	48 GAL. TAKE-OFF &	CLIMB TO	6000 FT.	ALLOWANCE	NOT AVAILABLE IN FLIGHT				613	—	—
920	800	570	1280	1110	1520	1320	1600	1390	1710	1480	570	1800	1570
840	730	520	1170	1020	1390	1210	1480	1270	1560	1350	520	1630	1420
760	660	470	1060	920	1260	1090	1320	1150	1410	1220	470	1460	1270
670	580	420	940	820	1120	970	1180	1020	1260	1090	420	1300	1130
590	520	370	830	720	990	860	1040	900	1110	960	370	1140	990
510	440	320	720	620	850	740	900	780	980	830	320	980	880
430	380	270	610	530	720	630	760	660	810	700	270	820	710
350	310	220	490	430	590	510	620	540	660	570	220	670	580
270	240	170	380	330	450	390	480	410	510	440	170	510	440
190	170	120	270	230	320	280	340	290	360	310	120	380	310
110	100	70	160	140	190	160	200	170	210	180	70	210	180

MAXIMUM CONTINUOUS POWER				DENSITY ALTITUDE FEET	ALTERNATE CRUISING CONDITIONS																DENSITY ALTITUDE FEET	MAXIMUM RANGE - ENDURANCE								
					I					II					III					IV										
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.		R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.		I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.
2600	38	168	350	30,000	2400	220	38	188	340	2300	190	38	84	308	2300	190	38	84	308						30,000	2300	185	38	82	288
2600	38	180	350	25,000	2400	230	38	188	330	2300	205	38	84	300	2300	205	38	84	300	2200	195	38	86	288	25,000	2250	180	38	85	270
2600	38	180	340	20,000	2300	235	38	184	310	2300	220	38	84	290	2250	215	38	82	288	2150	195	37	79	268	20,000	2150	180	38	78	260
2600	38	180	330	15,000	2300	245	38	118	298	2300	230	38	84	280	2200	215	38	84	280	2050	195	37	72	240	15,000	1900	180	38	70	230
2600	38	180	320	12,000	2300	248	31	118	280	2250	230	38	80	268	2150	215	38	80	280	2050	195	36	69	230	12,000	1700	180	38	68	220
2600	38	180	318	9,000	2300	248	30	108	270	2200	230	38	88	268	2100	215	37	77	240	2000	195	36	67	228	9,000	1600	180	38	61	210
2600	38	180	308	6,000	2300	245	29	84	260	2150	230	38	88	248	2100	220	37	74	230	2000	200	36	68	218	6,000	1600	180	38	69	200
2600	38	180	300	3,000	2300	250	29	84	258	2150	230	37	78	238	2050	220	37	78	238	1950	200	36	68	208	3,000	1600	180	38	67	190
2600	38	180	298	SEA LEVEL	2300	255	29	84	260	2100	235	37	78	228	2050	220	36	69	218	1950	200	35	60	200	SEA LEVEL	1600	180	31	68	180

RANGE VALUES
IN THIS COLUMN
APPLY ONLY AT
12000 FT. ALT.

ALLOW
45 GAL.
FOR
WARM-UP
TAKE-OFF
ETC.

ALL RANGE VALUES ARE BASED ON
NO WIND - 0-10% RESERVE FUEL
12 U.S. GAL. EQUAL 10 IMP. GAL.

HEAVY NUMBERS! - USE AUTO-RICH MIXTURE
LIGHT NUMBERS! - USE AUTO-LEAN MIXTURE
WITH TWO SPEED SUPERCHARGER! - USE
HIGH BLOWER ABOVE HEAVY LINE ONLY
**RED FIGURES ARE PRELIMINARY! - SUBJECT
TO REVISION AFTER FLIGHT CHECK**

ABBREVIATIONS

I.A.S.: INDICATED AIRSPEED
M.P.: MANIFOLD PRESSURE (IN. HG.)
G.P.H.: GALLONS PER HOUR (TOTAL)
T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS)
P.T.: FULL THROTTLE OPERATION

T.O. No. 01-75FB-1

SECTION III

MODEL(S) P-38 D, P-38 E F-4				FLIGHT OPERATION INSTRUCTION CHART								SHEET 3 OF 12 SHEETS EXTERNAL LOAD ITEMS 300 GALLON TANKS																				
WEIGHT 19,000 TO 13,200 POUNDS																																
INSTRUCTIONS: (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)																																
ENGINE MODEL(S) V-1710-27 (RH) V-1710-29 (LH) FOR ENGINE DATA SEE PAGES				1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY) 2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.) 3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11) 4. MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE 5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT. 6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.																												
STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES																			
48 GAL. TAKE OFF & CLIMB TO 5000 FT. ALLOWANCE NOT AVAILABLE IN FLIGHT																																
1380	1200	938	1810	1660	2250	1950	2350	2040			890	2640	2290																			
1250	1090	890	1740	1510	2080	1780	2140	1860			810	2380	2070																			
1130	980	730	1570	1360	1850	1600	1930	1680			730	2130	1850																			
1010	870	650	1400	1210	1640	1430	1720	1490			650	1880	1630																			
880	770	570	1230	1060	1440	1250	1510	1310			570	1630	1420																			
760	660	490	1060	920	1240	1080	1300	1130			490	1380	1210																			
630	550	410	880	770	1040	900	1080	940			410	1160	1000																			
510	440	330	710	620	830	720	870	760			330	920	800																			
380	340	250	540	470	630	550	660	570			250	690	600																			
260	230	170	370	320	430	370	460	390			170	470	410																			
140	120	90	190	170	230	200	240	210			90	240	210																			
ALTERNATE CRUISING CONDITIONS																																
MAXIMUM CONTINUOUS POWER												MAXIMUM RANGE - ENDURANCE																				
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.	I				II				III				IV				DENSITY	ALTITUDE FEET	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.						
2600	35	166	330	2400	205	34	136	285	2300	185	29	94	275	2250	195	28	89	260									30,000	2300	175	28	98	285
2600	38	180	335	2350	220	33	138	315	2300	205	29	94	270	2200	200	28	91	255	2150	175	28	90	260				25,000	2250	175	28	90	260
2600	38	180	325	2300	230	33	138	300	2300	205	29	94	270	2250	195	28	89	260	2100	175	28	88	245				20,000	2150	175	28	88	245
2600	38	180	315	2250	235	32	118	280	2300	215	29	94	265	2200	200	28	84	230									15,000	1900	170	28	76	220
2600	38	180	310	2200	235	31	114	270	2250	220	29	91	255	2150	200	28	81	240									12,000	1700	170	28	69	210
2600	38	180	305	2150	235	30	109	260	2200	220	28	86	240	2100	195	27	76	225									9,000	1600	170	23	66	200
2600	38	180	300	2100	235	29	94	250	2150	215	28	82	230	2050	195	27	72	210									6,000	1600	170	24	63	190
2600	38	180	290	2050	240	28	94	245	2150	220	27	79	220	2050	200	26	70	205									3,000	1600	170	23	61	185
2600	38	180	285	2000	250	28	94	240	2100	220	27	76	215	2050	200	26	68	200									SEA LEVEL	1600	170	23	59	175
RANGE VALUES IN THIS COLUMN APPLY ONLY AT 12,000 FT. ALT.				ALLOW 48 GAL. FOR WARM-UP TAKE-OFF ETC.				ALL RANGE VALUES ARE BASED ON NO WIND - 0-10% RESERVE FUEL 12 U.S. GAL. EQUAL 10 IMP. GAL. FIGURES SHOWN ARE U.S. GALLONS				HEAVY NUMBERS:- USE AUTO-RICH MIXTURE LIGHT NUMBERS:- USE AUTO-LEAN MIXTURE I.A.S. VALUES ARE FOR WING PITOT LOCATION WITH NOSE PITOT CORRECT VALUES USING PAR. 23 RED FIGURES ARE PRELIMINARY:- SUBJECT TO REVISION AFTER FLIGHT CHECK				ABBREVIATIONS I.A.S.: INDICATED AIRSPEED M.P.: MANIFOLD PRESSURE (IN. HG.) G.P.H.: GALLONS PER HOUR (TOTAL) T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS) F.T.: FULL THROTTLE OPERATION																

31-1-3

1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)
2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
4. MANIFOLD PRESSURE (M.P.)—GALLONS PER HOUR (G.P.H.)—TRUE AIRSPEED (T. A. S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION — HOURLY RE-ESTABLISHMENT OF I. A. S. IS SUFFICIENT.
6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL. OF FUEL AVAILABLE BY G. P. H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.

<p>RANGE VALUES IN THIS COLUMN APPLY ONLY AT 6000 FT. ALT.</p>	<p>WALLOW GAL. FOR WAKE-UP TAKE-OFF ETC.</p>	<p>ALL RANGE VALUES ARE BASED ON NO WIND - 0-10% RESERVE FUEL 12 U.S. GAL. EQUAL 10 IMP. GAL. FIGURES SHOWN ARE U.S. GALLONS</p>	<p>HEAVY NUMBERS- USE AUTO-RICH MIXTURE LIGHT NUMBERS - USE AUTO-LEAN MIXTURE I.A.S. VALUES ARE FOR WING PITOT LOCATION WITH NOSE PITOT CORRECT VALUES USING PAR. 23 RED FIGURES ARE PRELIMINARY: -SUBJECT TO REVISION AFTER FLIGHT CHECK</p>	<p>ABBREVIATIONS I.A.S.: INDICATED AIRSPEED M.P.: MANIFOLD PRESSURE (IN HG.) G.P.H.: GALLONS PER HOUR (TOTAL) T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS) F.T.: FULL THROTTLE OPERATION</p>
--	---	--	--	---

Don't try to take off with one engine

MODEL(S)
P-38 F SERIES
F-4A

FLIGHT OPERATION INSTRUCTION CHART

WEIGHT 15,700 TO 13,500 POUNDS

SHEET 5 OF 12 SHEETS
EXTERNAL LOAD ITEMS
TANK SUPPORTS ONLY

5-1-42

INSTRUCTIONS

ENGINE MODEL(S)
Y-1710-49(RH)
Y-1710-52(LH)
FOR ENGINE DATA
SEE PAGES

- (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)
1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)
 2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
 3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
 4. MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
 5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT.
 6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.

STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES
400	350	300	40 GAL. TAKE-OFF & CLIMB TO 5000 FT. ALLOWANCE NOT AVAILABLE IN FLIGHT.										
370	320	260	580	510	710	610	770	670	830	720	260	910	790
		240	540	470	650	570	710	620	770	670	240	840	730
340	300	220	490	430	600	520	650	570	700	610	220	770	670
310	270	200	450	390	540	470	590	510	640	550	200	700	610
280	240	180	400	350	490	420	530	460	570	500	180	630	550
250	210	160	360	310	430	380	470	410	510	440	160	560	490
220	190	140	310	270	380	330	410	360	450	390	140	490	430
190	160	120	270	230	330	280	350	310	380	330	120	420	370
150	130	100	220	200	270	240	300	260	320	280	100	360	300
120	110	80	180	160	220	190	240	210	260	220	80	280	240
90	80	60	130	120	160	140	180	160	190	170	60	210	180

MAXIMUM CONTINUOUS POWER				DENSITY ALTITUDE FEET	ALTERNATE CRUISING CONDITIONS																DENSITY ALTITUDE FEET	MAXIMUM RANGE - ENDURANCE								
					I					II					III					IV										
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.		R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.		I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.
2600	38	172	380	30,000	2400	240	34	148	370	2300	220	30	113	348	2300	220	29	101	348	2250	215	29	88	338	30,000	2200	195	25	80	310
2600	38	200	380	25,000	2350	255	33	143	360	2300	235	29	101	330	2300	235	29	101	330	2200	220	28	89	318	25,000	2050	195	25	73	285
2600	38	200	365	20,000	2300	260	33	138	340	2300	245	29	101	320	2250	235	29	94	310	2150	225	28	83	298	20,000	1850	190	26	67	260
2600	38	200	355	15,000	2300	265	32	128	320	2300	255	29	101	308	2200	240	28	88	290	2100	225	27	77	278	15,000	1700	190	28	62	240
2600	38	200	345	12,000	2300	270	31	123	310	2250	255	29	97	295	2150	240	28	84	278	2050	230	27	74	268	12,000	1600	190	28	59	230
2600	38	200	335	9,000	2300	270	31	118	295	2250	255	29	93	280	2150	240	27	81	268	2050	230	26	71	250	9,000	1600	190	24	56	220
2600	38	200	330	6,000	2300	270	30	113	280	2200	255	28	89	270	2100	245	27	78	258	2000	230	26	68	240	6,000	1600	190	23	54	210
2600	38	200	320	3,000	2300	275	29	101	278	2200	260	28	87	268	2100	245	27	78	248	2000	230	25	65	230	3,000	1600	190	22	51	200
2600	38	200	315	SEA LEVEL	2300	280	29	101	270	2150	260	28	83	250	2050	245	26	72	238	1950	230	25	62	220	SEA LEVEL	1600	190	21	49	190

RANGE VALUES
IN THIS COLUMN
APPLY ONLY AT
12,000 FT. ALT.

ALLOW
50 GAL.
FOR
WARM-UP
TAKE-OFF
ETC.

ALL RANGE VALUES ARE BASED ON
NO WIND - 0-10% RESERVE FUEL
12 U.S. GAL. EQUAL 10 IMP. GAL.
FIGURES SHOWN ARE U.S.
GALLONS

HEAVY NUMBERS:- USE AUTO-RICH MIXTURE
LIGHT NUMBERS:- USE AUTO-LEAN MIXTURE
I.A.S. VALUES ARE FOR WING PITOT LOCATION WITH
NOSE PITOT CORRECT VALUES USING PAR. 23
RED FIGURES ARE PRELIMINARY:- SUBJECT
TO REVISION AFTER FLIGHT CHECK

ABBREVIATIONS

I.A.S.: INDICATED AIRSPEED
M.P.: MANIFOLD PRESSURE (IN. HG.)
G.P.H.: GALLONS PER HOUR (TOTAL)
T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS)
F.T.: FULL THROTTLE OPERATION

RESTRICTED

T.O. No. 01-75FB-1

SECTION II

- 54 -

RESTRICTED

MODEL(S) P-38 F SERIES F-4A				FLIGHT OPERATION INSTRUCTION CHART										SHEET 6 OF 12 SHEETS EXTERNAL LOAD ITEMS 150 OR 75 GALLON TANKS OR 1100 *BOMBS																				
WEIGHT 17,700 TO 13,500 POUNDS																																		
INSTRUCTIONS: (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)																																		
ENGINE MODEL(S) V-1710-49(RH) V-1710-53(LH) FOR ENGINE DATA SEE PAGES				1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)																														
				2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)																														
				3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)																														
				4. MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T. A. S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE																														
5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT.																																		
6. TO DETERMINE ENDURANCE IN HOURS: DIVIDE GAL. OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.																																		
STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES																					
43 GAL. TAKE-OFF & CLIMB TO 5000 FT. ALLOWANCE NOT AVAILABLE IN FLIGHT													613	TAKE OFF & CLIMB	ALLOWANCE																			
820	710	570	1170	1020	1410	1220	1520	1320	1640	1430	570	1870	1620																					
750	650	520	1070	930	1290	1120	1380	1200	1500	1300	520	1700	1470																					
680	590	470	970	840	1160	1010	1250	1090	1350	1180	470	1520	1320																					
600	530	420	870	750	1040	900	1120	970	1210	1050	420	1350	1170																					
530	460	370	760	660	920	800	990	860	1070	930	370	1180	1030																					
460	400	320	660	570	790	690	850	740	920	800	320	1020	890																					
390	340	270	560	480	670	580	720	620	780	680	270	850	740																					
320	270	220	450	390	540	470	590	510	630	550	220	690	600																					
240	210	170	350	300	420	360	450	390	490	430	170	530	460																					
170	150	120	250	210	300	260	320	280	350	300	120	370	320																					
100	90	70	140	130	170	150	190	160	200	180	70	220	190																					
MAXIMUM CONTINUOUS POWER				ALTERNATE CRUISING CONDITIONS										MAXIMUM RANGE - ENDURANCE																				
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.	I					II					III					IV					DENSITY	ALTITUDE FEET	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.				
2600	38	172	345	2350	210	33	144	330	2300	185	29	101	305	2300	185	29	101	305	2300	185	29	101	305	2300	185	29	101	305	30,000	2200	180	28	88	295
2600	38	200	350	2350	225	33	141	325	2300	205	29	101	295	2250	205	29	100	295	2250	205	29	100	295	2250	205	29	100	295	25,000	2050	180	28	80	270
2600	38	200	340	2300	235	33	134	308	2300	220	29	101	290	2250	215	29	95	280	2250	215	29	95	280	2250	215	29	95	280	20,000	1850	180	27	73	210
2600	38	200	325	2300	240	32	128	298	2300	230	29	101	280	2200	215	28	88	260	2050	195	27	73	240	2050	195	27	73	240	15,000	1700	180	27	68	230
2600	38	200	320	2300	245	31	123	290	2250	230	29	97	265	2150	215	28	85	250	2000	195	27	72	230	2000	195	27	72	230	12,000	1600	180	27	64	220
2600	38	200	315	2300	245	31	118	270	2200	230	29	93	235	2150	215	27	80	235	2000	195	26	68	220	2000	195	26	68	220	9,000	1600	180	26	61	210
2600	38	200	305	2300	250	30	118	265	2200	235	28	90	230	2100	220	27	78	230	2000	195	26	66	210	2000	195	26	66	210	6,000	1600	180	25	59	200
2600	38	200	300	2300	250	29	101	250	2200	235	28	86	235	2100	220	27	76	225	1950	195	25	64	205	1950	195	25	64	205	3,000	1600	180	24	56	190
2600	38	200	295	2300	255	29	101	245	2150	235	28	83	230	2050	225	27	73	215	1950	200	25	62	200	1950	200	25	62	200	SEA LEVEL	1600	180	23	54	180
RANGE VALUES IN THIS COLUMN APPLY ONLY AT 12,000 FT. ALT.				*ALLOW 43 GAL. FOR WARM-UP TAKE-OFF ETC.				ALL RANGE VALUES ARE BASED ON NO WIND - 0-10% RESERVE FUEL 12 U.S. GAL. EQUAL 10 IMP. GALL. FIGURES SHOWN ARE U.S. GALLONS				HEAVY NUMBERS:- USE AUTO-RICH MIXTURE LIGHT NUMBERS:- USE AUTO-LEAN MIXTURE I.A.S. VALUES ARE FOR WING PITOT LOCATION WITH NOSE PITOT CORRECT VALUES USING PAR. 23 RED FIGURES ARE PRELIMINARY:- SUBJECT TO REVISION AFTER FLIGHT CHECK								ABBREVIATIONS I.A.S.: INDICATED AIRSPEED M.P.: MANIFOLD PRESSURE (IN. HG.) G.P.H.: GALLONS PER HOUR (TOTAL) T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS) F.T.: FULL THROTTLE OPERATION														

INSTRUCTIONS (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)

1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)
2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
4. MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT.
6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL. OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR) FOR THE CONDITIONS SELECTED.

STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES
48 GALLON TAKE-OFF & CLIMB TO 5000 FT. ALLOWANCE NOT AVAILABLE IN FLIGHT.													
1230	1070	938	1780	1520	2070	1800	2210	1920			890	2640	2290
1120	980	890	1690	1460	1990	1740	2010	1780			810	2380	2070
1010	880	730	1430	1240	1700	1480	1810	1570			730	2130	1850
900	780	650	1270	1110	1510	1310	1610	1400			650	1880	1630
790	690	570	1120	970	1330	1150	1410	1230			570	1640	1420
680	590	490	960	830	1140	990	1220	1060			490	1390	1210
570	490	410	800	700	950	830	1020	880			410	1180	1000
460	400	330	650	560	770	670	820	710			330	920	800
350	300	250	490	430	580	510	620	540			250	690	600
240	200	170	330	290	400	340	420	370			170	470	410
120	110	90	180	150	210	180	220	190			90	280	210

MAXIMUM CONTINUOUS POWER				DENSITY ALTITUDE FEET	ALTERNATE CRUISING CONDITIONS																DENSITY ALTITUDE FEET	MAXIMUM RANGE - ENDURANCE									
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.		I					II					III					IV					R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.		
					R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.		I.A.S.	M.P.	G.P.H.						T.A.S.	
2600	38	172	320	30,000	2350	190	33	148	310	2300	165	29	101	278	2250	155	28	98	260							30,000	2200	175	31	93	288
2600	38	200	330	25,000	2350	215	33	140	308	2300	180	29	101	270	2250	175	28	98	260							25,000	2050	175	30	87	280
2600	38	200	325	20,000	2300	225	33	138	298	2300	200	29	101	270	2250	190	28	98	268							20,000	1850	175	30	80	240
2600	38	200	318	15,000	2300	230	31	128	280	2300	215	29	101	260	2200	195	28	88	248							15,000	1700	170	28	74	280
2600	38	200	310	12,000	2300	230	31	128	270	2250	220	29	98	255	2200	200	28	88	238							12,000	1600	170	28	70	210
2600	38	200	308	9,000	2300	240	31	120	260	2250	220	29	98	240	2100	195	27	80	220							9,000	1600	170	28	67	200
2600	38	200	298	6,000	2300	240	30	118	258	2200	225	29	91	238	2100	200	27	78	220							6,000	1600	170	27	64	190
2600	38	200	290	3,000	2300	240	30	118	248	2200	225	28	88	230	2100	205	27	77	218							3,000	1600	170	26	61	188
2600	38	200	288	SEA LEVEL	2300	245	29	101	240	2150	225	28	88	220	2100	210	26	76	208							SEA LEVEL	1600	170	26	68	178

RANGE VALUES IN THIS COLUMN APPLY ONLY AT 12,000 FT. ALT.	ALLOW 48 GAL. FOR WARM-UP TAKE-OFF ETC.	ALL RANGE VALUES ARE BASED ON NO WIND - 0-10% RESERVE FUEL 12 U.S. GAL. EQUAL 10 IMP. GALL. FIGURES SHOWN ARE U.S. GALLONS	HEAVY NUMBERS:—USE AUTO-RICH MIXTURE LIGHT NUMBERS:—USE AUTO-LEAN MIXTURE I.A.S. VALUES ARE FOR WING PITOT LOCATION WITH NOSE PITOT CORRECT VALUES USING PAR. 23 RED FIGURES ARE PRELIMINARY:—SUBJECT TO REVISION AFTER FLIGHT CHECK	ABBREVIATIONS I.A.S.: INDICATED AIRSPEED M.P.: MANIFOLD PRESSURE (IN. HG.) G.P.H.: GALLONS PER HOUR (TOTAL) T.A.S.: TRUE AIRSPEED (MPH - KNOTS) F.T.: FULL THROTTLE OPERATION
---	--	--	---	---

MODEL(S)
P-38F-SERIES
F-4A

FLIGHT OPERATION INSTRUCTION CHART

SINGLE ENGINE

WEIGHT 15,700 TO 13,500 POUNDS

SHEET 8 OF 12 SHEETS
EXTERNAL LOAD ITEMS
TANK SUPPORTS
DEAD PROPELLER FEATHERED

INSTRUCTIONS (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)

ENGINE MODEL(S)
Y-1710-49(RH)
Y-1710-63(LH)
FOR ENGINE DATA
SEE PAGES

1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)
2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
4. MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT.
6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.

STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES
600	520	300	670	580	730	630	760	660			300	680	760
550	480	275	610	530	670	580	700	610			275	610	700
500	430	250	550	490	610	530	640	560			250	740	640
450	390	225	500	430	550	480	570	500			225	660	570
400	350	200	450	390	490	430	510	440			200	590	510
350	300	175	390	340	430	370	450	390			175	510	440
300	260	150	330	290	370	320	380	330			150	440	380
250	220	125	280	240	310	270	320	280			125	370	320
200	170	100	220	190	240	210	250	220			100	290	250
150	130	75	170	150	180	160	190	170			75	220	190
100	90	50	110	100	120	100	130	110			50	150	130
50	40	25	60	50	80	50	60	50			25	70	60

MAXIMUM CONTINUOUS POWER				DENSITY ALTITUDE FEET	ALTERNATE CRUISING CONDITIONS																DENSITY ALTITUDE FEET	MAXIMUM RANGE - ENDURANCE								
					I					II					III					IV										
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.		R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.		I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.
				30,000																					30,000					
				25,000																					25,000					
2600	38	100	235	20,000	2500	160	36	80	270																20,000					
2600	38	100	230	15,000	2500	170	36	84	270																15,000					
2600	38	100	230	12,000	2500	175	36	87	215	2350	160	34	72	185											12,000					
2600	38	100	225	9,000	2500	180	36	86	210	2350	165	34	72	195											9,000					
2600	38	100	225	6,000	2450	190	36	85	210	2350	180	34	73	200	2300	160	32	64	180						6,000					
2600	38	100	220	3,000	2450	195	35	83	205	2350	180	33	71	195	2300	170	32	64	180						3,000					
2600	38	100	215	SEA LEVEL	2450	200	35	81	200	2350	190	33	70	180	2300	180	32	64	180						SEA LEVEL	2200	155	30	48	180

RANGE VALUES
IN THIS COLUMN
APPLY ONLY AT
6000 FT. ALT.

ALLOW
GAL.
FOR
WARM-UP
TAKE-OFF
ETC.

ALL RANGE VALUES ARE BASED ON
NO WIND - 0-10% RESERVE FUEL
12 U.S. GAL. EQUAL 10 IMP. GAL.
FIGURES SHOWN ARE U.S.
GALLONS

HEAVY NUMBERS:- USE AUTO-RICH MIXTURE
LIGHT NUMBERS:- USE AUTO-LEAN MIXTURE
I.A.S. VALUES ARE FOR WING PITOT LOCATION WITH
NOSE PITOT CORRECT VALUES USING PAR. 23
RED FIGURES ARE PRELIMINARY:- SUBJECT
TO REVISION AFTER FLIGHT CHECK

ABBREVIATIONS
I.A.S.: INDICATED AIRSPEED
M.P.: MANIFOLD PRESSURE (IN. HG.)
G.P.H.: GALLONS PER HOUR (TOTAL)
T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS)
F.T.: FULL THROTTLE OPERATION

Don't try to take off with one engine

MODEL(A)
P-38G SERIES
F-5A SERIES

FLIGHT OPERATION INSTRUCTION CHART

WEIGHT 15,700 TO 13,500 POUNDS

SHEET 9 OF 12 SHEETS
EXTERNAL LOAD ITEMS
TANK SUPPORTS ONLY

5-1-42

INSTRUCTIONS

ENGINE MODEL(S)
V-1710-B1 (RH)
V-1710-B5 (LH)
FOR ENGINE DATA
SEE PAGES

- (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)
1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)
 2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
 3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
 4. MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
 5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT.
 6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.

STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES
—	—	300	40 GALLON TAKE-OFF & CLIMB TO 5000 FT. ALLOWANCE NOT AVAILABLE IN FLIGHT										
360	310	260	530	460	690	560	720	620	830	720	260	910	790
330	290	240	490	430	600	520	660	570	770	670	240	840	730
310	270	220	460	390	550	470	610	530	700	610	220	770	670
280	240	200	410	350	500	430	550	480	640	550	200	700	610
250	220	180	370	320	450	390	500	450	570	500	180	630	550
220	190	160	330	280	400	350	440	380	510	440	160	560	490
200	170	140	290	250	350	300	390	350	450	390	140	490	450
170	140	120	250	210	300	260	330	290	380	350	120	420	370
140	120	100	200	160	250	220	280	240	320	280	100	350	300
110	100	80	160	140	200	170	220	190	260	220	80	280	240
80	70	60	120	110	150	130	170	140	190	170	60	210	180

MAXIMUM CONTINUOUS POWER				DENSITY ALTITUDE FEET	ALTERNATE CRUISING CONDITIONS																DENSITY ALTITUDE FEET	MAXIMUM RANGE - ENDURANCE								
					I					II					III					IV										
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.		R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.		I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.
2600	35	172	380	30,000					2300	230	32	130	360	2300	230	31	118	338	2250	215	29	98	338	30,000	2200	195	28	80	340	
2600	40	220	390	25,000	2350	260	36	168	370	2300	245	31	118	349	2250	240	31	118	348	2200	220	28	89	318	25,000	2050	195	28	73	300
2600	41	228	375	20,000	2300	270	38	186	366	2300	255	31	118	330	2200	250	31	106	328	2150	225	28	83	298	20,000	1850	190	28	67	280
2600	41	228	360	15,000	2300	280	34	147	339	2300	265	31	118	318	2200	250	30	98	303	2100	225	27	77	275	15,000	1700	190	28	62	240
2600	41	228	355	12,000	2300	280	33	141	320	2250	265	31	111	303	2150	255	28	88	290	2050	230	27	74	268	12,000	1600	190	28	58	230
2600	41	228	345	9,000	2300	280	33	138	310	2250	270	30	106	298	2150	255	28	81	280	2050	230	26	71	260	9,000	1600	190	24	58	220
2600	41	228	335	6,000	2300	280	32	131	298	2200	270	30	103	288	2150	255	28	88	270	2000	230	26	68	240	6,000	1600	190	23	54	210
2600	41	228	325	3,000	2300	285	32	128	288	2200	270	30	98	278	2100	260	28	85	268	2000	230	25	65	230	3,000	1600	190	22	51	200
2600	41	228	320	SEA LEVEL	2300	290	31	118	280	2150	270	30	98	260	2100	260	28	81	250	1950	230	25	62	220	SEA LEVEL	1600	190	21	49	190

RANGE VALUES
IN THIS COLUMN
APPLY ONLY AT
12,000 FT. ALT.

ALLOW
40 GAL.
FOR
WARM-UP
TAKE-OFF
ETC.

ALL RANGE VALUES ARE BASED ON
NO WIND - 0-10% RESERVE FUEL
12 U.S. GAL. EQUAL 10 IMP. GAL.
FIGURES SHOWN ARE
U.S. GALLONS

HEAVY NUMBERS:- USE AUTO-RICH MIXTURE
LIGHT NUMBERS:- USE AUTO-LEAN MIXTURE
I.A.S. VALUES ARE FOR WING PITOT LOCATION
WITH NOSE PITOT CORRECT VALUES USING PAR. 23
RED FIGURES ARE PRELIMINARY:- SUBJECT
TO REVISION AFTER FLIGHT CHECK

ABBREVIATIONS

I.A.S.: INDICATED AIRSPEED
M.P.: MANIFOLD PRESSURE (IN. HG.)
G.P.H.: GALLONS PER HOUR (TOTAL)
T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS)
F.T.: FULL THROTTLE OPERATION

- 58 -

RESTRICTED

RESTRICTED

T.O. No. 01-75FB-1

SECTION III

MODEL(S)
P-38 G SERIES
F-5 A SERIES

FLIGHT OPERATION INSTRUCTION CHART

WEIGHT 17,700 TO 13,500 POUNDS

SHEET 10 OF 12 SHEETS
EXTERNAL LOAD ITEMS
150 OR 75 GALLON TANKS
OR 1100# BOMBS

RESTRICTED

INSTRUCTIONS

- THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS
- OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH MAXIMUM CONTINUOUS POWER EXCEPT IN EMERGENCY)
- VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
- MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
- MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
- USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT.
- TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL. OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.

ENGINE MODEL(S)
V-1710-B1(RH)
V-1710-B5(LH)
FOR ENGINE DATA
SEE PAGES

STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES
740	640	613	1070	930	1290	1120	1430	1240	1650	1430	613	1870	1620
670	580	570	970	850	1180	1020	1300	1130	1500	1300	570	1700	1470
610	530	520	880	760	1070	930	1180	1020	1380	1180	470	1520	1320
540	470	470	790	683	950	830	1050	910	1210	1050	420	1350	1170
480	420	420	690	600	840	730	930	800	1070	930	370	1180	1030
410	360	320	600	520	730	630	800	700	920	800	320	1020	880
350	300	270	510	440	610	530	680	590	780	680	270	850	740
280	250	220	410	360	500	430	550	480	640	550	220	690	600
220	190	170	320	280	390	330	430	370	490	430	170	530	460
160	130	120	220	200	270	240	300	260	350	300	120	370	320
90	80	70	130	110	160	140	180	150	200	180	70	220	190

MAXIMUM CONTINUOUS POWER					ALTERNATE CRUISING CONDITIONS															MAXIMUM RANGE - ENDURANCE				
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.	DENSITY ALTITUDE FEET	I					II					III					IV				
R.P.M.	M.P.	G.P.H.	T.A.S.	DENSITY ALTITUDE FEET	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.
2600	35	172	345	30,000						2300	200	38	188	320	2250	195	31	113	318					
2600	40	220	360	25,000	2350	235	35	162	335	2300	215	31	118	310	2250	215	31	110	308					
2600	41	228	360	20,000	2300	245	36	184	320	2300	230	31	118	300	2200	225	31	108	290					
2600	41	228	335	15,000	2300	255	34	147	308	2300	240	31	118	290	2200	225	30	99	275	2050	195	27	78	240
2600	41	228	330	12,000	2300	255	33	148	295	2250	240	31	110	275	2150	230	30	95	268	2000	195	27	78	230
2600	41	228	320	9,000	2300	260	33	138	285	2250	245	31	108	270	2150	230	29	91	268	2000	195	26	68	220
2600	41	228	315	6,000	2300	265	32	133	275	2200	250	30	104	260	2150	230	28	88	248	2000	195	26	68	210
2600	41	228	308	3,000	2300	265	32	128	265	2200	250	30	100	250	2100	235	28	88	238	1950	195	25	64	205
2600	41	228	300	SEA LEVEL	2300	270	31	113	260	2200	250	29	96	240	2100	235	28	88	230	1950	200	25	62	200

RANGE VALUES IN THIS COLUMN APPLY ONLY AT 12,000 FT. ALT.

ALLOW 43 GAL. FOR WARM-UP TAKE-OFF ETC.

ALL RANGE VALUES ARE BASED ON NO WIND - 0-10% RESERVE FUEL IN U.S. GAL. EQUAL TO IMP. GAL. FIGURES SHOWN ARE U.S. GALLONS

HEAVY NUMBERS:- USE AUTO-RICH MIXTURE
LIGHT NUMBERS:- USE AUTO-LEAN MIXTURE
I.A.S. VALUES ARE FOR WING PITOT LOCATION, WITH NOSE PITOT CORRECT VALUES USING PAR. 23
RED FIGURES ARE PRELIMINARY:- SUBJECT TO REVISION AFTER FLIGHT CHECK

ABBREVIATIONS

I.A.S.: INDICATED AIRSPEED
M.P.: MANIFOLD PRESSURE (IN. HG.)
G.P.H.: GALLONS PER HOUR (TOTAL)
T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS)
P.T.: FULL THROTTLE OPERATION

T.O. No. 01-75FB-1

SECTION III

MODEL(S) P-38G SERIES F-5A SERIES			FLIGHT OPERATION INSTRUCTION CHART						SHEET 11 OF 12 SHEETS EXTERNAL LOAD ITEMS 300 GALLON TANKS											
WEIGHT 19,500 TO 13,700 POUNDS																				
INSTRUCTIONS (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)																				
<div>ENGINE MODEL(S) Y-171Q-5L (RM) Y-171Q-5E (LM) FOR ENGINE DATA SEE PAGE 8</div> <div>1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY) 2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.) 3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11) 4. MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE 5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT. 6. TO DETERMINE ENDURANCE IN HOURS: DIVIDE GAL OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.</div>																				
STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES							
48 GAL. TAKE-OFF & CLIMB TO 5000 FT. ALLOWANCE NOT AVAILABLE IN FLIGHT																				
1110 1010	970 880	938 890 810	1800 1410	1590 1260	1820 1780	1670 1520	2100 1910	1820 1660			890 810	2840 2380	2290 2070							
910 810 710	790 710 620	730 650 570	1310 1170 1030	1140 1010 890	1570 1400 1230	1370 1220 1070	1720 1530 1340	1490 1330 1170			730 650 570	2130 1880 1640	1880 1630 1420							
610 510 410	530 450 360	490 410 330	880 740 590	770 640 520	1060 880 710	920 770 620	1150 970 780	1000 840 680			490 410 330	1390 1160 920	1210 1000 800							
310 210 110	270 180 100	250 170 90	480 310 180	390 270 140	540 370 190	470 320 170	590 400 210	510 330 180			250 170 90	690 470 280	600 410 210							
ALTERNATE CRUISING CONDITIONS																				
MAXIMUM CONTINUOUS POWER			I II III IV											MAXIMUM RANGE - ENDURANCE						
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.	DENSITY ALTITUDE FEET	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	DENSITY ALTITUDE FEET	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.
2800	38	172	320	30,000	2300	180	31	118	298	2300	195	31	118	290	2250	190	31	107	280	
2600	40	220	340	25,000	2350	225	38	160	320	2300	215	31	118	298	2200	205	31	108	278	
2400	41	228	338	20,000	2300	235	38	164	310	2300	250	33	138	278	2200	210	30	98	260	
2800	41	228	328	15,000	2300	245	34	147	298	2300	255	38	188	300	2150	215	30	98	260	
2600	41	228	318	12,000	2300	255	33	146	288	2250	235	31	118	270	2150	215	28	91	240	
2400	41	228	310	9,000	2300	260	33	138	278	2250	240	31	108	280	2150	220	28	88	238	
2800	41	228	308	6,000	2300	265	38	188	300	2200	245	30	98	238	2100	225	28	84	220	
2600	41	228	300	3,000	2300	270	31	118	288	2200	250	30	98	238	2100	230	28	84	220	
2400	41	228	290	SEA LEVEL	2300	275	31	118	288	2200	255	30	98	238	2100	235	28	84	220	
RANGE VALUES IN THIS COLUMN APPLY ONLY AT 12,000 FT. ALT.				ALLOW 2.5 GAL. FOR WARM-UP TAKE-OFF ETC.	ALL RANGE VALUES ARE BASED ON NO WIND - 0-10% RESERVE FUEL 12 U.S. GAL. EQUAL TO IMP. GAL. FIGURES SHOWN ARE U.S. GALLONS					HEAVY NUMBERS! - USE AUTO-RICH MIXTURE LIGHT NUMBERS! - USE AUTO-LEAN MIXTURE I.A.S. VALUES ARE FOR WING PITOT LOCATION WITH NOSE PITOT CORRECT VALUES USING PAR. 23 RED FIGURES ARE PRELIMINARY! - SUBJECT TO REVISION AFTER FLIGHT CHECK					ABBREVIATIONS I.A.S.: INDICATED AIRSPEED M.P.: MANIFOLD PRESSURE (IN. HG.) G.P.H.: GALLONS PER HOUR (TOTAL) T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS) F.T.: FULL THROTTLE OPERATION					

MODEL(S)
P-38G-SERIES
F-5A-SERIES

FLIGHT OPERATION INSTRUCTION CHART

SINGLE ENGINE

WEIGHT **15,700** TO **13,500** POUNDS

SHEET 12 OF 12 SHEETS
EXTERNAL LOAD ITEMS
TANK SUPPORTS
DEAD PROPELLER FEATHERED

INSTRUCTIONS (THIS CHART APPLIES ONLY TO THE ABOVE MODELS WHILE WITHIN THE ABOVE WEIGHT LIMITS WITH ABOVE ITEMS)

ENGINE MODEL(S)
Y 1710-51(RH)
Y 1710-55(LH)
FOR ENGINE DATA
SEE PAGES

1. OPPOSITE FUEL TO BE USED LOCATE AIR MILES (RANGE) DESIRED (AVOID CRUISING WITH "MAXIMUM CONTINUOUS POWER" EXCEPT IN EMERGENCY)
2. VERTICALLY BELOW AND OPPOSITE DESIRED CRUISING ALTITUDE READ OPTIMUM CRUISING R.P.M. AND INDICATED AIRSPEED (I. A. S.)
3. MIXTURE CONTROL (AND BLOWER CONTROL IF ANY) ARE INDICATED IN LOWER HALF OF CHART (FOR DETAILED INSTRUCTIONS SEE SECT. II PAR. 11)
4. MANIFOLD PRESSURE (M.P.)-GALLONS PER HOUR (G.P.H.)-TRUE AIRSPEED (T.A.S.) ARE APPROX. MAXIMUM VALUES FOR REFERENCE
5. USE CARE IN INITIAL ADJUSTMENT OF ENGINE CONTROLS THEN AVOID MANIPULATION - HOURLY RE-ESTABLISHMENT OF I.A.S. IS SUFFICIENT.
6. TO DETERMINE ENDURANCE IN HOURS DIVIDE GAL OF FUEL AVAILABLE BY G.P.H. (GAL. PER HR.) FOR THE CONDITIONS SELECTED.

STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	STATUTE AIR-MILES	NAUTICAL AIR-MILES	FUEL* GAL.	STATUTE AIR-MILES	NAUTICAL AIR-MILES
550	480	300	600	520	670	580	730	630	830	720	300	880	760
510	440	275	550	480	610	530	670	580	760	660	275	810	700
480	400	250	500	430	560	490	610	530	690	600	250	740	640
420	360	225	480	390	500	430	550	480	620	540	225	660	570
370	320	200	400	350	460	390	490	430	550	480	200	590	510
320	280	175	350	300	390	340	430	370	480	420	175	510	440
280	240	150	300	260	330	290	370	320	420	370	150	440	380
230	200	125	250	220	280	240	310	270	350	300	125	370	320
180	160	100	200	170	220	190	240	210	280	240	100	290	250
140	120	75	150	130	170	150	180	160	210	190	75	220	190
90	80	50	100	90	110	100	120	100	140	120	50	150	130
50	40	25	60	40	60	50	60	50	70	60	25	70	60

MAXIMUM CONTINUOUS POWER					ALTERNATE CRUISING CONDITIONS															MAXIMUM RANGE - ENDURANCE				
R.P.M.	M.P. (IN. HG.)	G.P.H.	T.A.S.	DENSITY ALTITUDE FEET	I					II					III					IV				
R.P.M.	M.P.	G.P.H.	T.A.S.	DENSITY ALTITUDE FEET	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.	R.P.M.	I.A.S.	M.P.	G.P.H.	T.A.S.
				30,000																				
				25,000																				
2600	41	114	235	20,000	2600	185	41	114	235	2400	160	37	90	220										
2600	41	114	230	15,000	2550	195	40	108	240	2400	170	37	88	220										
2600	41	114	245	12,000	2500	195	40	105	234	2400	175	37	87	215	2300	160	34	72	198					
2600	41	114	240	9,000	2500	200	39	105	230	2350	180	37	85	210	2300	165	34	73	198					
2600	41	114	235	6,000	2500	210	39	100	225	2350	190	36	85	210	2300	180	34	73	200	2300	155	31	57	175
2600	41	114	230	3,000	2450	210	39	97	215	2350	195	36	83	205	2300	180	34	71	195	2300	165	31	55	175
2600	41	114	225	SEA LEVEL	2450	220	38	95	210	2350	200	36	81	205	2300	190	34	70	190	2300	175	31	53	180

RANGE VALUES
IN THIS COLUMN
APPLY ONLY AT
6000 FT. ALT.

ALLOW
GAL.
FOR
WARM-UP
TAKE-OFF
ETC.

ALL RANGE VALUES ARE BASED ON
NO WIND - 0-10% RESERVE FUEL
12 U.S. GAL. EQUAL 10 IMP. GAL.
FIGURES SHOWN ARE U.S.
GALLONS

HEAVY NUMBERS:- USE AUTO-RICH MIXTURE
LIGHT NUMBERS:- USE AUTO-LEAN MIXTURE
I.A.S. VALUES ARE FOR WING PITOT LOCATION
WITH NOSE PITOT CORRECT VALUES USING PAR. 23
RED FIGURES ARE PRELIMINARY:- SUBJECT
TO REVISION AFTER FLIGHT CHECK

ABBREVIATIONS

I.A.S.: INDICATED AIRSPEED
M.P.: MANIFOLD PRESSURE (IN. HG.)
G.P.H.: GALLONS PER HOUR (TOTAL)
T.A.S.: TRUE AIRSPEED (M.P.H. - KNOTS)
P.T.: FULL THROTTLE OPERATION

Don't try to take off with one engine

SECTION IV

OPERATIONAL EQUIPMENT


1. OXYGEN SYSTEM (Fig. 26).

a. Oxygen will be used when operating over 12,000 feet altitude except in emergency.

b. The airplanes described by this handbook are equipped with either a constant flow oxygen system, (see Fig. 25 for typical installation cockpit controls), or a demand type oxygen system (see Fig. 27 for typical installation of cockpit controls.)

c. Operation of Constant Flow Oxygen System:

(1) A rebreather type mask will be used. The mask should fit the face snugly, but not uncomfortably tight. Before flight the mask should be inspected for cleanness and deterioration with special attention given to the rebreather bag. Be absolutely sure the mask connector will fit the regulator output connector before starting airplane's engines.

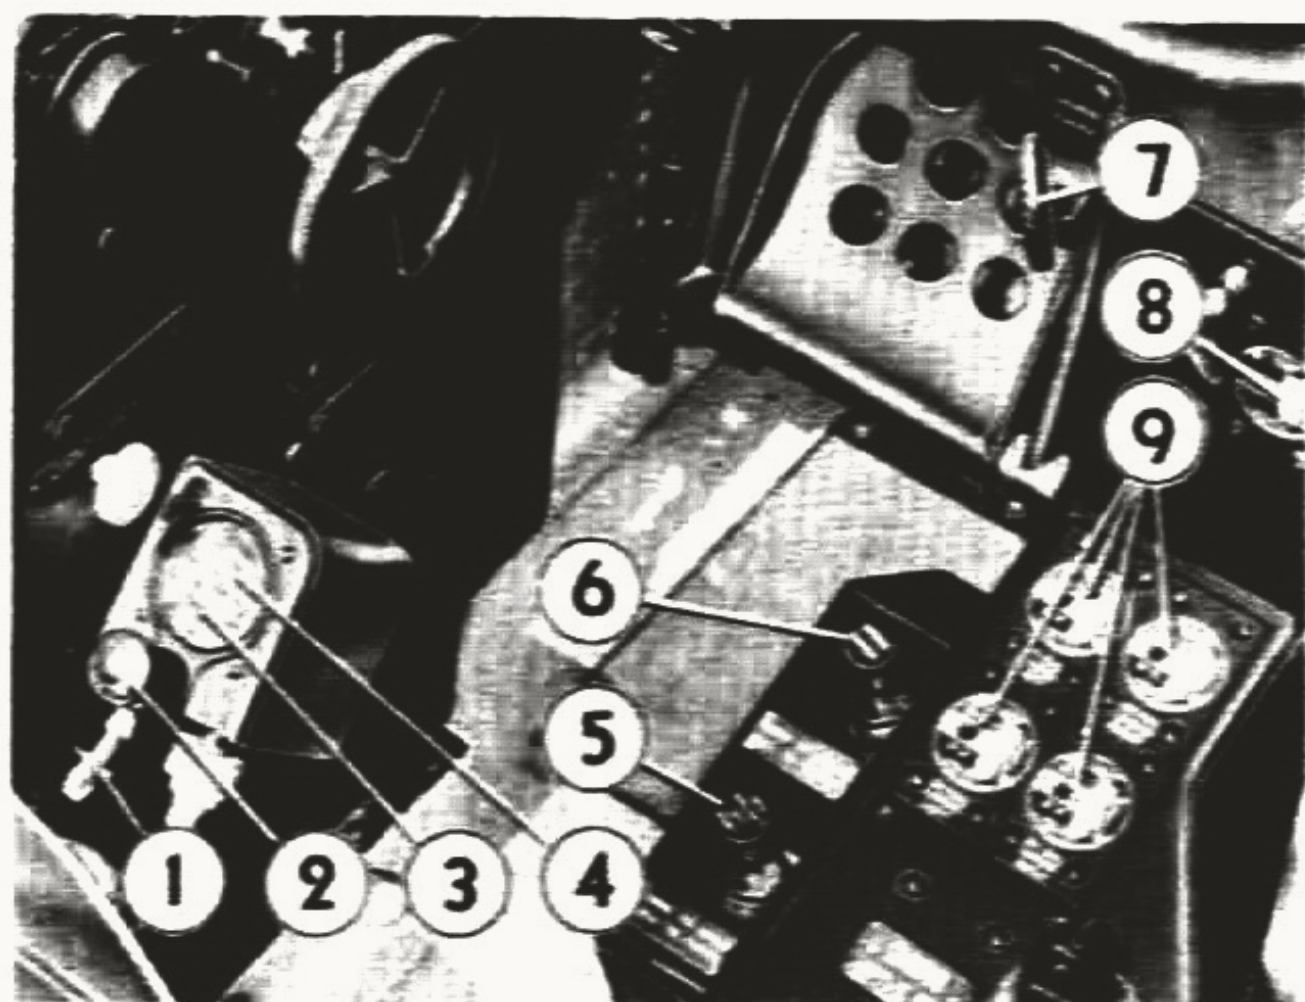

- | | |
|---|---|
| 1. Oxygen Mask Tube Connection | 5. Cannon Case Ejector Door Control |
| 2. Oxygen Regulator Valve | 6. Cannon Charger Control |
| 3. Oxygen Cylinder Pressure Indicator | 7. Cannon Loader Handle |
| 4. Oxygen Flow Indicator | 8. Cannon Rounds Counter |
| 9. Machine Gun Rounds Counters | |

FIGURE 25—CONTROLS—CONSTANT FLOW OXYGEN SYSTEM AND 37 MM CANNON

(2) Before take-off check the cylinder pressure gauge (Fig. 25-3) for sufficient oxygen supply (450 p.s.i. full).

(3) The oxygen supply to the pilot is controlled by the regulator valve (Fig. 25-2) and is adjusted for a flow corresponding to the ship's altitude on the flow indicator (Fig. 25-4).

(4) Some individuals require more oxygen than others and the flow should be increased if the pilot feels he is lacking sufficient oxygen.

CAUTION: If the mask tube is pinched or anything restricts or prevents the flow of oxygen from the regulator to the mask, the flow indicator will show a flow greater than normal. Special care shall be exercised to keep mask tube free of bends.

d. Operation of Demand Type Oxygen System:

(1) A demand type mask shall be used. The mask *must fit snugly* without leakage to prevent air leaking between face and mask. To test mask pinch the mask tube and suck lightly. The mask will be drawn in without leaking if properly fitted. In flight the mask should be tested frequently.

(2) Before take-off check the cylinder pressure gauge (Fig. 27-4) for sufficient oxygen supply (400 pounds per square inch full).

(3) The mask tube should be clipped to clothing to prevent pulling mask away from face.

(4) The correct oxygen-air mixture is supplied automatically to the pilot as demanded by normal breathing, with the emergency knob (Fig. 27-7) "OFF" and the auto mix lever (Fig. 27-3) "ON."

(5) Lack of indication by the oxygen flow indicator (Fig. 27-6) may be caused by mask leakage, or regulator failure. If readjustment of the mask does not restore flow, the emergency knob shall be turned "ON," thus bypassing a continuous oxygen flow around the regulator.

(6) Indication by the supply pressure warning light (Fig. 27-5) occurs with approximately 100 p.s.i. oxygen supply remaining.

(7) With the Auto Mix lever (Fig. 27-3) "OFF" pure oxygen is furnished to the mask.


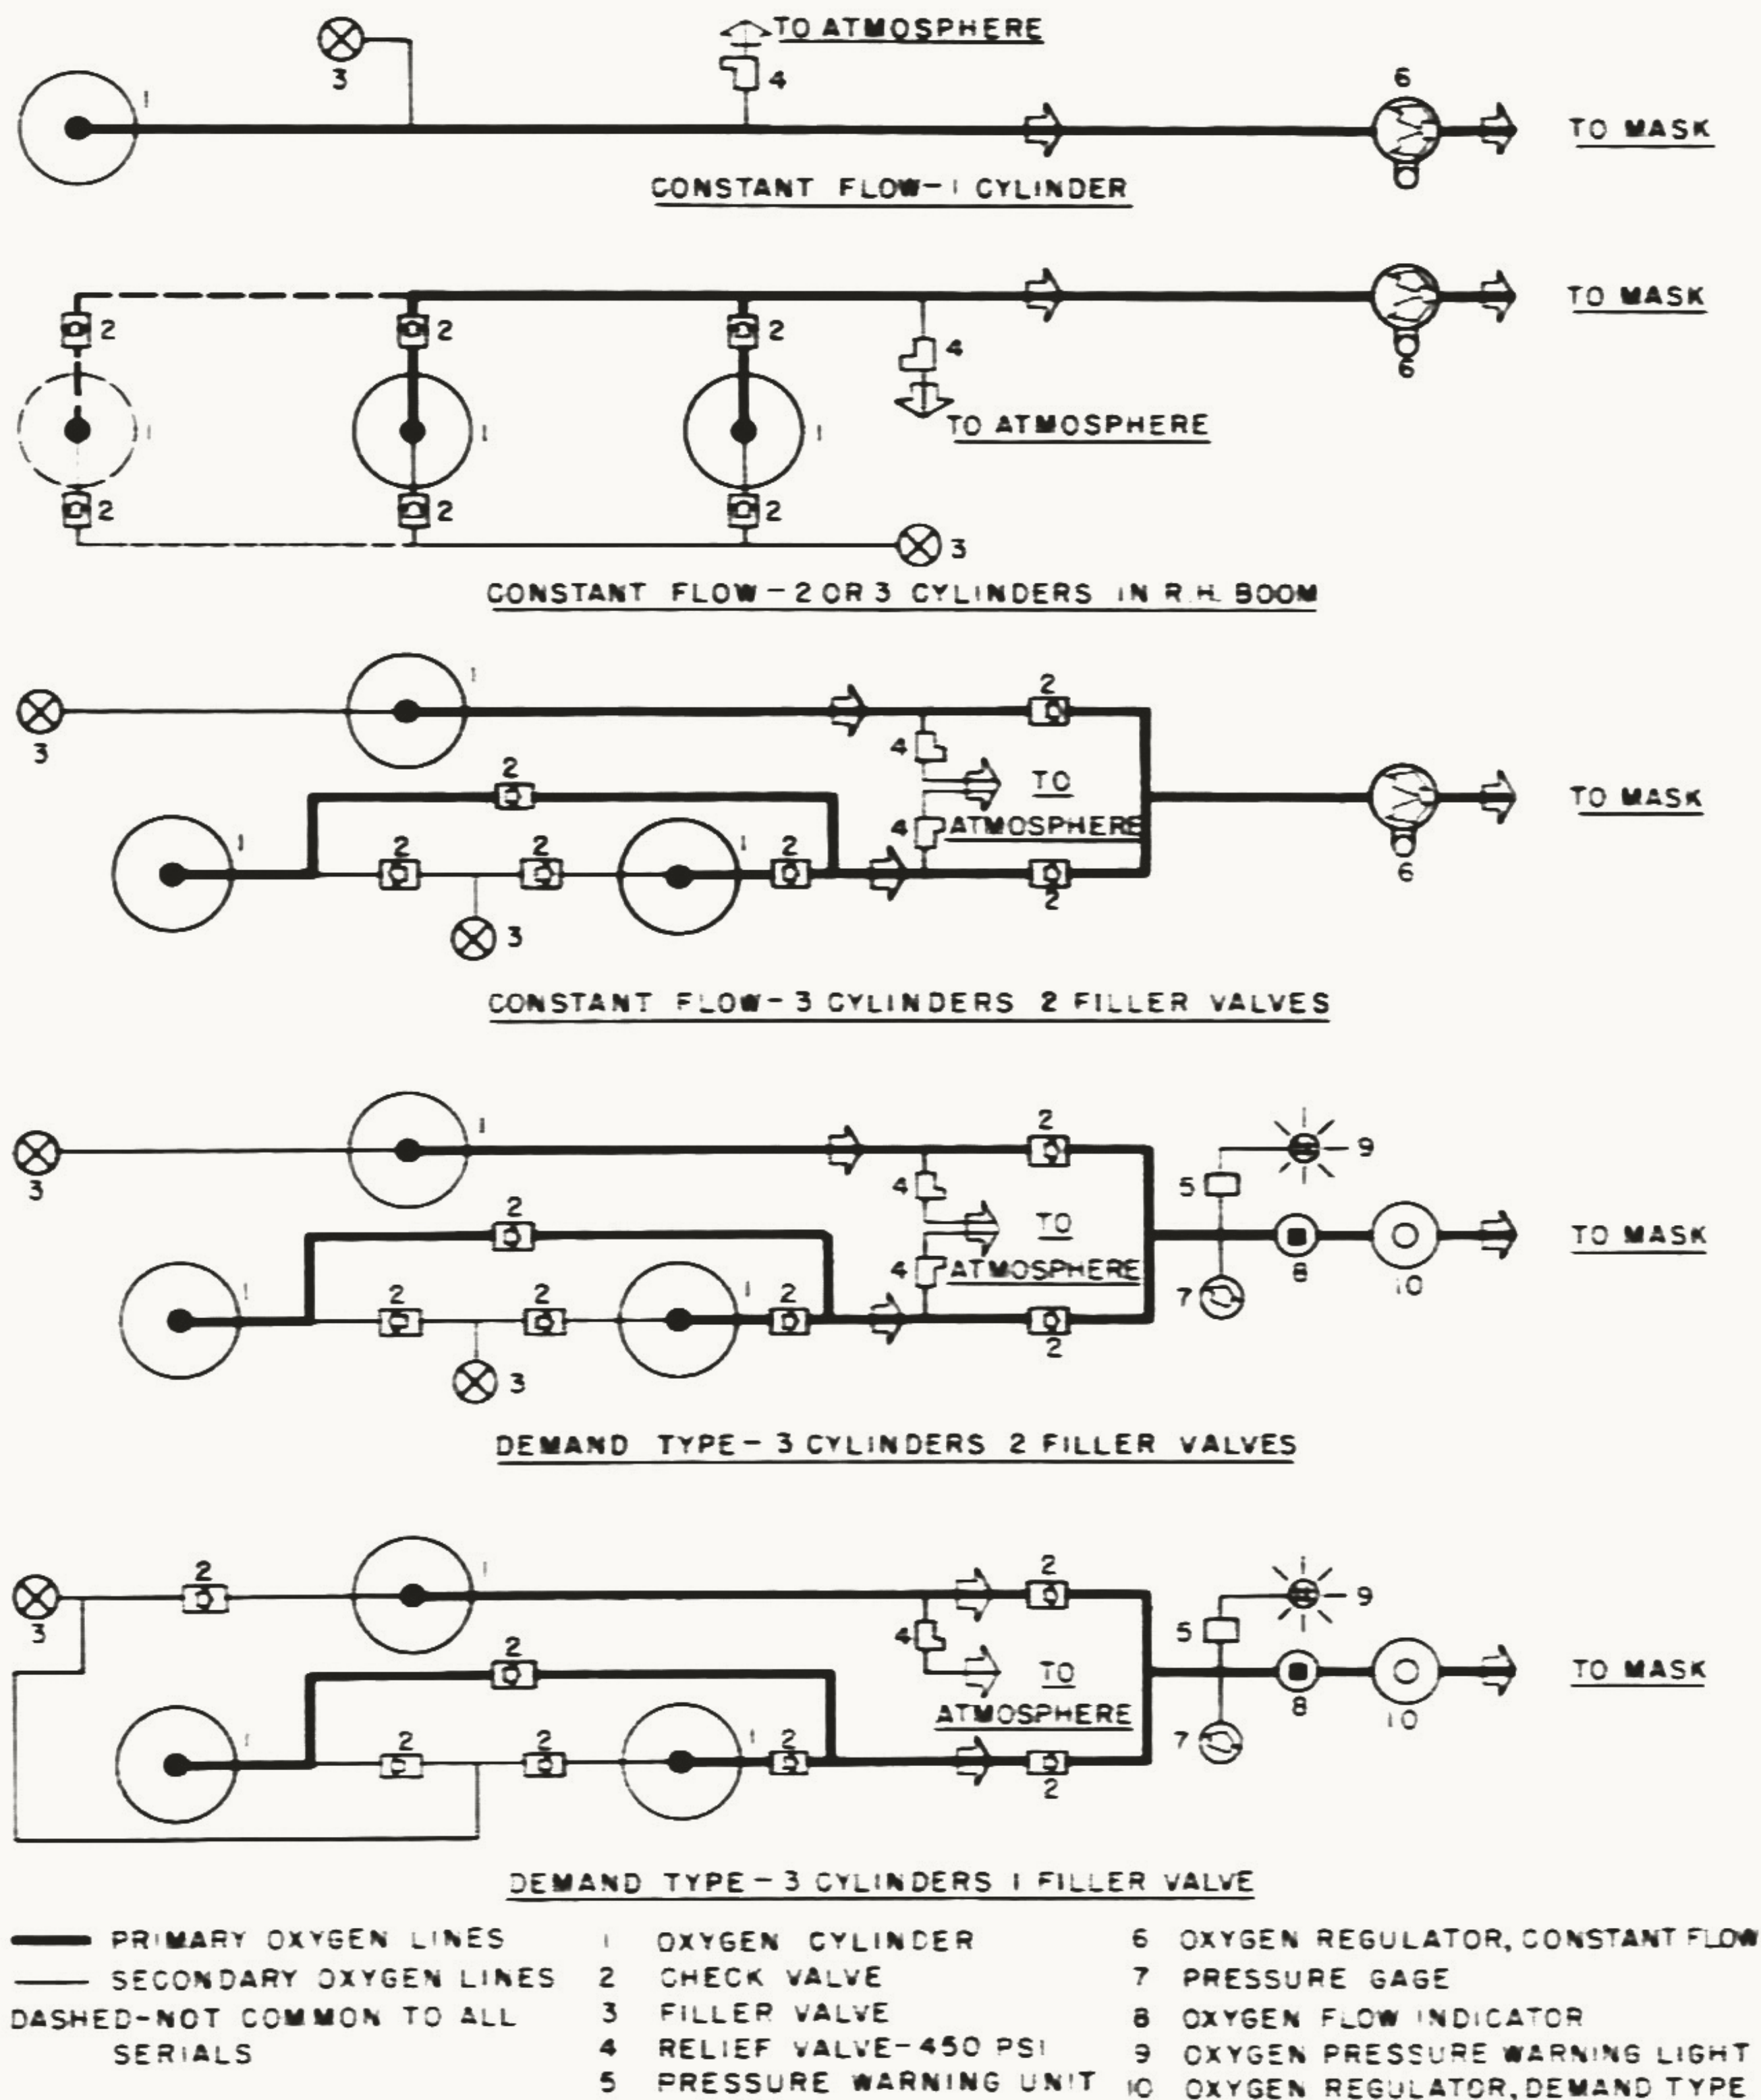


FIGURE 26—OXYGEN SYSTEMS

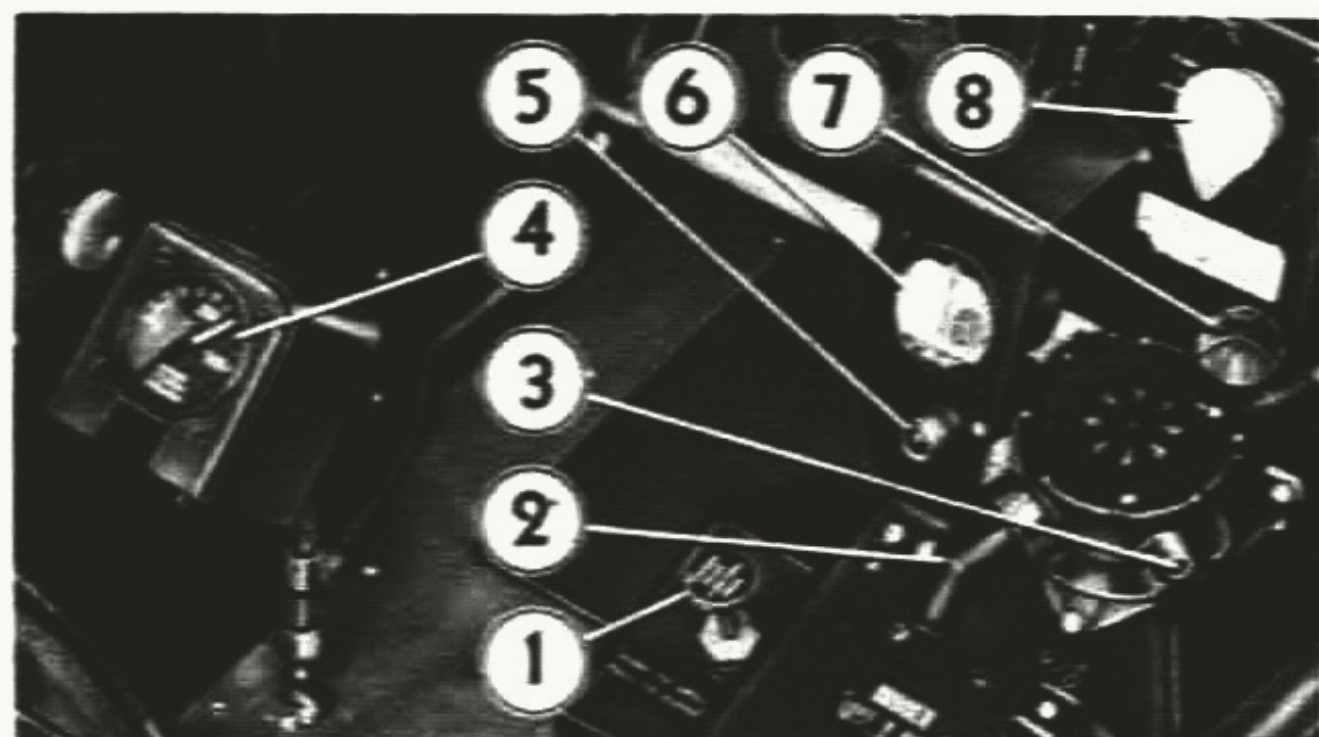

- | | |
|---|--|
| 1. . . Cannon Case Ejector Door Control | 5. Oxygen Pressure Warning Light |
| 2. . . . Oxygen Mask Tube Connection | 6. Oxygen Flow Indicator |
| 3. Auto-mix Control Lever | 7. . . . Emergency By-pass Knob |
| 4. Oxygen Cylinder Pressure Gauge | 8. Cannon Charging Control |

FIGURE 27—CONTROLS—DEMAND TYPE OXYGEN SYSTEM AND 20 MM CANNON

e. Duration:

(1) Determine the number of cylinders and type of system installed. All cylinders are carried in the booms except in the P-38D where a cylinder is carried in the fuselage nose.

(2) Duration in Man Hours (400 p.s.i. initial cylinder pressure).

Altitude	CONSTANT FLOW SYSTEM			*DEMAND SYSTEM	
	1 Cyl.	2 Cyls.	3 Cyls.	2 Cyls.	3 Cyls.
15,000 Ft.	3.5	7.0	10.75	8.5	12.75
20,000 Ft.	3.0	6.0	9.0	6.0	9.0
25,000 Ft.	2.5	5.0	7.5	4.75	7.0
30,000 Ft.	2.0	4.25	6.5	4.0	6.25

*Pilot Inactive

NOTE: The duration time for an initial cylinder pressure less than 400 p.s.i. is reduced proportionately.

Example: The duration with one F-1 cylinder and a constant flow system at 30,000 ft. with 300 p.s.i. initial pressure is:

$$2 \text{ hrs.} \times \frac{300}{400} = 1.5 \text{ hours.}$$

NOTE: The system of check valves as shown


in Fig. 26 provide equal drain from all cylinders, and prevents exhausting of the entire oxygen supply if one or two cylinders are punctured. The pressure gauge will indicate the pressure of the highest charged cylinder if all cylinders are not at equal pressure.

2. OPERATION OF COMMUNICATIONS EQUIPMENT.

a. As the airplane may be equipped with one of several different combinations of radio equipment, the pilot should first identify the equipment installed by the cockpit controls. The operation of the individual radio sets is presented separately and the section or sections applicable should be employed.

b. Operation of SCR-AL-283 Radio Set (Without Microphone pre-amplifier, Fig. 28).

(1) The radio equipment is mounted under the rear canopy and the controls are installed on the right

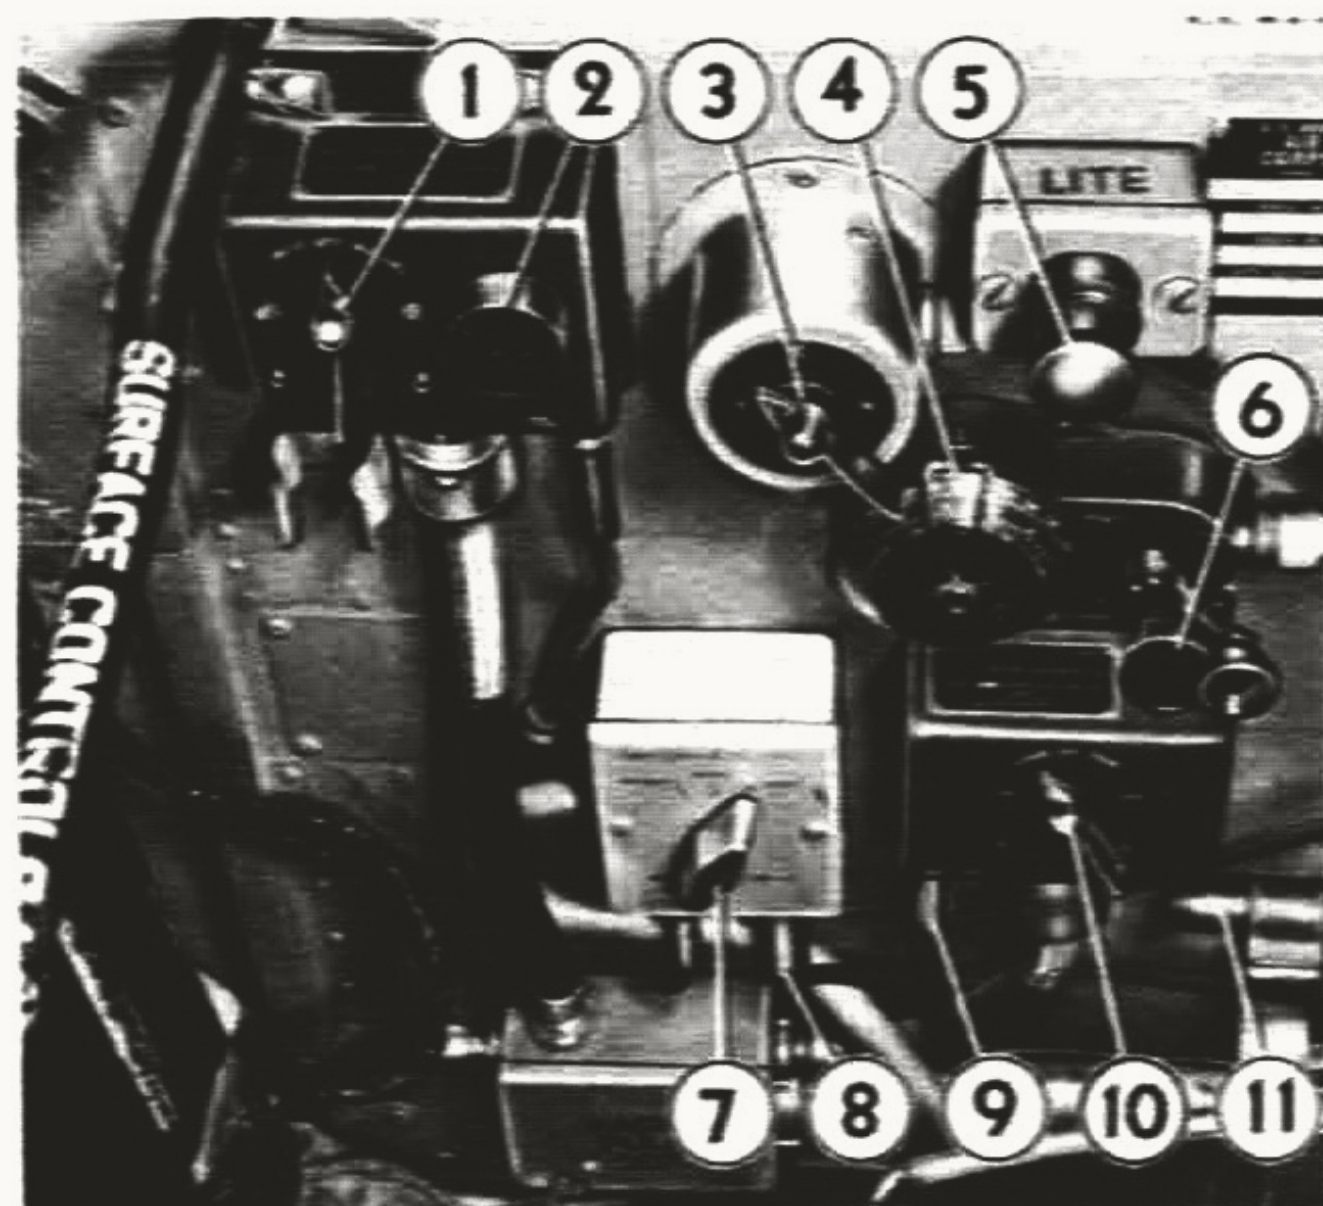

- | | |
|--|---|
| 1. Receiver Control Switch | 8. Headset Jack (Headset Extension Cord Plugged in) |
| 2. Receiver Volume Control | 9. Microphone Jack (Microphone extension cord plugged in) |
| 3. Hi-Lo Frequency Selector Switch | 10. . . Transmitter Control Switch |
| 4. Tuning Dial and Crank | 11. . . . Headset Extension cord jack (Stowed) |
| 5. Cockpit Light | |
| 6. Transmitter Key | |
| 7. . . Radio Range Switch | |

FIGURE 28—RADIO CONTROLS SCR283 RADIO SET

hand side of the cockpit. See Fig. 28.

(2) The airplane master switch (Fig. 5-3) must be "ON" to operate the radio equipment.

(3) Before take-off the pilot shall check with the radio maintenance personnel to determine that the receiver coil plugged in, covers the reception band desired and the transmitter is tuned for the proper frequency. An operational check of the equipment with the control tower or another airplane should also be made.

(4) Receiver Operation:

(a) By changing standard plug in coils receiver reception will cover the following ranges:

Frequency Range	Coil No.	Frequency Selector Switch Position	Tuning Dial Scale Used
201-396KC	C-270 Dual	LO	Front
4150-7700KC		HI	Rear
2500-4700KC	C-266 Single	Inoperative	Middle

(b) Plug headset into extension cord jack (Fig. 28-11).

(c) Turn receiver control switch (Fig. 28-1) to "MANUAL."

(d) For normal reception, set range selector switch (Fig. 28-7) to "BOTH." To receive radio range without voice interference, set selector switch to "RANGE." To receive voice without range interference, set selector switch to "VOICE."

NOTE: It is impossible to receive voice with selector switch in "Range" position.

(e) Set frequency selector switch (Fig. 28-3) to position indicated in paragraph 2 b. (4) (a) depending on coil installed.

(f) Tune receiver to desired frequency on tuning dial (Fig. 28-4) using scale indicated in paragraph 2 b. (4) (a), and adjust volume control (Fig. 28-2) to desired level.

NOTE: The front and rear tuning dial scales are calibrated directly in kilocycles (KC). The middle scale is calibrated 0-100 and a placard is mounted on the top of the receiver, giving frequency vs 0-100 tuning dial setting.

(g) Automatic Volume control is available and may be used by turning the receiver control switch (Fig. 28-1) to "AUTO."

NOTE: This receiver is not capable of receiving straight CW.

(5) Transmitter Operation:

(a) The transmitter may be pre-tuned for any one transmission frequency between 2500-7700 KC.

(b) To turn on the transmitter, the receiver switch (Fig. 28-1) must be set to either "MANUAL" or "AUTO." Allow at least one minute for transmitter to warm up before attempting transmission.

(c) Plug microphone into jack (Fig. 28-9).

(d) To transmit voice turn transmitter control switch (Fig. 28-10) to "VOICE" and press key (Fig. 28-6) during transmission period. Speak slowly with clean, sharp, distinct words.

(e) To transmit code, turn transmitter control switch (Fig. 28-10) to "CW" and operate key (Fig. 28-6). When transmitting to receivers not capable of receiving straight CW, set transmitter control switch to "TONE" and operate as before. The key travel may be adjusted by regulating the thumb screw on the bottom of the transmitter box.

NOTE: The microphone button in the center of the control wheel is inoperative when this radio is installed.

(6) A clip is provided on the side of the pilot's seat to hold microphone and head set cords.

c. Operation of SCR-274-N Radio Set:

(1) The radio equipment is mounted under the rear canopy and the controls are installed on the right hand side of the cockpit. See Fig. 29.

(2) The airplane master switch (Fig. 5-3) must be "ON" to operate the radio equipment.

(3) Before take-off the pilot shall check that the transmitter is tuned for the desired frequencies and should make an operation check of the equipment with the control tower or another airplane.


(4) Receiver Operation:

(a) Three separate receivers are installed covering 190-550 KC (kilocycles), 3-6 MC (Megacycles), and 6-9.1 MC frequency bands.

(b) Check receiver controls to be in their normal position, i.e., headset selector switches (Fig. 29-2) in intermediate position between "A" and "B," and receiver control switches (Fig. 29-1) "OFF."

(c) Plug headset into extension cord jack (Fig. 29-14).

(d) Select receiver tuning control (Fig. 29-6) covering desired reception frequency and turn corre-

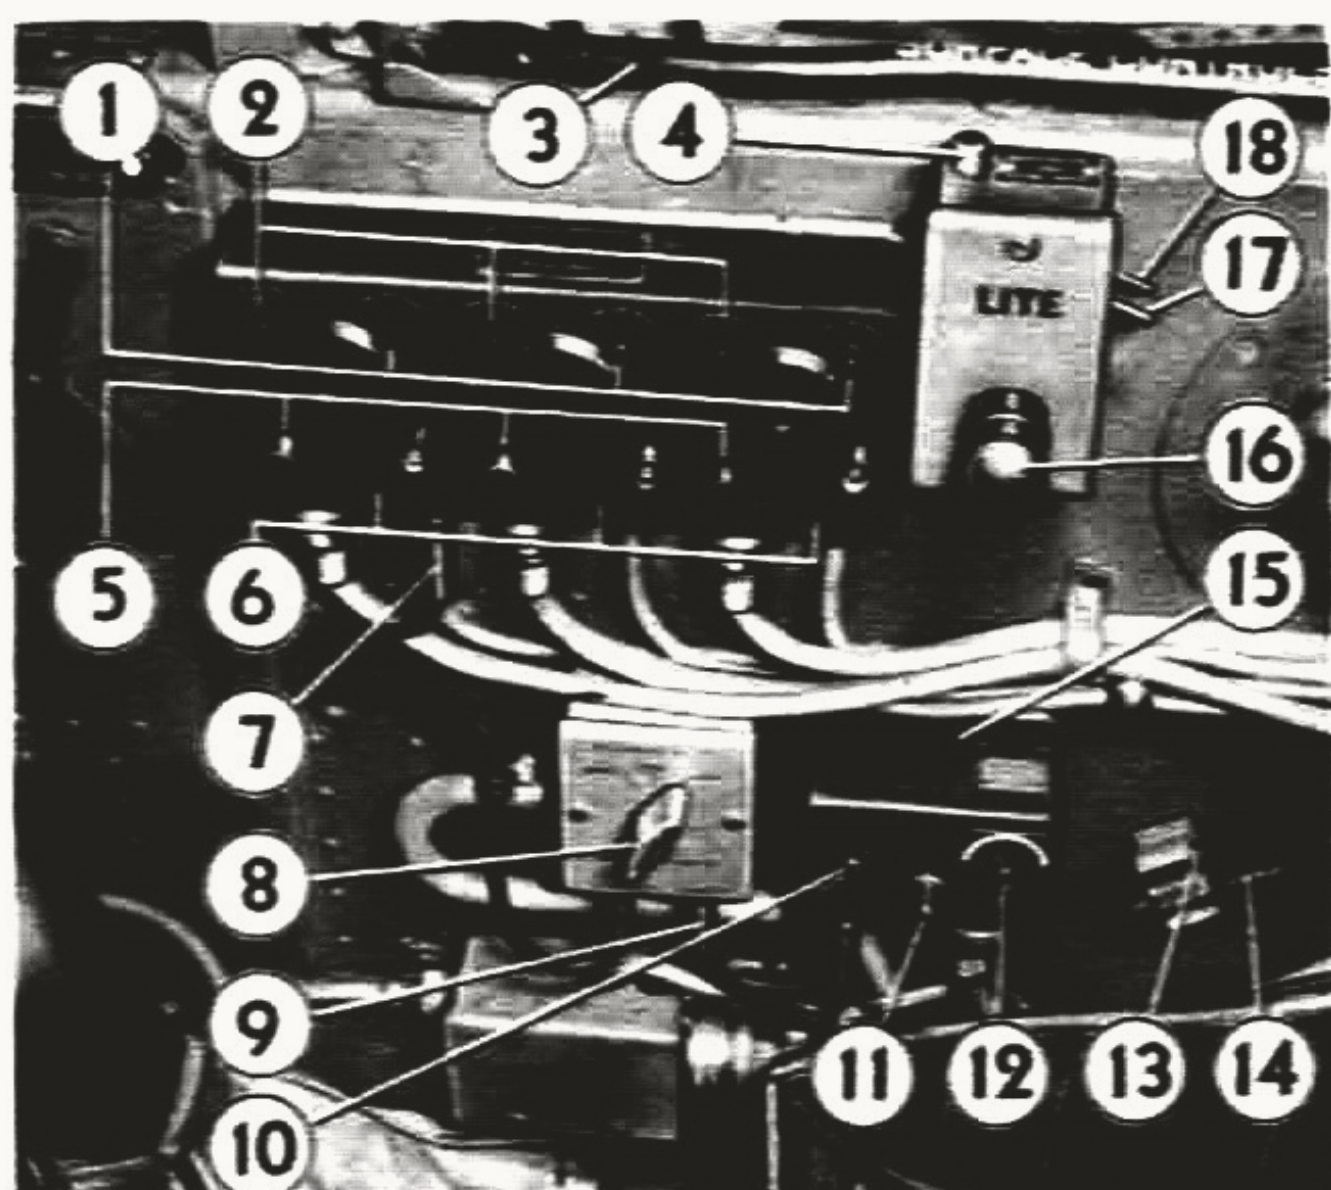

- | | |
|---|---|
| 1. Receiver Control Switches | 10. . . Transmitter Control Switch |
| 2. Headset Selector Switch | 11. . . Transmitter Power Switch |
| 3. Surface Controls Lock-Stowed | 12. . . Transmitter Selector Switch |
| 4. . . . Identification Light Keying Switch | 13. . . Microphone Jack—Stowed |
| 5. Receiver Volume Controls | 14. . . Headset—Extension Cord Jack—Stowed |
| 6. . Receiver Tuning Dial and Crank | 15. Transmitter Key |
| 7. . . Tel Plug—(plugged in "B" jack) | 16. Cockpit Light |
| 8. . Radio Range Selector Switch | 17. . Recognition Selector Switch (Top or Bottom) |
| 9. . Headset Jack—headset Extension Cord plugged in | 18. . Recognition Selector Switch (Both or Key) |

FIGURE 29—RADIO CONTROLS SCR-274 RADIO SET

sponding receiver control switch (Fig. 29-1) to "MCW" for voice or (MCW) code, or to "CW" for straight (CW) code.

(e) For normal reception, set the range selector switch (Fig. 29-8) to "BOTH." To receive radio range without voice interference, set selector switch to "RANGE." To receive voice without range interference set selector switch to "VOICE."

NOTE: It is impossible to receive voice with selector switch in "RANGE" position.

(f) Note which jack, ("A" or "B"), the tel. plug (Fig. 29-7) is in and turn the head set selector switch (Fig. 29-2) of the receiver to be employed to the corresponding position ("A" or "B").

(g) Tune receiver to desired frequency on tuning dial (Fig. 29-6) and adjust corresponding volume control knob (Fig. 29-5).

(b) To turn off receiver volume return controls to normal position (paragraph 2 c. (4) (b)).

NOTE: More than one receiver may be heard simultaneously by turning the corresponding headset selector switches to "A" or "B" (reference paragraph 2 c. (4) (f)).

(5) Transmitter Operation:

(a) Two separate transmitters are installed providing a choice of two transmission frequencies. Any two of the three transmitters procurable with frequency ranges of 4.0-5.3 MC, 5.3-7.0 MC and 7.0-9.1 MC respectively may be installed.

(b) Turn transmitter power switch (Fig. 29-11) to "ON" and allow 15 seconds for transmitter to warm up.

(c) Plug microphone into extension cord jack (Fig. 29-13).

(d) Turn transmitter selector switch (Fig. 29-12) to desired transmitter.

(e) To transmit voice, turn transmitter control switch (Fig. 29-10) to "VOICE" and press microphone button in center of control wheel (Fig. 5-37) while speaking.

(f) To transmit code, turn transmitter control switch (Fig. 29-10) to "CW" and operate key (Fig. 29-15). When transmitting to receivers not capable of receiving straight CW set transmitter control switch to "TONE" and operate as above.

(g) Turn transmitter off by switching transmitter power switch (Fig. 29-11) to "OFF."

(6) A clip is provided on the side of the pilot's seat to hold microphone and headset cords.

d. Operation of SCR-522 Radio Set:

(1) The radio equipment is located under the rear canopy and the controls are installed on the right hand side of the cockpit (see Fig. 30). Transmission and reception on four pretuned channels between 100-156 MC (megacycles) is available.

(2) The airplane master switch (Fig. 5-3) must be "ON" to operate the radio equipment.


(3) Before take-off the pilot shall check with the radio maintenance personnel to determine that the radio is tuned for the desired frequencies, and should make an operational check with the control tower or another airplane.

(4) Plug headset and microphone into jack.

NOTE: A jack with microphone and headset combined or separate jacks may be installed, located on the right side of the cockpit.

(5) Reception:

(a) Turn on the radio equipment by pressing button "A," "B," "C" or "D" (Fig. 30-1) depending on which channel is to be used.

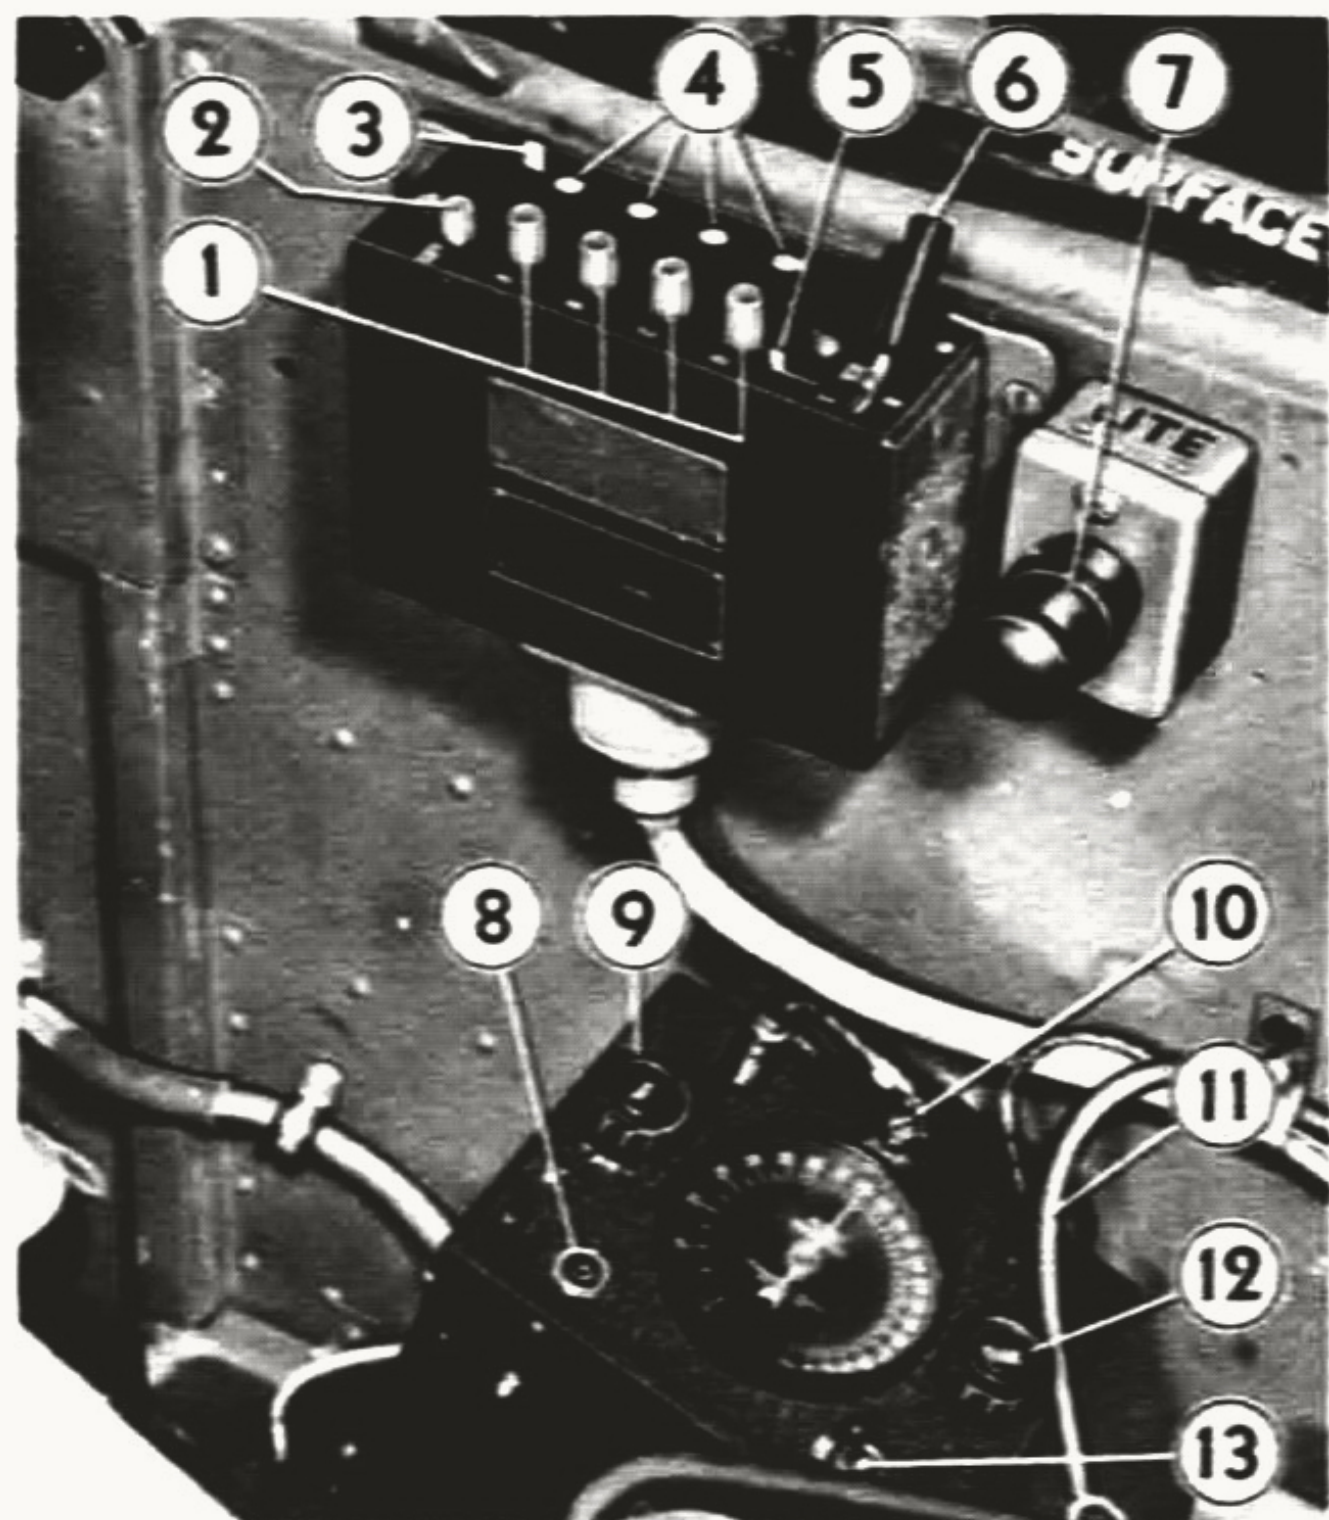

- | | |
|---|----------------------------|
| 1.....Channel Buttons
"A" "B" "C"
and "D" | 6.....Control Switch |
| 2....."OFF" Button | 7.....Cockpit Light |
| 3...Dimmer Mask Lever | 8.....Headset Jack |
| 4.....Channel Indicator
Lamps "A" "B" "C"
and "D" | 9.....Volume Control |
| 5.....Control Switch
Locking Lever | 10. Antenna Tuning Knob |
| | 11.....Connection Cord |
| | 12.....Tuning Knob |
| | 13..Receiver on-off switch |

(b) Place control switch (Fig. 30-6) in "R" position.

(6) Transmission:

(a) Turn radio equipment "ON" as in step (5) (a).

(b) ALLOW ONE MINUTE FOR TRANSMITTER TO WARM UP.

(c) Place control switch (Fig. 30-6) in "T" position.

(d) While transmitting press microphone button (Fig. 5-37) in center of control wheel and speak clearly and slowly.

(7) Remote Operation:

(a) Turn radio equipment "ON" as in step (5) (a).

(b) ALLOW ONE MINUTE FOR TRANSMITTER TO WARM UP.

(c) Place control switch (Fig. 30-6) in "REM" position.

(d) Under these conditions the receiver is normally in operation.

(e) To transmit press microphone switch in center of control wheel (Fig. 5-37) and speak slowly and clearly.

(8) To turn the radio equipment off, press "OFF" button (Fig. 30-2).

(9) A channel indicator lamp (Fig. 30-4) is lighted whenever the radio equipment is operating on the corresponding channel.

(10) The control switch indicator lamp (back of control switch in Fig. 30-6) is lighted whenever the receiver is operating, i.e., when the control switch (Fig. 30-6) is in the "R" position or reception is being obtained with the control switch in the "REM" position.


(11) The dimmer mask over the indicator lamps may be removed by pushing the dimmer mask lever (Fig. 30-3) "FORWARD."

(12) The switch locking lever (Fig. 30-5) when "ON" (rearward position) prevents throwing the control lever (Fig. 30-6) to the "REM" position and if put in "T" position the lever must be held in place or else it will spring back to the "R" position.

e. Operation of BC 608 Contactor:

(1) The contactor control (Fig. 31) is located on the instrument panel and controls automatic operation

**FIGURE 30—RADIO CONTROLS SCR522 RADIO SET
AND TYPE 185 RECEIVER**

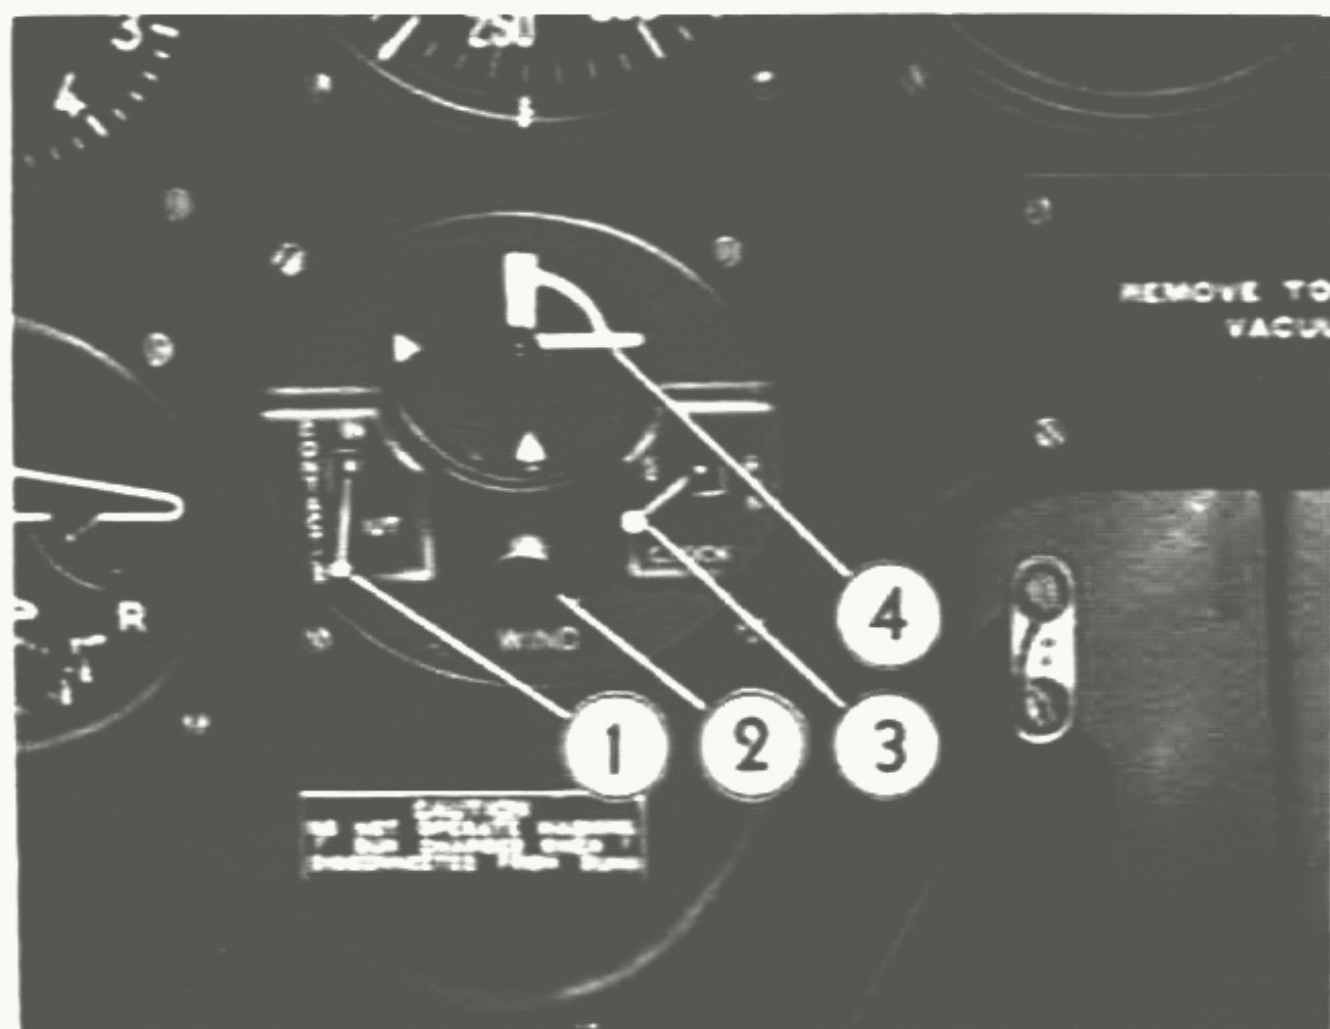

1. Contactor in-out Switch 3. Clock Stop-Run Switch
2. Clock Winding Knob 4. Clock Indicator

FIGURE 31—BC 608 CONTACTOR

of the transmitter during 15 seconds of each minute.

(2) Before take-off check that the transmitter is tuned to the proper frequency. The automatic transmission frequency with a SCR-274N radio installed is the same as frequency number 1 or with a SCR-522 radio set is the same as channel "D."

(3) Wind clock (Fig. 31-2).

(4) For synchronizing the contactor with another contactor, the clock (Fig. 31-4) may be stopped at the 12 o'clock position by switching the Stop-Run lever (Fig. 31-3) to "STOP" position. To start the clock, turn Stop-Run lever to the "RUN" position.

(5) Turn airplane's radio transmitter "ON."

(6) To turn on automatic transmission, set the contactor switch (Fig. 31-1) to the "IN" position. Transmission will take place during the period the clock hand is between the 12 o'clock and 3 o'clock positions.

NOTE: Normal reception and transmission with the airplane's radio equipment is not possible during the 15 seconds of automatic transmission.

(7) To turn off automatic transmission, turn contactor switch (Fig. 31-1) to the "OUT" position.

(8) The contactor is provided with a thermostatically controlled heater. In early airplanes the heater is wired around the airplane's master switch and is "ON" at all times. Later airplanes are equipped with a contactor heat switch which should be turned "ON" before take-off if the contactor is to be used during the flight.

f. Operation of SCR-535 Radio:

(1) The radio control box is located on the left hand side of the cockpit. See Fig. 32.

(2) The sensitivity should be set and the detonator checked before each flight by the radio maintenance personnel.

(3) Turn the knob marked "V" (Fig. 32-3) to farthest counter-clockwise position.

(4) Turn On-Off switch (Fig. 32-4) to "ON."


(5) Push button (Fig. 32-1) and turn knob "V" until the pointer on the meter (Fig. 32-2) points to the red line on the meter scale. This should be done with the engines running and the generator cut in.

NOTE: With models having two meters on the control box, adjust knob "V" as before, using voltmeter.

(6) Reset knob "V" while in flight every 15 minutes when possible.

(7) To turn radio off, turn on-off switch (Fig. 32-4) to "OFF."

(8) This radio is equipped with detonator which can be set off by a crash landing or by the pilot pressing the two buttons on the front end of the junction box directly below the radio control box simultaneously.

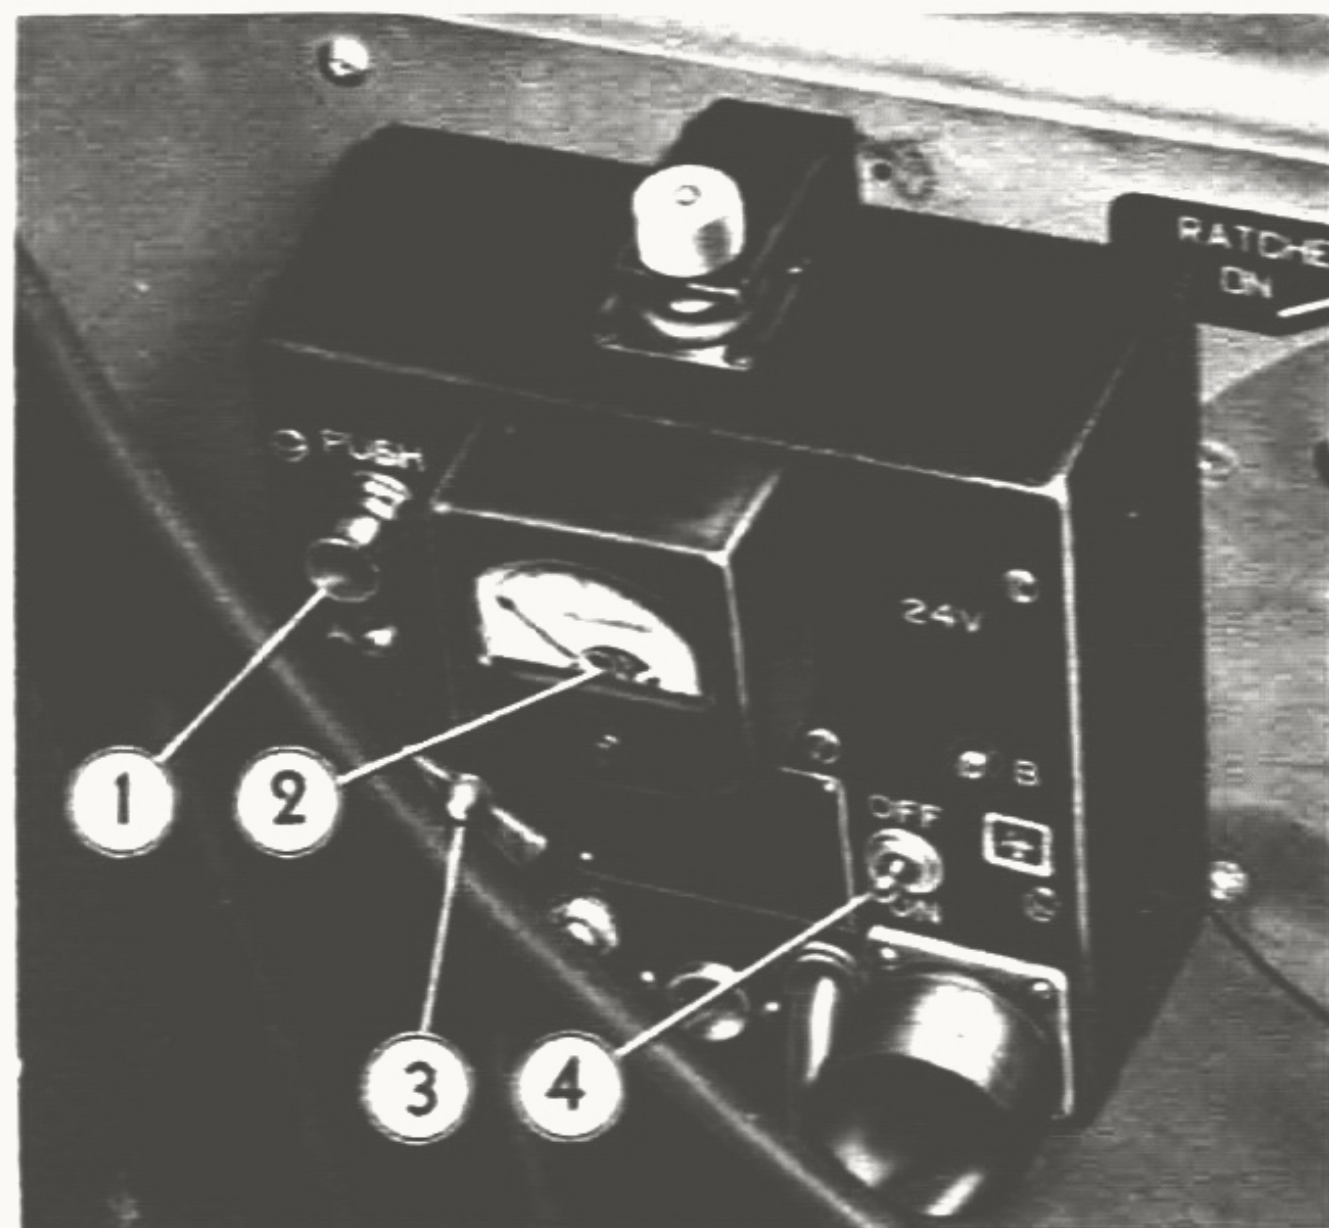

1. Push Button 3. "V" Control
2. Meter 4. On-Off Switch

FIGURE 32—RADIO CONTROL BOX SCR535

g. Operation of RCA AVR-100 or AVR-101 Receiver:

(1) This receiver is temporarily installed to supplement the SCR-522 radio installation with coverage of the 200-400 Kilocycle range. The AVR-100 also covers the broadcast band 550-1500 KC.

(2) The receiver is mounted on the right hand side of the cockpit. See Fig. 8-5.

(3) Reception is heard with the same headset connections used with the SCR-522 radio set.

(4) Set the antenna switch to the "ANT" position.

(5) On the AVR-100 set turn band selector switch to "BEACON" for 200-400 KC reception or to "BROADCAST" for 550-1500 KC reception. For reception on 278 KC turn band selector switch to "278" KC.

(6) Turn receiver "ON" and increase volume by turning volume control knob until a background noise is heard.

(7) Tune receiver to desired frequency with tuning knob.

(8) To turn receiver off, turn Volume control knob to "OFF."

b. Operation of Type 185 Receiver:

(1) This receiver is temporarily installed to supplement the SCR-522 radio installation with coverage of the 200-420 Kilocycle range.

(2) The receiver is mounted on the right hand side of the cockpit. See Fig. 30.

(3) Reception is heard with the same headset connections employed with the SCR-522 Radio Set, i.e., connection cord (Fig. 30-11) plugged into receiver jack (Fig. 30-8). If headset won't fit the SCR-522 radio jack, plug directly into the receiver jack (Fig. 30-8).

(4) Turn receiver switch (Fig. 30-13) to "ON."

(5) Turn volume control (Fig. 30-9) until a background noise is heard.

(6) Tune receiver to desired frequency with tuning knob (Fig. 30-12).

(7) For optimum performance, the antenna of the receiver should be tuned as follows:

(a) Tune receiver on a signal in the region of 600 KC, reducing volume until signal is just audible.

(b) Adjust antenna knob (Fig. 30-10) for loudest signal.

(c) Recheck operations (a) and (b).

(d) The antenna will then be aligned for entire frequency band.

(8) To turn off receiver turn receiver switch (Fig. 30-13) to "OFF."

3. OPERATION OF ARMAMENT.

- *a. All models except the RP-38D and the camera airplanes carry four 50 caliber machine guns with a total of 2000 rounds, and a 20 mm. cannon with 150 rounds.*
- *The RP-38D carries 800 rounds of 50 caliber ammunition and a 37 mm. cannon with 15 rounds. The camera airplanes carry no armament.*

b. Operation of Machine Guns:

(1) Charge machine guns as follows:

(a) Pull then turn selector knob (Fig. 6-17) to gun to be charged.

(b) Pull back charging handle (Fig. 6-16) and then push to forward position.

NOTE: Never attempt to change selector knob position EXCEPT when the charging handle is full forward.

(c) Strike selector knob with heel of the hand to release bolt. THIS OPERATION IS NECESSARY TO COMPLETE CHARGING OF GUN.

NOTE: Depending on position of first shell, it is sometimes necessary to charge a machine gun twice to insert the first live shell.

(d) Charge all machine guns to be fired as outlined in steps a, b, and c.

(2) Airplane master switch (Fig. 5-3) must be "ON."

(3) Turn armament master switch (Fig. 5-22) and machine gun switch (Fig. 5-23) "ON," or if airplane is equipped with camera-combat switch set to "COMBAT." The camera-combat switch is located in the control column switch box, if installed and replaces all other armament switches.

(4) To fire guns, press button on forward side of the control wheel (Fig. 5-33) during duration of salvo.

(5) After the first salvo the guns will not have to be charged again.

(6) Before landing, turn armament master and machine gun switches (Fig. 5-22 and 5-23) or camera-combat switch to "OFF."

c. Operation of 20 mm. cannon:

(1) Turn charging control (Fig. 26-8) to "COMBAT."

WARNING: The cannon is charged by the ground crew when loading the ammunition. NEVER PUSH CHARGING CONTROL TO CLEAR JAM IN FLIGHT BECAUSE OF THE DANGER OF AN INTERNAL EXPLOSION.

(2) Airplane master switch must be "ON."

(3) Turn armament master switch (Fig. 5-22) and cannon switch (Fig. 5-24) "ON"; or if airplane is equipped with a camera-combat switch turn it to "COMBAT."

(4) To fire cannon, press button on aft side of the control wheel (Fig. 5-36) during duration of salvo.

(5) To dispose of empty shells "PUSH" the ejection door control (Fig. 26-1) to open and "PULL" to close.

(6) Before landing, turn armament master and machine gun switches (Figs. 5-22 and 5-24) or camera-combat switch to "OFF."

d. Operation of 37 mm. Cannon (P-38D only):

(1) To charge cannon, "PUSH" cannon charger control (Fig. 25-6) for five seconds and then "PULL" control back.

(2) Pull loading handle (Fig. 25-7).

(3) Airplanes master switch must be "ON."

(4) Turn armament master switch (Fig. 5-22) and cannon switch (Fig. 5-24) to "ON."

(5) To fire cannon, press button on aft side of the control wheel (Fig. 5-36) during duration of the salvo.

(6) After the first salvo, the cannon will not have to be charged or loaded again.

(7) Before landing turn armament master and cannon switches (Figs. 5-22 and 5-24) to "OFF."

e. Airplanes before serial number 42-12567 are equipped with gun blinker lights (Fig. 4-25) which glow when the bolts are locked open. The blinker lights may be turned "ON" or "OFF" by the blinker light switch (Fig. 5-26).

f. Operation of Optical Gun Sight:

(1) Airplane's master switch must be "ON."

(2) Turn gun sight switch—rheostat (Fig. 5-28) "ON" and adjust brilliancy so that the "Bulls-eye" or "Cross-hair" appear on glass slide mounted in front of pilot's face.

(3) Sight target through "bulls-eye" in glass slide.

(4) Some sights are equipped with a sun shade which may be installed on top of the sight reflector or stowed in a box over the fuel selector valves.

g. Operation of Gun Camera:

(1) Airplane's master switch must be "ON."

(2) Turn armament switch (Fig. 5-22) and camera switch (Fig. 5-25) "ON" or if airplane is equipped with camera-combat switch turn it to "CAMERA."

(3) Camera will operate when cannon or machine gun button is pressed.

b. Turn armament compartment heat control (Fig. 9-1) "ON" if outside air temperature (Fig. 4-10) is below 0°C. (32°F.).

i. To Drop Bombs (Gear and Flaps Up):

(1) Turn arming switch (Fig. 7-3) to "ARM" or "SAFE." Indicator lights (Fig. 7-4 and 7-5) are provided to show the position of the arming switch.

(2) Turn selector switch (Fig. 7-10) "ON" for bombs to be dropped. Indicator lights (Fig. 7-9) are provided to show which selector switch is "ON."

(3) With the landing gear and flaps retracted and while flying at an angle not over 30° from the horizontal. Press the release button (Fig. 7-11) to drop bombs.

4. OPERATION OF PHOTOGRAPHIC EQUIPMENT.

a. The operation of the camera equipment in the F-4 series and F-5 series airplanes is similar. The cameras are installed in the fuselage nose with the following arrangements provided for:

F-4 OR F-4A AIRPLANE

ARRANGE- MENT	CHART CAMERAS	RECONNAISSANCE CAMERAS
Normal	3 Type K-17 (6 in.)	1 Type K-17 (24 in.)
Alternate	3 Type K-17 (6 in.)	1 Type K-17 (12 in.)

F-5A AIRPLANE

ARRANGE- MENT	CHART CAMERAS	RECONNAISSANCE CAMERAS
Normal	3 Type K-17 (6 in.)	2 Type K-17 (24 in.)
Alternate	1 Type K-17 (6 in.)	3 Type K-17 (24 in.)
Alternate	1 Type K-17 (6 in.)	1 Type K-17 (12 in.) 2 Type K-17 (24 in.)
Alternate	1 Type K-17 (6 in.)	1 Type K-17 (24 in.) 1 Type K-18 (24 in.)
Alternate	1 Type K-17 (6 in.)	1 Type K-17 (12 in.) 1 Type K-18 (24 in.)
Alternate	3 Type K-17 (6 in.)	1 Type K-18 (24 in.)

b. Ground operations (for photographer):

(1) The photographer should be familiar with the normal operation of the K-17 and K-18 cameras.



- | | |
|---|--|
| 1. BLINKER LIGHT PANEL | 6. RECONNAISSANCE INTERVALOMETER SWITCH |
| 2. CAMERA COMPARTMENT TEMPERATURE GAUGE | 7. BLINKER LIGHT SWITCH |
| 3. AMBER LIGHT | 8. CAMERA CONTROL BUTTON (Aft Side of Wheel Shown) |
| 4. PHOTOGRAPHIC EQUIPMENT—MASTER SWITCH | 9. VACUUM CONTROL LEVER |
| 5. CHART INTERVALOMETER SWITCH | 10. INTERVALOMETER (Chart Shown) |

FIGURE 33—PHOTOGRAPHIC EQUIPMENT CONTROLS
(F-4 AIRPLANES)

(2) Owing to the limited space, the dark slides must be removed before installation of magazines. With this in mind, the entire daylight loading leader should not be rolled on the take-up spool thus preventing unnecessary fogging of the film and permitting sufficient exposures to check the operation of the camera controls without exposing film.

(3) Just prior to take-off, set correct shutter speeds and diaphragm openings, as the cameras are not accessible in flight. It is recommended that owing to the speed of the airplane, the highest possible shutter speed be used in all cases. Failure to do so may result in blurred negatives. It is also recommended that the diaphragm opening be set at one-half to one stop open from normal, for exposure on a clear sunny day. If the sky becomes overcast after take-off, a near normal exposure will be made. If it remains clear, the film will be slightly over-exposed which is far more desirable than under-exposed; for if over-exposed the film can be chemically reduced or under-developed and a normal print made therefrom.

(4) The camera windows in the bottom of the fuselage nose may have to be protected against spray from the nose wheel when taking off from muddy or wet or oily runways and the following expedient has been found satisfactory:

(a) Cut a piece of ordinary cardboard to the size of the visible glass area. Attach this over the glass with two pieces of masking or adhesive tape, one across the front side and one across the back. Before applying the front tape, run a stout cord along the edge of the window frame just ahead of the cardboard and run the tape over the cord. Tie a loop in the cord so as to cause it to encircle the tape. Tie the other end of the cord to the nose wheel strut, taking up all possible slack. This is repeated for the other window. Retraction of the nose wheel will pull off the front tapes, causing the cardboard covers to blow away.

(5) A piece of tape should be put over any inoperative blinker lights (Fig. 33-1) for the pilot's information.

(6) The photographer should fill out photographic data sheet "A" before the airplane takes off.

c. Camera Operation (for pilot):

(1) Before take-off the pilot shall ascertain which cameras are installed and that the ship is *properly balanced*. THIS IS IMPORTANT. See Section III.

(2) Automatic Operation, Using Intervalometer:

(a) Determine time interval from INTERVALOMETER SETTING TABLE (Fig. 34).

(b) Adjust chart and/or reconnaissance intervalometers by raising the time setting dial and turning to desired value. The "CHART" intervalometer is mounted between the pilot's legs (Fig. 33-10) and the "RECON" intervalometer is either on the left or right hand side of the pilot's seat.

(c) Throw chart toggle switch (Fig. 33-5) and/or Reconnaissance switch (Fig. 33-6) to "INTERVALOMETER."

(d) Throw blinker light toggle switch (Fig. 33-7) to "ON."

(e) Throw camera master switch (Fig. 33-4) to "ON."

(f) Turn vacuum control valve (Fig. 33-9) "ON."

*(g) Check individual camera switches "ON" for operative cameras. The switches are installed on the blinker light panel adjacent to the corresponding blinker light.

(b) To start continuous automatic exposure press camera button (Fig. 33-8) on aft side of the wheel "IN AND RELEASE."

(i) Observe blinker lights (Fig. 33-1) to check camera operation.

*1. Adjust lights to desired brightness by turning lens holders.

2. The clear lamps will light 3 seconds before an exposure is made. During this warning period, the pilot must steady the airplane.

3. The green blinker lights indicate that film is winding. Any lamp that is steadily "ON" or steadily "OFF" indicates that the corresponding camera is not operating. *Turn the individual camera switch of any camera not operating "OFF" to prevent possible camera damage.

(j) To stop continuous automatic exposures, press camera button (Fig. 33-8) on aft side of the wheel "IN AND RELEASE."

(3) Manual Operation—single exposures or run-away operation:

(a) Throw chart toggle switch (Fig. 33-5) and/or Reconnaissance switch (Fig. 33-6) to "MANUAL"

Operations marked with asterisk () apply to F-5 series airplanes only.

(g) For runaway operation, press camera button on forward side of wheel "IN AND HOLD" or press camera button on aft side of wheel (Fig. 33-8) "IN AND RELEASE."

19

- I certify that the above camera has been installed in aircraft No. _____ under my supervision, this date, and is ready for use.

(6) The pilot should fill out photographic Data Sheet "B" on completion of each photographic flight.

1. Weather conditions _____
2. Altitude (true) _____
3. Exposures made _____
4. Approximate time _____
5. Area covered _____

Pilot

Magazine taken up five (5) exposures_____

Photographer

AIRPLANE'S AIRSPEED INDICATOR READING—MPH																	INTERVALOMETER SETTING—SEC.																	CAMERA	
Airplane's Altimeter Reading (1,000 Ft.)—Altimeter Set at 29.92" Hg.																	Altitude Above Ground—1,000 Ft.																		
6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38		
180	170	165	160	155	150	145	140	130	125								9	12	15	18	21	27	30	33	36	39	42	45	48	51	54	57	60	6 Inch Camera	
210	200	195	185	180	170	165	160	150	145	140	135	125					9	12	12	15	18	21	24	27	30	33	36	39	42	45	48	51	54		
235	230	220	215	205	195	185	180	170	165	160	150	145	140	135	125		9	9	12	15	18	21	24	27	27	30	33	36	39	42	45	45	48		
260	255	245	240	230	225	215	205	195	190	180	170	165	160	150	145	140	6	9	12	15	15	18	21	24	27	27	30	33	36	39	42	45	42		45
285	275	270	260	250	245	235	230	220	210	200	190	180	175	170	160	155	6	9	12	12	15	18	18	21	24	27	27	30	33	33	36	39	42		
310	300	290	280	275	265	260	250	240	230	220	215	205	195	185	180	170	6	9	9	12	15	15	19	21	21	24	27	27	30	33	33	36	36		
330	320	310	300	295	285	280	270	260	250	240	230	225	215	205	195	190	5*	6	9	12	12	15	15	18	21	21	24	27	27	30	30	33	36		
355	345	335	325	315	310	300	290	280	270	260	250	240	230	225	215	205	5*	6	9	9	12	12	15	18	18	12	21	24	27	27	30	30	33		
380	370	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	5*	6	9	9	12	12	15	15	18	18	21	21	24	27	27	30	30		
Airplane's Altimeter Reading (1,000 Ft.)—Altimeter Set at 29.92" Hg.																	Altitude Above Ground—1,000 Ft.																		
6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38		
180	170	165	160	155	150	145	140	130	125								5*	6	9	9	12	12	15	15	18	18	21	21	24	27	27	30	30	12 Inch Camera	
210	200	195	185	180	170	165	160	150	145	140	135	125					4*	6	6	9	9	12	12	15	15	18	18	21	21	24	24	27	27		
235	230	220	215	205	195	185	180	170	165	160	150	145	140	135	125		4*	5*	6	9	9	9	12	12	15	15	18	18	18	21	21	24	24		
260	255	245	240	230	225	215	205	195	190	180	170	165	160	150	145	140	3"	5*	6	6	9	9	9	12	12	15	15	15	18	18	21	21	21		
285	275	270	260	250	245	235	230	220	210	200	190	180	175	170	160	155	3"	4*	5*	6	6	9	9	12	12	12	15	15	15	18	18	18	21		
310	300	290	280	275	265	260	250	240	230	220	215	205	195	185	180	170	3"	4*	5*	6	6	9	9	9	12	12	15	15	15	18	18	18			
330	320	310	300	295	285	280	270	260	250	240	230	225	215	205	195	190	3"	4*	5*	5*	6	6	9	9	9	12	12	12	15	15	15	15			
355	345	335	325	315	310	300	290	280	270	260	250	240	230	225	215	205	3"	3"	4*	5*	6	6	9	9	9	9	12	12	12	15	15	15			
380	370	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	2"	3"	4*	5*	5*	6	6	9	9	9	9	12	12	15	15	15			
Airplane's Altimeter Reading (1,000 Ft.)—Altimeter Set at 29.92" Hg.																	Altitude Above Ground—1,000 Ft.																		
6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38		
180	170	165	160	155	150	145	140	130	125								2"	3"	4*	5*	5*	6†	6†	9	9	9	9	12	12	12	15	15	15	24 Inch Camera	
210	200	195	185	180	170	165	160	150	145	140	135	125					2"	3"	4*	4*	5*	6†	6†	6†	9	9	9	9	12	12	12	12	12		
235	230	220	215	205	195	185	180	170	165	160	150	145	140	135	125		2"	3"	3"	4*	4*	5*	6†	6†	6†	9	9	9	9	9	12	12	12		
260	255	245	240	230	225	215	205	195	190	180	170	165	160	150	145	140	2"	2"	3"	3"	4*	5*	5*	6†	6†	6†	9	9	9	9	9	12			
285	275	270	260	250	245	235	230	220	210	200	190	180	175	170	160	155	2"	2"	3"	3"	4*	4*	5*	5*	6†	6†	6†	9	9	9	9	9			
310	300	290	280	275	265	260	250	240	230	220	215	205	195	185	180	170	1"	2"	2"	3"	3"	4*	4*	5*	5*	6†	6†	6†	6†	9	9	9			
330	320	310	300	295	285	280	270	260	250	240	230	225	215	205	195	190	1"	2"	2"	3"	3"	4*	4*	5*	5*	5*	6†	6†	6†	6†	9	9			
355	345	335	325	315	310	300	290	280	270	260	250	240	230	225	215	205	1"	2"	2"	3"	3"	3"	4*	4*	5*	5*	5*	6†	6†	6†	6†	9			
380	370	360	350	340	330	320	310	300	290	280	270	260	250	240	230	220	1"	1"	2"	2"	3"	3"	4*	4*	4*	5*	5*	5*	6†	6†	6†	6†	9		

To determine intervalometer setting: (1) Find airplane's altimeter reading in left hand side of table; (2) Follow down to first indicated airspeed higher than airplane's airspeed; (3) Follow across horizontal to intervalometer setting below distance above the ground.

Time intervals marked (*) are too short for type B-2 intervalometer use, but may be used on runaway operation.

Time intervals marked (") are too short even for runaway operation with K-17B camera.

Time intervals marked (†) are too short for runaway operation with K-18 camera.

FIGURE 34—INTERVALOMETER SETTING (60% Over Lap)

APPENDIX I

U.S.A. - BRITISH GLOSSARY OF NOMENCLATURE

U. S. A.	BRITISH
Accumulator (hydraulic).....	Should not be confused with electrical accumu- lator or battery
Battery (electrical).....	Electrical accumulator
Check valve (hydraulic).....	Non-return valve
Cylinder (hydraulic).....	Jack
Flight Indicator.....	Artificial horizon
Gross weight.....	All up weight
Gyro horizon.....	Artificial horizon
Gyro pilot.....	Automatic pilot
Manifold pressure.....	Boost
Outboard Panel.....	Outer plane
Propeller.....	Airscrew
Reticule (gun sight, etc.).....	Graticule
Tachometer.....	Engine speed indicator
Turn indicator.....	Direction indicator
Valve (fuel or oil).....	Cock
Weight empty.....	Tare